


# EMXX-0102


## mPCIe to M.2 B key Module

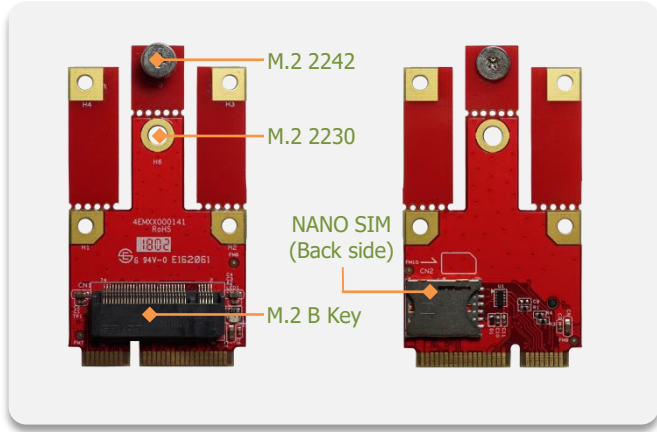

### Features

- Support M.2 2230/2242 B key form factor
- Compliant with PCI Express Base Specification
- Compliant with Universal Serial Bus 2.0 Specification
- Compliant with SATA III Specification
- Industrial temperature -40 °C to 85 °C
- 30μ" golden finger, 3-year warranty
- Industrial design, manufactured in innodisk Taiwan

### Mechanical Drawing

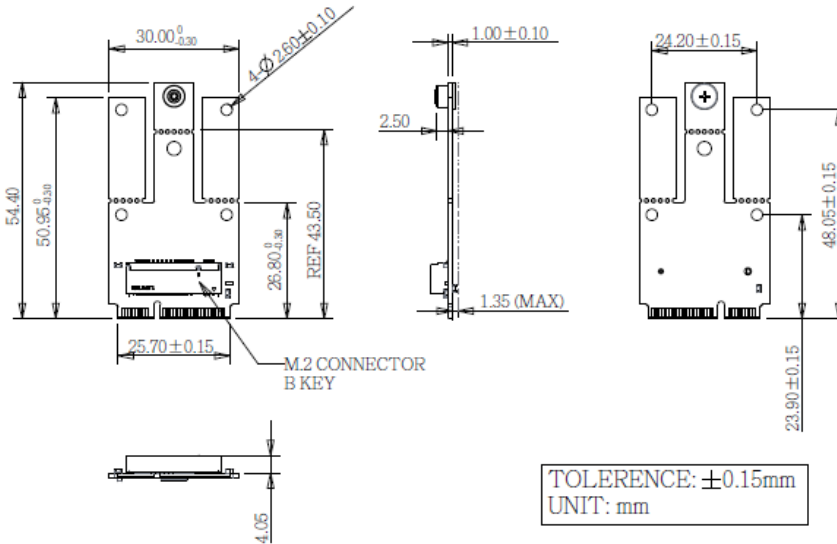

### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City 221,  
Taiwan

Tel: +886-2-7703-3000  
Email: sales@innodisk.com

### Branch Offices:

#### USA

[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421

#### Europe

[esusales@innodisk.com](mailto:esusales@innodisk.com)  
+31-040-3045-400

#### Japan

[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161

#### China

[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689

### Specifications

Form-Factor	mPCIe
Input I/F	PCI Express, USB 2.0, SATA III
Output I/F	PCI Express, USB 2.0, SATA III
Output Connector	M.2 B Key
Dimension (WxLxH)	30 x 54.4 x 6.4 mm
Temperature	Operation: W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

### [www.innodisk.com](http://www.innodisk.com)

© 2018 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

May 30, 2020

### Order information

**EMXX-0102-W1**  
mPCIe to M.2 B key Module