

## 15.6" Industrial Touch Panel PC with Rockchip RK3399 Processor

### Overview


The APC-9156 15.6" industrial panel computer features a full-plane capacitive multi-point touchscreen, modular design, fanless operation, and shockproof construction. It provides 4:3 and 16:9 aspect ratio options to meet different content display needs. The APC-9156 Android panel PC adopts a low-power processor and boasts a stable system architecture, ensuring exceptional performance in industrial environments. Additionally, the entire product series is crafted with an aluminum alloy front panel and a metal body, providing excellent heat dissipation and rust resistance.

### Features

- 15.6" LED-backlit LCD with capacitive touchscreen
- Rugged aluminum enclosure and fanless design
- Rockchip RK3399, ARM 2xCortex-A72+4xCortex-A53 1.8GHz processor
- 5x USB, 2x LAN, 1x VGA, 1x HDMI
- Supports Wi-Fi, 4G, and 5G
- Supports VESA 100 mount and panel mount



### I/O Interfaces

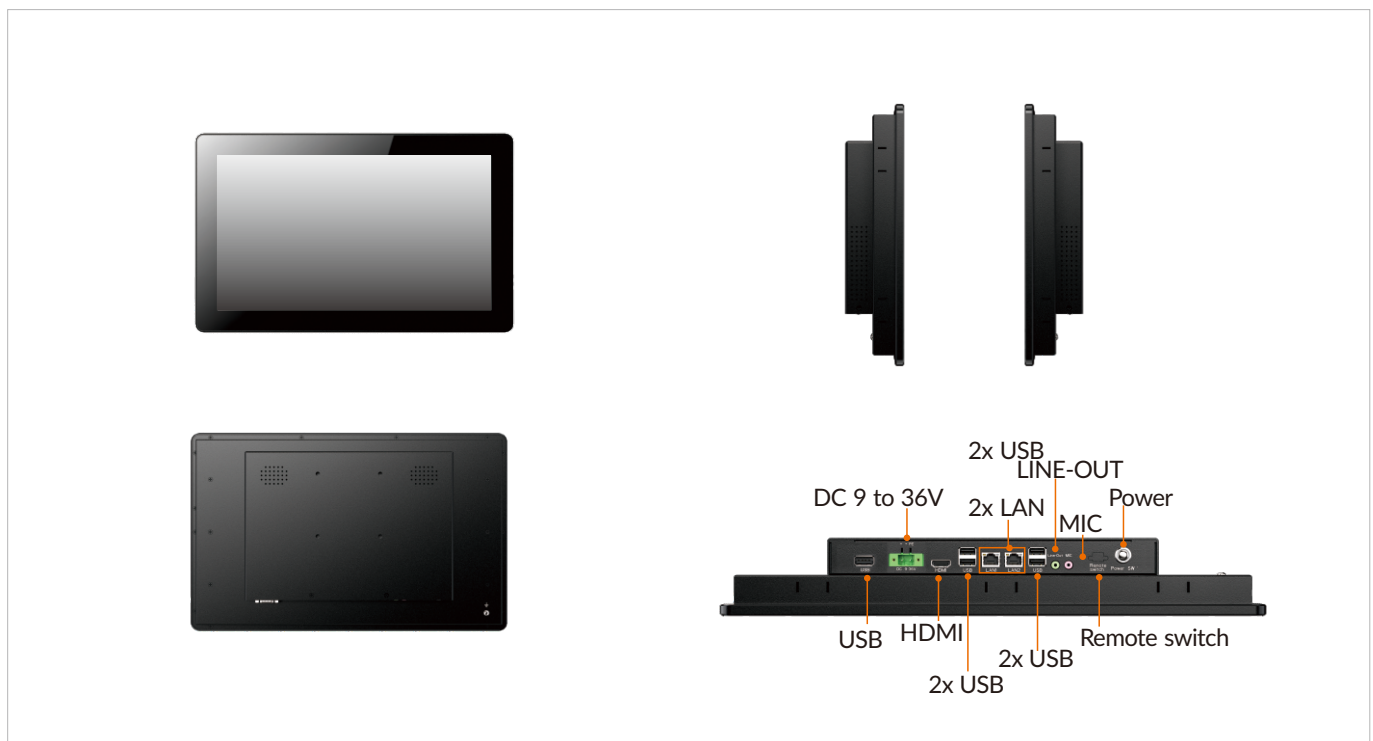

## Specifications

<b>Display</b>	
Size	15.6 inch
Touch Type	Projected capacitive multi touch
Transmittance	87%
Control Interface	USB
Surface Hardness	≥7H
Resolution	1920 x 1080
Luminance	250 nits
Contrast Ratio	1000: 1
View Angles	89 (left), 89 (right), 89 (up), 89 (down)
LED Lifetime	15,000 hrs
Color	16.7M
<b>System</b>	
CPU	Rockchip RK3399, ARM 2xCortex-A72+4xCortex-A53 1.8GHz Processor
GPU	Mali-T860 GPU MP4 GPU
Memory	DDR4 4GB (onboard)
Storage	EMMC 32G (onboard)
<b>I/O Ports</b>	
USB	4x USB 3.0 1x USB 2.0 (OTG)
Serial	1x COM (RS-232)
Ethernet	2x GbE LAN
Display	1x HDMI
SIM Card Slot	1x SIM slot for 4G or 5G
TF Card Slot	1x TF Card Slot
GPIO	1x GPIO (optional)
Antenna	2x SMA antenna holes
<b>Expansion Slot</b>	
M.2	1x M.2 3042 for 4G, 1x M.2 3052 for 5G
<b>Audio</b>	
Audio	Mic in, line out
Speaker	2Ω 5W speaker (optional)
<b>Power</b>	
Button	Yes
Remote Power On/Off	1x Remote switch connector
DC Input	9 to 36VDC
Power Connector	M12
Power Consumption	12W
Power Adaptor	AC-DC, 12V@5A, 60W
<b>Operating System</b>	
Linux	Ubuntu
Android	Android 10
<b>Mechanical</b>	
Dimensions (W x D x H)	399.4 x 249.4 x 57.3 mm (12.2 x 9.7 x 2.4 inches)
Weight (N.W.)	3.9 kg (8.6 lbs)
Mounting	Panel mount, wall mount bracket VESA 100
Material	Aluminum alloy panel, all-metal chassis

Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @ 40°C (104°F), non-condensing
Vibration	5-500Hz, 0.026 G <sup>2</sup> /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE, FCC
Packing List	
Packing	1x APC-9156 10x panel mounting buckles 1x warranty card

## Dimensions

