

Features

- 18.5" Industrial Compact Size Panel PC
- Intel N97 Processor
- Support 1 x DDR5 4800MHz SO-DIMM, Up to 32GB
- IP66 Compliant Aluminum Front Bezel
- Support Resistive touch screen and Projected Capacitive Multi-touch screen
- Support Auto-Dimming (for option)
- Support High Brightness LCD (for option)
- Fanless Design
- DC 9~36V Wide Range Power Input

Specifications

System	
CPU	Intel N97 Quad Core Processor, 3.60GHz, TDP is 12W
System Chipset	SoC
Memory	1 x DDR5 4800MHz SO-DIMM, up to 32GB
BIOS	AMI UEFI

I/O Port	
USB	2 x USB 3.2 Gen1 Type-A, 2 x USB 2.0 Type A 1 x DB9 Type RS-232/422/485 (COM1, BIOS selection, RS-232 is default)
Serial / Parallel	1 x DB9 Type RS-232/422/485 (COM2, BIOS selection, RS-232 is default) 1 x DB9 Type RS-232(COM3)
LAN	2 x RJ-45 Type Intel I226V/IT 2.5GbE LAN (PXE/WOL)
Power	1 x Terminal Block Type, DC 9~36V Power Input

Storage Space	
HDD/SSD	1 x M.2 M-Key slot for storage device (PCIe3.0 x1 or SATA, 2280)

Expansion	
Expansion slot	1 x M.2 E-Key slot (Support Wi-Fi + Bluetooth, 2230) 1 x M.2 B-Key slot with 1 x Nano-SIM slot (Support 4G/5G, 3042/3052)


Storage Space	
TPM	Onboard TPM2.0 SPI I/F TPM IC
Watchdog Timer	1~255 sec (system)
Wake on LAN	Support WOL

Display	Standard	High Brightness by SKU
Display Type	18.5" TFT-LCD	18.5" TFT-LCD
Max. Resolution	1920 x 1080	1920 x 1080
Max. Color	16.7M	16.7M
Luminance (cd/m ²)	350	1000
View Angle	178(H)/178(V)	178(H)/178(V)
Contrast	1000:1	1000:1
Backlight Lifetime	50,000 hrs	50,000 hrs

Touch Screen	
Type	Resistive Touch (for CR Model) Projected Capacitive Touch (for CP Model)
Interface	USB
Light Transmission(%)	Resistive Touch: 80% / Projected Capacitive Touch: 90%

Power	
Power Input	DC 9~36V
Power Consumption	ARCHMI-S-818CP/R: TBD

Dimensions

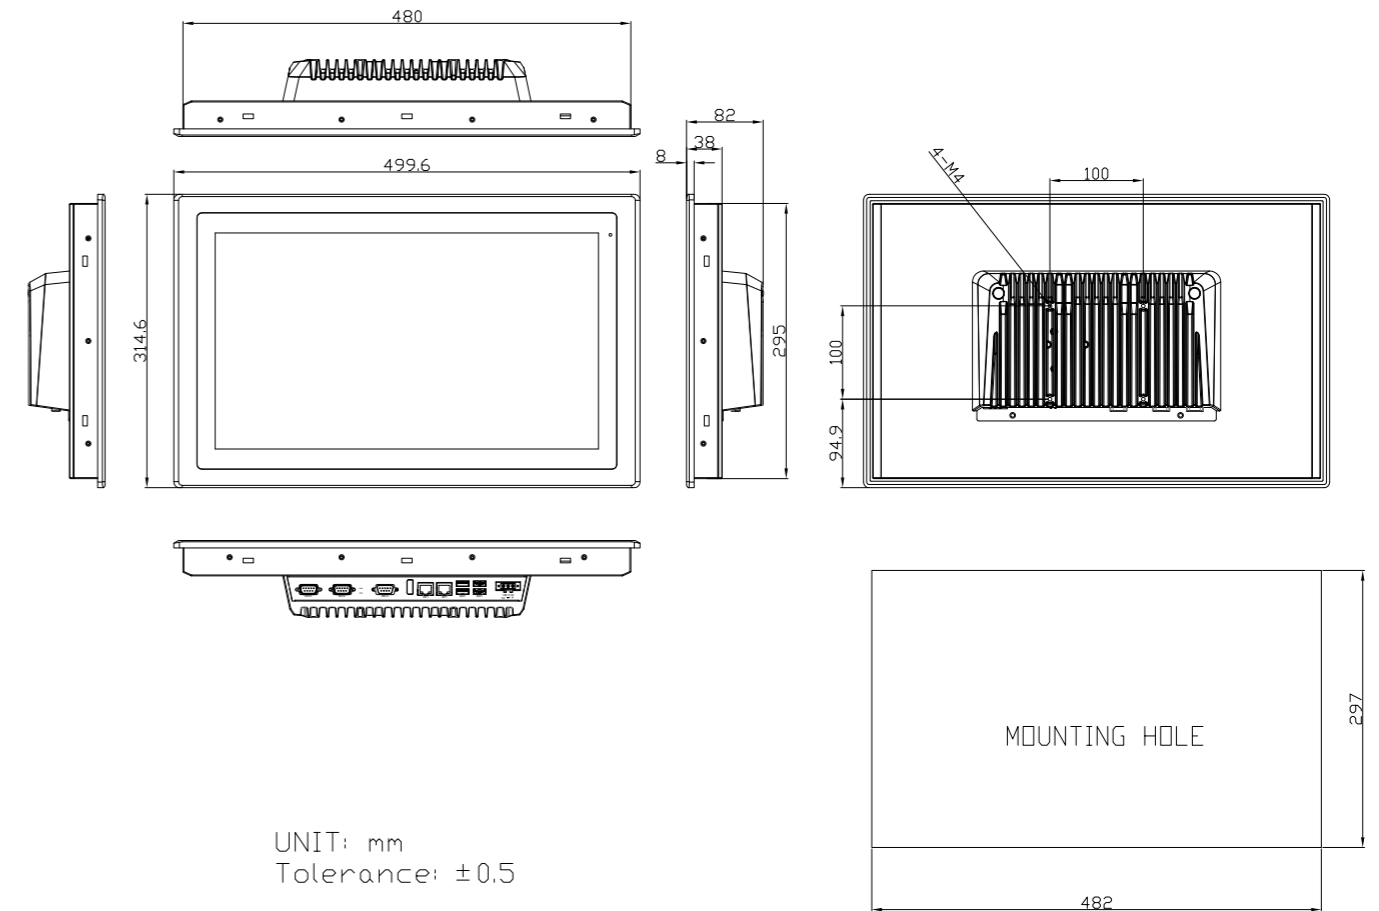

UNIT: mm
Tolerance: ±0.5

Mechanical	
Construction	Aluminum Die-casting Chassis
Mounting	Panel Mount, VESA 100 x 100
IP Rating	IP66 Compliant Front Bezel
Dimensions (WxHxD)	499.6 x 314.6 x 82 mm
Net Weight	6.85 kg

Environmental	
Operating Temperature	Standard: 0~50°C (default) / -20~60°C (optional) High Brightness: 0~50°C
Storage Temperature	-30~70°C
Humidity	10 to 95%@ 40°C, non-condensing
Certificate	CE/FCC Class A

Operating System Support	
Windows 10 IoT Enterprise 2021 LTSC	
Windows 11 (21H2) or later	
Linux 22.04 or later	

Ordering Information	
ARCHMI-S-818CP	18.5" FHD fanless HMI barebone with Intel N97 CPU, 1 x DDR5 slot, Projected Capacitive touch, 9~36V DC input with adapter, Aluminum chassis.
ARCHMI-S-818CR	18.5" FHD fanless HMI barebone with Intel N97 CPU, 1 x DDR5 slot, Resistive touch screen, 9~36V DC input with adapter, Aluminum chassis.
ARCHMI-S-818CPH	18.5" FHD High brightness fanless HMI barebone with Intel N97 CPU, 1 x DDR5 slot, Projected Capacitive touch, 9~36VDC input with adapter, Aluminum chassis.
ARCHMI-S-818CRH	18.5" FHD High brightness fanless HMI barebone with Intel N97 CPU, 1 x DDR5 slot, Resistive touch screen, 9~36V DC input with adapter, Aluminum chassis.

