EMX-PTLP

Onboard Intel® Core™ Ultra BGA processor (Series 3), Thin Mini ITX Motherboard supports TDP 25W

User's Manual

1st Ed – 29 September 2026

Copyright Notice

Copyright © 2026 Avalue Technology Inc., ALL RIGHTS RESERVED.

Part No: E2047EMPL00R

Document Amendment History

Revision	Date	By	Comment
1st	September 2026	Avalue	Initial Release

Declaration of Conformity



This device complies with part 15 FCC rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a class "a" digital device, pursuant to part 15 of the FCC rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CE statement

The product(s) described in this manual complies with all application European Union (CE) directives if it has a CE marking. For computer systems to remain CE compliant, only CE-compliant parts may be used. Maintaining CE compliance also requires proper cable and cabling techniques.

Notice

This guide is designed for experienced users to setup the system within the shortest time. For detailed information, please always refer to the electronic user's manual.

Copyright Notice

© 2026 by Avalue Technology Inc. All rights are reserved. No parts of this manual may be copied, modified, or reproduced in any form or by any means for commercial use without the prior written permission of Avalue Technology Inc. All information and specification provided in this manual are for reference only and remain subject to change without prior notice.

Acknowledgements

Intel and Pentium are trademarks of Intel Corporation.

Microsoft Windows is registered trademark of Microsoft Corp.

All other product names or trademarks are properties of their respective owners.

Disclaimer

This manual is intended to be used as a practical and informative guide only and is subject

to change without notice. It does not represent a commitment on the part of Avalue. This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

A Message to the Customer

Avalue Customer Services

Each and every Avalue's product is built to the most exacting specifications to ensure reliable performance in the harsh and demanding conditions typical of industrial environments. Whether your new Avalue device is destined for the laboratory or the factory floor, you can be assured that your product will provide the reliability and ease of operation for which the name Avalue has come to be known.

Your satisfaction is our primary concern. Here is a guide to Avalue's customer services. To ensure you get the full benefit of our services, please follow the instructions below carefully.

Technical Support and Assistance

1. Visit the Avalue website at https://www.avalue.com/ where you can find the latest information about the product.
2. Contact your distributor or our technical support team or sales representative for technical support if you need additional assistance. Please have following information ready before you call:

- Product name and serial number
- Description of your peripheral attachments
- Description of your software (operating system, version, application software, etc.)
- A complete description of the problem
- The exact wording of any error messages

To receive the latest version of the user's manual; please visit our Web site at:
www.avalue.com

Product Warranty (Returns & Warranties policy)

1. Purpose

Avalue establishes the following maintenance specifications and operation procedures for providing the best quality of service and shortened repair time to our customers.

2. Warranty

2.1 Warranty Period

Avalue endeavors to offer customers the most comprehensive post-sales services and protection; besides offering a 2-year warranty for standard Avalue products, an extended warranty service can also be provided based on additional request from the customer. Within the warranty period, customers are entitled to receive comprehensive and prompt repair and warranty.

Standard products manufactured by Avalue are offered a 2-year warranty, from the date of delivery from Avalue. For ODM/OEM products manufactured by Avalue or PCBA with conformal coating, will follow up the define warranty of the agreement, otherwise will be offered 1-year warranty for ODM/OEM products but non-warranty for PCBA with conformal coating. For outsourcing parts kit by Avalue (ex: Motherboard, LCD touch panel, CPU, RAM, HDD) are offered a 6-month warranty, and Mobile/Tablet PC battery are offered a warranty of the half year, from the date of delivery by Avalue. Products before the mass production stage, i.e. engineering samples are not applied in this warranty or service policy. For extended warranty and cross-territory services, product defects resulting from design, production process or material are covered by the pre-set warranty period after the date of delivery from Avalue. For non-Avalue products, the product warranty and repair time shall be based on the service standards provided by the original manufacturer; in principle Avalue will provide these products a warranty service for no more than one year.

2.2 Maintenance services within the warranty period

In the case of Avalue product DOA (Defect-on-Arrival) when the customer finds any defect within 1 month after the delivery, Avalue will replace it with a new product in a soonest way. Except for custom products, once the customer is approved of a Cross-Shipment Agreement, which allows for delivery a new product to the customer before receiving the defective one, Avalue will immediately proceed with new product replacement for the said DOA case. On validation of the confirmed defect, Avalue is entitled to reserve the right whether to provide a new product for replacement. For the returned defective new product, it is necessary to verify that there shall be no bruise, alteration, scratch or marking to the appearance, and that none of the delivered accessories missing; otherwise, the customer will be requested to pay a processing fee. On the other hand, if the new product defect is resulting from incorrect configuration or erroneous use by the user instead of any problem of the hardware itself, the customer will also be requested to pay for relevant handling fees.

As for other conditions, Avalue will handle defects by way of repair. The customer will be requested to send the defective product to an Avalue authorized service center, and Avalue will return the repaired product back to the customer as soon as possible.

2.3 Ruling of an out-of-warranty defect

The following situations are not included in the warranty:

- The warranty period has expired.
- Product has been altered or its label of the serial number has been torn off.
- Product functionality issues resulting from improper use by the user, unauthorized dismantle or alteration, unfit operation environment, improper maintenance, accident or other causes. Avalue reserves the right for the ruling of the aforementioned situations.
- Product damage resulting from lightning, flood, earthquake or other calamities.
- The warranty rules of non-Avalue products and accessories shall be in accordance with standards set up by the original manufacturer. These products and accessories include RAM, HDD, FDD, CD-ROM, CPU, FAN, etc.
- Product upgrade request or test request submitted by the customer after expiration of the warranty.
- PCBA with conformal coating.
- Avalue semi-product and outsourced products without Avalue serial number.
- Products before the mass production stage, i.e. engineering samples.

3. Procedure for sending for repair

3.1 Attain a RMA number

A customer's rejected product returned for repair shall have a RMA (Return Merchandise Authorization) number. Without a RMA number, Avalue will not provide any repair service for the rejected product, and the product will be returned to the customer at customer's cost. Avalue will not issue any notice for the return of the product.

Each returned product for repair shall have a RMA number, which is simply the authorization of the return for repair; it is not a guarantee that the returned goods can be repaired or replaced. For applying for a RMA number, the customer may enter the eRMA webpage of Avalue https://www.avalue.com/en/member and log-in with an account number and a password authorized by Avalue. The system will then automatically issue a RMA number.

When applying for the RMA number, it is essential to fill in basic information of the customer and the product, together with detailed description of the problem encountered. If possible, avoid using ambiguous words such as "does not work" or "problematic". Without a substantial description of the problem, it is hard to start the repair and will cause prolonged repair time. Lacking detailed statement of fault steps also makes the problem hard to be identified, sometimes resulting in second-time repairs.

In case the customer can't define the cause of problem, please contact Avalue application engineers. Sometimes when the problem can be resolved even before the customer sends back the product.

On the other hand, if the customer only returns the key parts to Avalue for repair, it is necessary that the serial number of the entire unit is given in the "Problem Description" field, so that warranty period can be ruled accordingly; or Avalue will handle the case as an Out-of- warranty case.

3.2 Return of faulty product for repair

It is recommended that the customer not to return the accessories (manual, connection cables, etc.) with the products for repair, devices such as CPU, DRAM, CF memory card, etc., shall also be removed from the faulty goods before return for repair. If these devices are relevant to described repair problems and necessary to be returned with the goods; please clearly indicate the items included in the eRMA application form. Avalue shall not be responsible for any item that is not itemized. Moreover, make sure the problem(s) are detailed in the "Problem Description" field.

In the list of delivery, the customer may fill-in a value which is lower than the actual value, to prevent customs levying a higher tax over the excessive value of the return goods. The customer shall be held responsible for extra fees caused by this. We strongly recommend that "Invoice for customs purpose only with no commercial value" be indicated on the delivery note. Also for the purpose of expedited handling, please printout the RMA number and put it in the carton, also indicate the number outside of the carton, with the recipient addressing to Avalue RMA Department.

When returning the defective product, please use an anti-static bag or ESD material to pack it properly. In case of improper packing resulting in damages in the transportation process, Avalue reserves the right to reject the un-repaired faulty good at the customer's costs. Furthermore, it is suggested that the faulty goods shall be sent via a door-to-door courier service. The customer shall be held responsible for any customs clearance fee or extra expenses if Air-Cargo is used for the delivery.

In case of a DOA situation of a new product, Avalue will be responsible for the product and the freight. If the faulty goods are within the warranty period, the sender will take responsibility for the freight. For an out-of-warranty case, the customer shall be responsible for the freight of both trips.

3.3 Maintenance Charge

Avalue will charge a moderate repair fee for the following conditions:

- The warranty period has expired.
- Product has been altered or its label of the serial number has been torn off.
- Product functionality issues resulting from improper use by the user, unauthorized dismantle or alteration, unfit operation environment, improper maintenance, accident

or other causes. Avalue reserves the right for the ruling of the aforementioned situations.

- Product damage resulting from lightning, flood, earthquake or other calamities.
- The warranty rules for non-Avalue products and accessories shall be in accordance with standards set up by the original supplier. These products and accessories include RAM, HDD, FDD, CD-ROM, CPU, FAN, etc.
- Product upgrade request or test request submitted by the customer after expiry of the warranty.
- PCBA with conformal coating.
- Avalue semi-product and outsourced products without Avalue serial number
- Products before the mass production stage, i.e. engineering samples.
- In case the products received are examined as NPF (No Problem Found) within the warranty period, the customer shall be responsible for the freight of both trips.
- Please contact your local distributor to examine in advance to prevent unnecessary freight cost.

For system failure of out-of-warranty products, Avalue will provide a quotation prior to repair service. When the customer applies for the cost, please refer to the Quotation number. In case the customer does not return the DOA product that has already been replaced by a new one, or the customer does not sign back the quotation of the out-of-warranty maintenance, Avalue reserves the right of whether or not to provide the repair service. In case the customer does not reply in 3 months, Avalue shall directly scrap or return the product back to customer at customer's cost without further notice to the customer.

3.4 Maintenance service of phased-out products

For servicing phased-out products, Avalue provides an extended period, starting the date of phase-out, as a guaranteed maintenance period of such products, for continuance of the maintenance service to meet customer's requirements. In case of unexpected factors causing Avalue to be unable to repair/replace a warranted but phased-out product, Avalue will, depending on the availability, upgrade the product (free of charge with continued warranty period as of the original product), or, give partial refund (based on the length of the remaining warranty period) to solve this kind of problem.

3.5 Maintenance Report

On completion of repair of a defective product, a Maintenance Report indicating the maintenance result and part(s) replaced (if any) will be sent to the customer together with the product. If the customer demands an additional maintenance analysis report, a service fee of various level will be charged depending on the warranty status. In case the analysis result shows that the defect attributes to Avalue's faulty design or process, the analysis fee will be exempted.

4. Service Products

Avalue provides service products to manage with different customer needs. Should you have any need, please consult to Avalue Sales Department.

Defect Analysis Report (DAR)

Avalue provides DAR (Defect Analysis Report) services aiming to elevating customer satisfaction. A DAR includes defect cause identification/verification/suggestion and improvement precautions, with instructions on correct usage for the avoidance of any reoccurrence.

Upgrade Service

Avalue is capable to provide system upgrade service for customization requirements. This upgrade service is applicable for main parts, such as CPU, memory, HDD, SSD, storage devices; also replacements motherboards of systems. Please contact Avalue sales for details to evaluate the possibility of system upgrade service and obtain information of lead time and price.

Safety Instructions

Safety Precautions

Before installing and using this device, please note the following precautions.

1. Read these safety instructions carefully.
2. Keep this User's Manual for future reference.
3. Disconnected this equipment from any AC outlet before cleaning.
4. For plug-in equipment, the power outlet socket must be located near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall may cause damage.
7. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
8. Use a power cord that has been approved for using with the product and that it matches the voltage and current marked on the product's electrical range label. The voltage and current rating of the cord must be greater than the voltage and current rating marked on the product.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to

avoid damage by transient overvoltage.
12. Never pour any liquid into an opening. This may cause fire or electrical shock.
13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel. If one of the following situations arises, get the equipment checked by service personnel:

- The power cord or plug is damaged.
- Liquid has penetrated into the equipment.
- The equipment has been exposed to moisture.
- The equipment does not work well, or you cannot get it work according to the user's manual.
- The equipment has been dropped and damaged.
- The equipment has obvious signs of breakage.

14. CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.
15. Equipment intended only for use in a RESTRICTED ACCESS AREA.

Explanation of Graphical Symbols

	Warning	A WARNING statement provides important information about a potentially hazardous situation which, if not avoided, could result in death or serious injury.
	Caution	A CAUTION statement provides important information about a potentially hazardous situation which, if not avoided, may result in minor or moderate injury to the user or patient or in damage to the equipment or other property.
	Note	A NOTE provides additional information intended to avoid inconveniences during operation.
		Direct current.
		Alternating current
		Stand-by, Power on
		FCC Certification
		CE Certification
		Follow the national requirements for disposal of equipment.
		Stacking layer limit
		This side up

		Fragile Packaging
		Beware of water damage, moisture-proof
		Carton recyclable
		Handle with care
		Follow operating instructions of consult instructions for use.
		**WARNING** • **INGESTION HAZARD**: This product contains a button cell or coin battery. • **DEATH** or serious injury can occur if ingested. • A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**. • **KEEP** new and used batteries **OUT OF REACH of CHILDREN**. **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.

Disposing of your old product

WARNING:
There is danger of explosion if the battery is mishandled or incorretly replaced. Replace only with the same type of battery. Do not disassemble it or attempt to recharge it outside the system. Do not crush, puncture, dispose of in fire, short the external contacts, or expose to water or ther liquids. Dispose of the battery in accordance with local regulations and instructions from your service provider.

CAUTION:
- Lithium Battery Caution: Danger of explosion if battery is incorrectly replaced. Replace only with same or equivalent type. Dispose batteries according to manufacturer's instructions.
- Disposal of a BATTERY into fire or a hot oven, or mechanically crushing or cutting of a BATTERY, that can result in an EXPLOSION
- Leaving a BATTERY in an extremely high temperature surrounding environment that can result in an EXPLOSION or the leakage of flammable liquid or gas.
- A BATTERY subjected to extremely low air pressure that may result in an EXPLOSION or the leakage of flammable liquid or gas.

Mise en garde!
AVERTISSEMENT : Il existe un risque d'explosion si la batterie est mal manipulée ou remplacée de manière incorrecte. Remplacez uniquement par le même type de batterie. Ne le démontez pas et ne tentez pas de le recharger en dehors du système. Ne pas écraser, percer, jeter au feu, court-circuiter les contacts externes ou exposer à l'eau ou à d'autres liquides. Jetez la batterie conformément aux réglementations locales et aux instructions de votre fournisseur de services.

MISE EN GARDE:
- Pile au lithium Attention : Danger d'explosion si la pile n'est pas remplacée correctement. Remplacer uniquement par un type identique ou équivalent. Jetez les piles conformément aux instructions du fabricant.
- L'élimination d'une BATTERIE dans le feu ou dans un four chaud, ou l'écrasement ou le découpage mécanique d'une BATTERIE, pouvant entraîner une EXPLOSION
- Laisser une BATTERIE dans un environnement à température extrêmement élevée pouvant entraîner une EXPLOSION ou une fuite de liquide ou de gaz inflammable.
- UNE BATTERIE soumise à une pression d'air extrêmement basse pouvant entraîner une EXPLOSION ou une fuite de liquide ou de gaz inflammable.

Content

1. Getting Started 17
1.1 Safety Precautions 17
1.2 Packing List 17
1.3 Manual Objectives 18
1.4 System Specifications 19
1.5 Architecture Overview—Block Diagram 24
2. Hardware Configuration 25
2.1 Product Overview 26
2.2 Jumper and Connector List 27
2.3 Setting Jumpers & Connectors 29
2.3.1 M.2 Key B power selector (JM2B_PWR1) 29
2.3.2 AT/ATX Power Mode selector (JAT1) 29
2.3.3 Clear CMOS (JRTC1) 30
2.3.4 Serial port 1/2 pin9 signal select (JCOM1_RI1/JCOM2_RI1) 30
2.3.5 Serial Port 1 RS232 Mode connector (JCOM1) 31
2.3.6 Serial Port 2 RS232 Mode connector (JCOM2) 31
2.3.7 Serial Port 3 RS232 Mode connector (JCOM3) 32
2.3.8 Serial Port 4 RS232 Mode connector (JCOM4) 32
2.3.9 Serial Port 5 RS232 Mode connector (JCOM5) 33
2.3.10 General purpose I/O connector (JDIO1) 33
2.3.11 Speaker connector (SPK1) 34
2.3.12 Front Panel connector (JFP1) 34
2.3.13 LAN activity indicator LED connector (JLED1) 35
2.3.14 Serial Port 1 RS485/422 Mode connector (JRS485-1) 35
2.3.15 Serial Port 2 RS485/422 Mode connector (JRS485-2) 36
2.3.16 USB 2.0 connector (JUSB1) 36
2.3.17 USB 2.0 connector (JUSB2) 37
2.3.18 RTC Battery connector (JBAT1) 37
2.3.19 eSPI debug connector (JESPI1) 38
2.3.20 CPU fan connector (CPU_FAN1) 38
2.3.21 System fan connector (SYS_FAN1) 39
2.3.22 Front Audio connector (JAUDIO1) 39
2.3.23 LVDS/eDP connector (EDP_LVDS1) 40
2.3.24 LVDS backlight connector (JBKL1) 41
3. Drivers Installation 42
3.1 Install Chipset Driver 43
3.2 Install Graphics Driver 45

3.3 Install LAN Driver 46
3.4 Install ME Driver 47
3.5 Install Serial IO Driver 48
3.6 Install ISSEI Driver 49
3.7 Install ISST Driver 50
3.8 Install Audio Driver 51
3.9 Install NPU Driver 52
4.BIOS Setup 53
4.1 Introduction 54
4.2 Starting Setup 54
4.3 Using Setup 55
4.4 Getting Help 56
4.5 In Case of Problems 56
4.6 BIOS setup 57
4.6.1 Main Menu 57
4.6.1.1 System Language 57
4.6.1.2 System Date 58
4.6.1.3 System Time 58
4.6.2 Advanced Menu 58
4.6.2.1 CPU Configuration 59
4.6.2.1.1 Efficient-core Information 60
4.6.2.1.2 Efficient-core Information 60
4.6.2.2 Power & Performance 61
4.6.2.2.1 CPU - Power Management Control 61
4.6.2.3 System Agent (SA) Configuration 62
4.6.2.3.1 Memory Configuration 62
4.6.2.3.2 Graphics Configuration 63
4.6.2.3.3 VMD setup menu 63
4.6.2.3.4 VT-d setup menu 64
4.6.2.4 PCIE Configuration 64
4.6.2.4.1 PCIE Configuration 65
4.6.2.4.1.1 PCI Express Root Port PXPA1(LAN1-I210) 65
4.6.2.4.1.2 PCI Express Root Port PXPA2 (LAN2-I226) 66
4.6.2.4.1.3 PCI Express Root Port PXPA3 (M.2 KeyB) 67
4.6.2.4.1.4 PCI Express Root Port PXPA4 (M.2 KeyE) 68
4.6.2.4.1.5 PCI Express Root Port PXPB1 (M.2 KeyM2) 69
4.6.2.4.1.6 PCI Express Root Port PXPC1 (M.2 KeyM1) 70
4.6.2.4.1.7 PCI Express Root Port PXPD (PCIE X8) 71
4.6.2.5 PCH-IO Configuration 72
4.6.2.5.1 HD Audio Configuration 72

4.6.2.6 PCH-FW Configuration 73
4.6.2.6.1 Me FW Image Re-Flash 73
4.6.2.7 Trusted Computing 74
4.6.2.8 ACPI Settings 74
4.6.2.9 Board & Panel Configuration 75
4.6.2.10 SHOW DMI INFO 77
4.6.2.11 Super IO Configuration 77
4.6.2.11.1 Serial Port 1 Configuration 78
4.6.2.11.2 Serial Port 2 Configuration 78
4.6.2.11.3 Serial Port 3 Configuration 79
4.6.2.11.4 Serial Port 4 Configuration 80
4.6.2.11.5 Serial Port 5 Configuration 80
4.6.2.11.6 Serial Port 6 Configuration 81
4.6.2.12 EC 5792 HW monitor 81
4.6.2.13 S5 RTC Wake Settings 82
4.6.2.14 Serial Port Console Redirection 82
4.6.2.15 Connectivity Configuration 83
4.6.2.16 USB Configuration 84
4.6.2.17 Network Stack Configuration 85
4.6.2.18 NVMe Configuration 85
4.6.3 Security 86
4.6.4 Boot 88
4.6.5 Save and Exit 88
4.6.5.1 *Save Changes and Reset* 88
4.6.5.2 *Discard Changes and Reset* 88
4.6.5.3 *Restore Defaults* 89
4.6.5.4 *Launch EFI Shell from filesystem device* 89
4.6.6 MEBx 89
5. Mechanical Drawing 90

1. Getting Started

1.1 Safety Precautions

Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

1.2 Packing List

Before installation, please ensure all the items listed in the following table are included in the package.

Item	Description	Q'ty
1	EMX-PTLP Mainboard	1
2	IO Shield	1



If any of the above items is damaged or missing, contact your retailer.

1.3 Manual Objectives

This manual describes in details Avalue Technology EMX-PTLP Single Board.

We have tried to include as much information as possible but we have not duplicated information that is provided in the standard IBM Technical References, unless it proved to be necessary to aid in the understanding of this board.

We strongly recommend that you study this manual carefully before attempting to set up EMX-PTLP or change the standard configurations. Whilst all the necessary information is available in this manual we would recommend that unless you are confident, you contact your supplier for guidance.

Please be aware that it is possible to create configurations within the CMOS RAM that make booting impossible. If this should happen, clear the CMOS settings, (see the description of the Jumper Settings for details).

If you have any suggestions or find any errors regarding this manual and want to inform us of these, please contact our Customer Service department with the relevant details.

1.4 System Specifications

System	
CPU	Onboard Intel® Core™ Ultra BGA processor (Series 3) (TDP: 25W) (Codenamed: Panther Lake-H)
BIOS	AMI uEFI BIOS, 256Mbit SPI Flash ROM
I/O Chip	uBMC IT5792(IPMI) or equivalent
System Memory	H12Xe/H404: Two 262-pin DDR5 SoDIMM ~5600MHz or CSoDIMM ~6400MHz upto 64GB Max H484: Two 262-pin DDR5 SoDIMM ~5600MHz or CSoDIMM ~7200MHz upto 64GB Max (non ECC only)
Watchdog Timer	H/W Reset, 1sec. – 65535sec./min.1sec. or 1min. step
H/W Status Monitor	CPU temperature monitoring Voltage monitoring CPU fan speed control
RAID	Intel® VMD RAID 0/1 **supported by identical interface (PCIe) PCIe interface: 2 x M.2 Key M
TPM	Onboard NuvoTon NPCT760AABYX (7.2.3.1) support SPI TPM 2.0
iAMT	Yes (for i226LM sku) * iAMT function is disabled in ErP mode (ErP Function set to Off mode w/o WOL).
Expansion Slot	
M.2	● 1 x M.2 Key-B 2242/3042/3052 with USB3.2 Gen2 x1 (from USB Hub IC), PCIe x1 Signal, with 1 x SIM card slot (INT_SIM1) or 1 x FPC SIM (J_N_SIM1) for LTE/IO Cards support WWAN+GNSS or PCIe x1 SSD, and USB2.0. * Does not support I^2S and PCM functions * Only supports one SIM card (co-lay 1 x 10pin FPC connector for uSIM card adapter) * 1 x 1 x 3 pin, pitch 2.00mm connector for M.2 module card 3.3V and 3.8V selection (JM2B_PWR1) (Jumper default: 2-3 for +3.3V) ● 1 x M.2 Key E 2230 support Wi-Fi module and CNVi (1 x PCIe x1 & USB 2.0 Signal) ● 1 x M.2 Key M 2280 slot (PCIe x4 Gen5) for storage NVMe SSD (Top PCBA) ● 1 x M.2 Key M 2280 slot (PCIe x4 Gen4) for storage NVMe SSD (Bottom PCBA)
PCIe	1 x PCI-e x8 Gen5 (H484 4Xe only)

Storage	
M.2	1 x M.2 Key M 2280 slot (PCIe x4 Gen5) for storage NVMe SSD (M2KM1) (Top PCBA) 1 x M.2 Key M 2280 slot (PCIe x4 Gen4) for storage NVMe SSD (M2KM2) (Bottom PCBA)
Edge I/O	
LAN	1 x Intel® I226-LM 2.5 Gigabit Ethernet Controller (LAN2) 1 x Intel® i210-AT Ethernet Controller (LAN1)
USB	● 2 x USB4 Type C 5V@3A (USBC1,USBC2), no PCIe signal ● 4 x USB3.2 Gen2 x1 on rear I/O (3 from USB Hub IC), +5VSB/0.9A (USB1 for dual port, USB2 & USB3 on top of Type C)
DP	3 x DP2.1 UHBR20 (1 from DP connector, 2 from Type C)
HDMI	1 x HDMI2.1
DC Input	Screw type DC in (10A) connector (co-lay Phoenix connector)
Onboard I/O	
COM	● COM 1~2: COM 1~2 support RS232/422/485 connector, and RS422/485 by BIOS setting. 2 x 2 x 5 pin, pitch 2.00mm pin header for support RS-232 connector (JCOM1,JCOM2) ,with RI/+5V/+12V by jumper (JCOM1_RI1, JCOM2_RI2) 2 x 2 x 3 pin, pitch 2.00mm pin header for COM1/ COM2: support RS422/485 connector (JRS485_1,JRS485_2,), Pin 5 with +5V Supported. ● COM3~5: 3 x 2 x 5 pin, pitch 2.00mm pin header for support RS-232 connector (JCOM3,JCOM4,JCOM5) Note: Due to hardware circuit design (shared SYS_WAKE# signal among COM Ring, LAN2, M.2 Key E, and PCIe x8), if you disable this option, Wi-Fi Wake on LAN (WOL) and other related wake-up functions from S3/S4 will also be disabled.
USB	1 x 2 x 5 pin, pitch 2.54mm connector for 2 USB 2.0 (JUSB1, blue color connector) 1 x 1 x 5 pin, pitch 2.54mm connector for 1 USB 2.0 (JUSB2, black color connector) +5VSB/0.5A (each port)
GPIO	1 x 2 x 10 pin, pitch 2.00mm pin header for 16-bit GPIO, +3.3S level SMBUS (JDIO1) (Max. 1A output)
CPU/System FAN	1 x 1 x 4 pin, pitch 2.54mm CPU fan connector with smart fan function supported (CPU_FAN1)

	1 x 1 x 4 pin, pitch 2.54mm System fan connector with smart fan function supported (SYS_FAN1)
Buzzer	Onboard BUZZER 5V 85dB DIP (BZ1)
Front Panel	1 x 2 x 5 pin, pitch 2.54mm pin header for Front panel (JFP1, white color connector)
RTC Battery	1 x 1 x 2 pin, pitch 1.25mm Wafer vertical type connector (JBAT1) for CR2450 (JBAT1_1)
AT/ATX Selector	1 x 1 x 3 pin, pitch 2.00mm pin header for AT/ATX jumper (JAT1) Jumper (1-2) default for ATX power mode
Clear CMOS	1 x 1 x 3 pin, pitch 2.00mm pin header for CMOS clear (JRTC1)
LVDS	1 x 2 x 20 pin, pitch 1.25mm Wafer connector for LVDS or eDP (EDP_LVDS1)
LCD Backlight Brightness	See below LCD Inverter.
LCD Inverter	1 x 1 x 5 pin, pitch 2.00mm Wafer connector for LCD inverter backlight brightness connector (5V/12V) (JBKL1) (+5V/+12V, 1A)
BIOS SPI	1 x 1 x 10 pin, pitch 1.00mm pin header for BIOS SPI & EC Internal flash (JBIOS1)
eSPI	1 x 2 x 6 pin, pitch 2.00mm connector for eSPI debug (JESPI1)
EC Debug	Combined with BIOS SPI.
Audio	1 x 2 x 6 Pin, pitch 2.54mm for MIC-in, Line-out, Line-in (JAUDIO1) (black color pin-header for MIT)
DC-Input	DC in +12V~24V (screw type) (co-lay Phoenix connector) ● DC-JACK: Max current: 10A (+12V~+24V) ● Terminal: Max current: 15A (+12V~+24V)
Amp Connector	1 x 1 x 4 pin, pitch 2.00mm wafer connector for 8Ω 2W x 2 Speaker (SPK1) Audio Amplifier Output: Up to 4Vrms / 2W (at 36dB Gain) Note: BIOS Default Gain is set to 20dB. To achieve the full 4Vrms / 2W output, please adjust the gain to 36dB in Expert Mode.
Other	1 x 2 x 5 pin, pitch 2.00mm pin header for LAN Activity Indicator LED, Key E WLAN LED, Key E BT LED (JLED1)
Display	
Graphic Chipset	Intel® Xe LPG+ Graphics
Spec. & Resolution	● 1 x HDMI 2.1 Max: 7680 x 4320@60Hz ● 1 x DP1.4a: Max: 7680 x 4320@30Hz (DQV actual test result) ● 2 x USB Type C supports 3840 x 2160@60Hz based on actual test. (**DP1.4a: 4096 x 2160@60Hz) (DQV actual test result)


<table>
<tr><td></td><td>● LVDS: 1920 x 1080 Dual channel 18/24-bits LVDS (Chrontel CH7513B eDP to LVDS) 7513B Default: LVDS.
Or eDP 1.4: 1920 x 1080 60Hz (2 Lanes)</td></tr>
<tr><td>Multiple Display</td><td>Quadruple Independent Display: 1 x HDMI, 3 x DP, 1 x LVDS or eDP</td></tr>
<tr><td>Audio</td><td></td></tr>
<tr><td>Audio Codec</td><td>Realtek ALC888S audio codec</td></tr>
<tr><td>Amplifier</td><td>TI TPA3113D2PWP Stereo Class-D audio Amplifier</td></tr>
<tr><td>Ethernet</td><td></td></tr>
<tr><td>LAN Chipset</td><td>● 1 x Intel® I226-LM 2.5 Gigabit Ethernet Controller (LAN2)
● 1 x Intel® i210-AT Ethernet Controller (LAN1)
(TSN capability is supported on LAN2 only, subject to OS support/Linux)</td></tr>
<tr><td>LAN Spec.</td><td>10/100/1000 Base-Tx GbE compatible & 2.5 Gigabit Ethernet</td></tr>
<tr><td>LED Indicator</td><td>
<table>
<tr><th colspan="4">Max. 1G LAN Port</th></tr>
<tr><th colspan="2">ACT/LINK</th><th colspan="2">SPEED</th></tr>
<tr><th>LED</th><th>Definition</th><th>LED</th><th>Definition</th></tr>
<tr><td>Light Off</td><td>No Link</td><td>Solid Orange</td><td>1G</td></tr>
<tr><td>Solid Yellow</td><td>Connection</td><td>Solid Green</td><td>100M</td></tr>
<tr><td>Yellow Flashing</td><td>Activity</td><td>Light Off</td><td>10M</td></tr>
<tr><th colspan="4">Max. 2.5G LAN Port</th></tr>
<tr><th colspan="2">ACT/LINK</th><th colspan="2">SPEED</th></tr>
<tr><th>LED</th><th>Definition</th><th>LED</th><th>Definition</th></tr>
<tr><td>Light Off</td><td>No Link</td><td>Solid Orange</td><td>1G</td></tr>
<tr><td>Solid Yellow</td><td>Connection</td><td>Solid Green</td><td>100M</td></tr>
<tr><td>Yellow Flashing</td><td>Activity</td><td>Light Off</td><td>10M</td></tr>
</table>
</td></tr>
<tr><td>Mechanical & Environmental</td><td></td></tr>
<tr><td>Power Requirement</td><td>DC in +12V ~ +24V</td></tr>
<tr><td>ACPI</td><td>Single power ATX Support S0, S4, S5
ACPI 5.0 Compliant
*Note: S3 Resume function is temporarily not supported due to platform limitation pending vendor fix.</td></tr>
<tr><td>Power Mode</td><td>AT / ATX mode Switchable Through Jumper</td></tr>
<tr><td>Operating Temp.</td><td>Intel@ Commercial Temperature CPU SKU support: 0~55°C
**w/HDD/SSD, ambient with 0.5 m/s Air flow</td></tr>
<tr><td>Storage Temp.</td><td>-40~ +75°C</td></tr>
<tr><td>Operating Humidity</td><td>40°C @ 95% Relative Humidity, Non-condensing</td></tr>
<tr><td>Size (L x W)</td><td>6.7" x 6.7" (170mm x 170mm)</td></tr>
</table>

Weight	273g (shipping w/o cooler)
Vibration Test	Package Vibration Test Reference IEC60068-2-64 Testing procedures Test Fh: Vibration broadband random Test 1. PSD: 0.026G²/Hz, 2.16 Grms 2. Non-operation mode 3. Test Frequency: 5-500Hz 4. Test Axis: X,Y and Z axis 5. 30 min. per each axis Random Vibration Operation Reference IEC60068-2-64 Testing procedures Test Fh : Vibration broadband random Test 1. PSD: 0.00454G²/Hz, 1.5 Grms 2. Operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 minutes per each axis 6. Test program OS+ PassMark Burn in test 10.1 Random Vibration Non Operation Reference IEC60068-2-64 Testing procedures Test Fh : Vibration broadband random Test 1. PSD: 0.01818G²/Hz, 3.0 Grms 2. Non Operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 minutes per each axis
Drop Test	Packing Drop Reference ISTA 2A, Method : IEC-60068-2-32 Test: Ed Drop Test 1 One corner , three edges, six faces 2 ISTA 2A, IEC-60068-2-32 Test:Ed
OS Information	Win11 64bit Linux

Note: Specifications are subject to change without notice.


1.5 Architecture Overview—Block Diagram

The following block diagram shows the architecture and main components of EMX-PTLP.

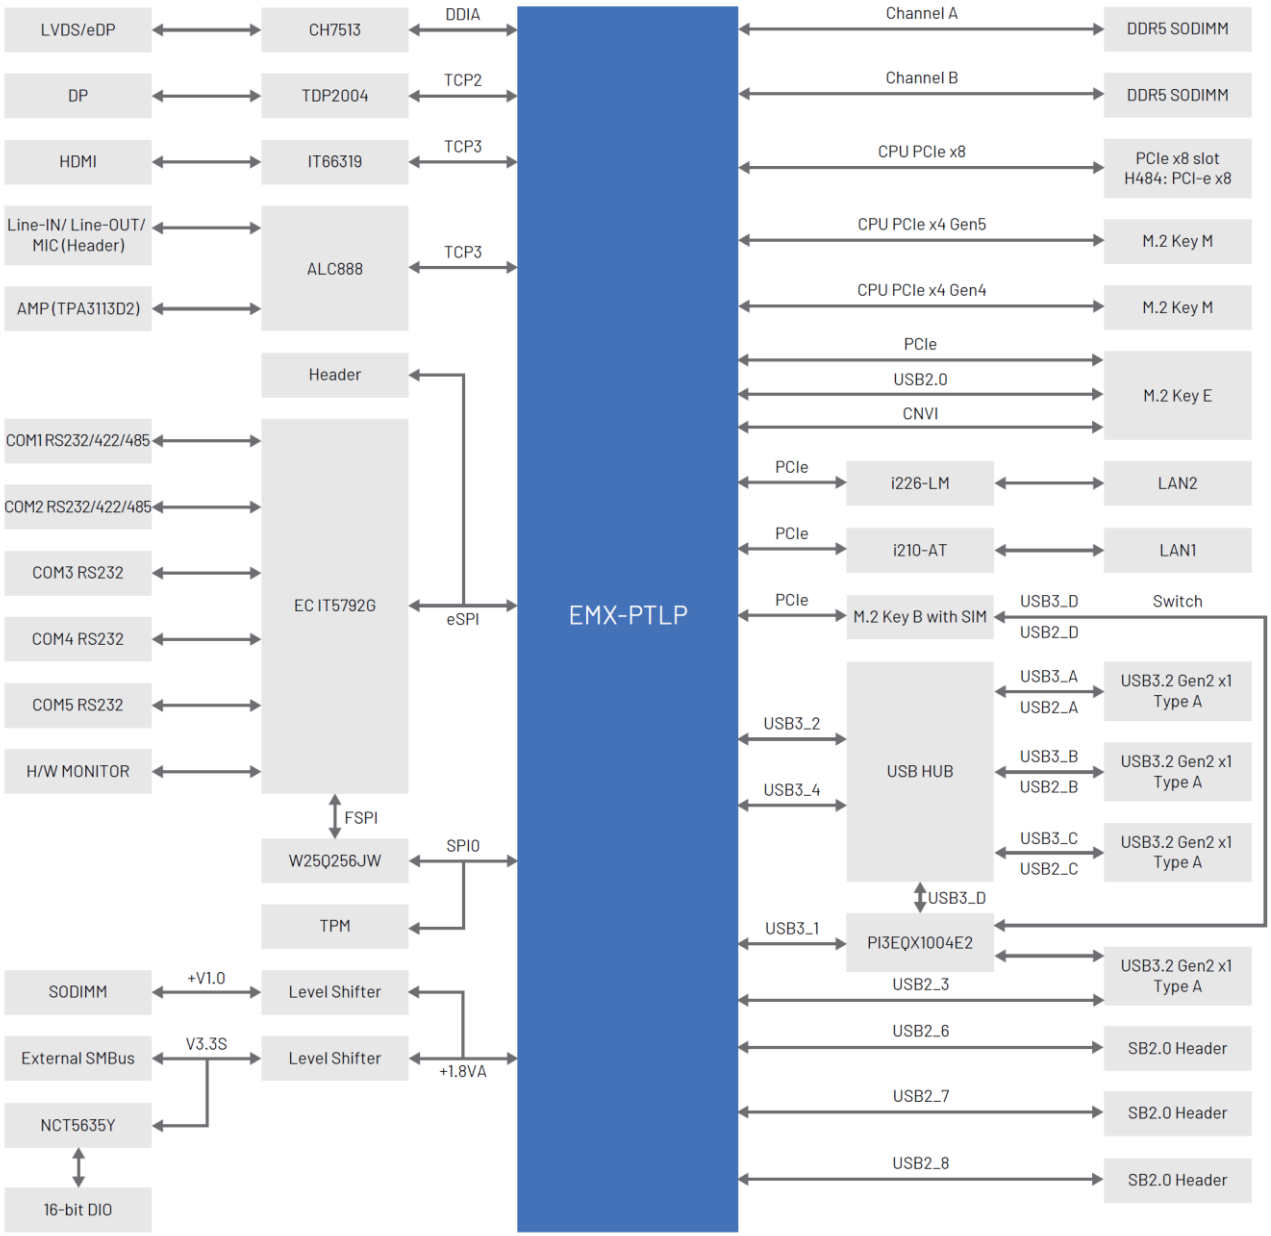

2. Hardware Configuration


2.1 Product Overview

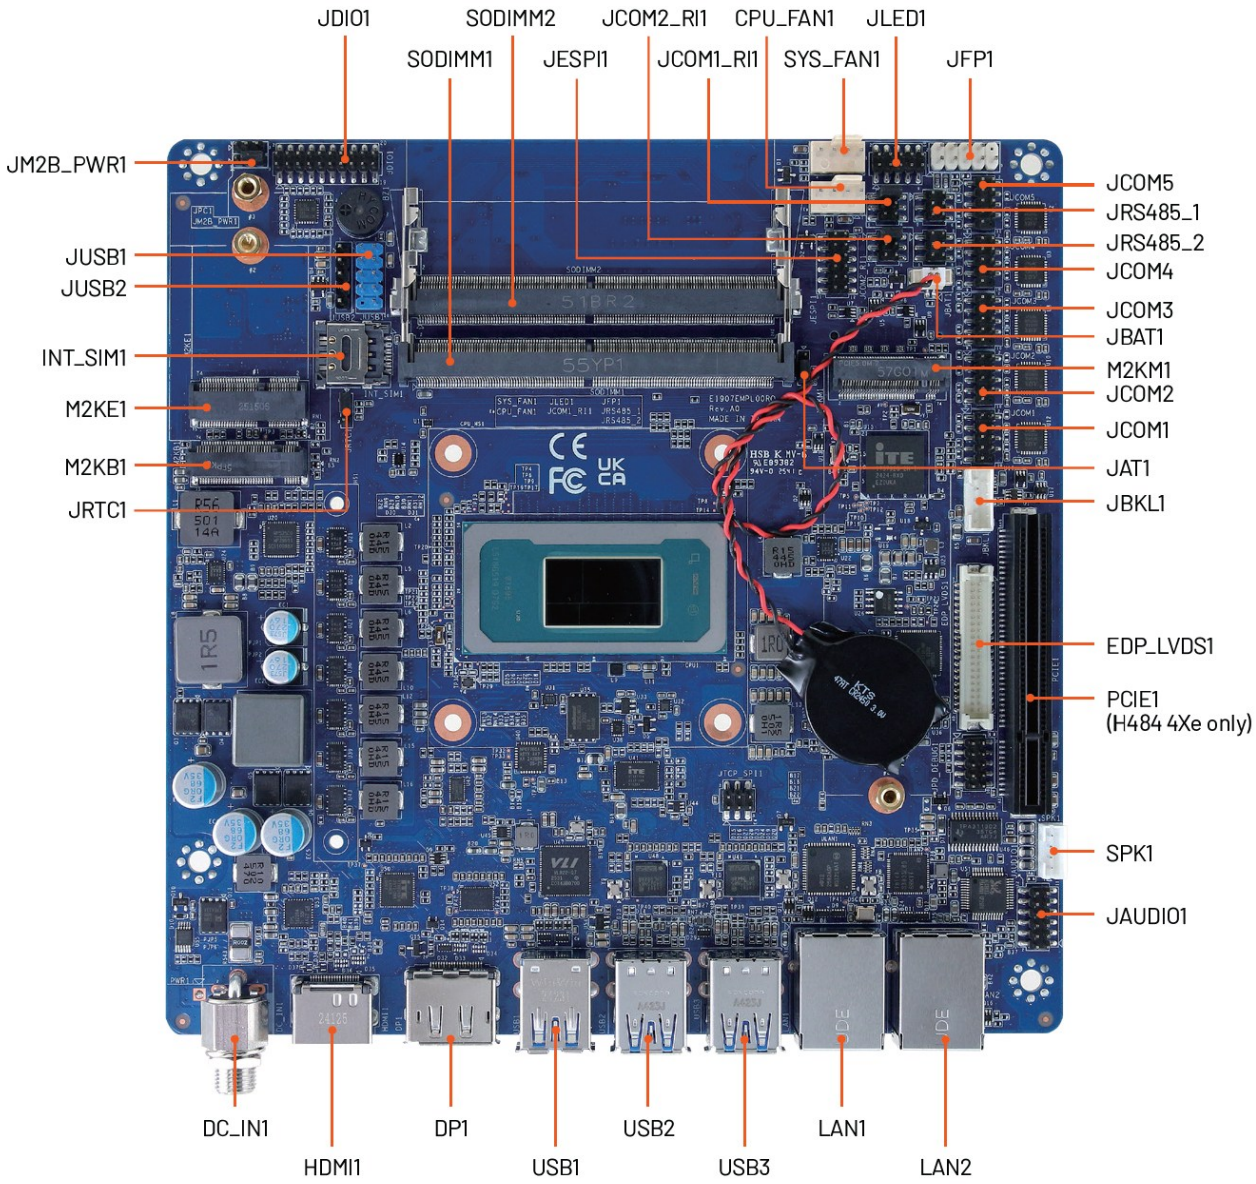

2.2 Jumper and Connector List

You can configure your board to match the needs of your application by setting jumpers. A jumper is the simplest kind of electric switch.

It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To "close" a jumper you connect the pins with the clip. To "open" a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2, and 3. In this case, you would connect either two pins.



Open Closed Closed 2-3

The jumper settings are schematically depicted in this manual as follows:



Open Closed Closed 2-3

A pair of needle-nose pliers may be helpful when working with jumpers.

Connectors on the board are linked to external devices such as hard disk drives, a keyboard, or floppy drives. In addition, the board has a number of jumpers that allow you to configure your system to suit your application.

If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any changes.

The following tables list the function of each of the board's jumpers and connectors.

Jumpers

Label	Function	Note
JM2B_PWR1	M.2 Key B power selector	3 x 1 header, pitch 2.00mm
JAT1	AT/ATX Power Mode selector	3 x 1 header, pitch 2.00mm
JRTC1	Clear CMOS	3 x 1 header, pitch 2.00mm
JCOM1_RI1/ JCOM2_RI1	Serial port 1/2 pin9 signal select	3 x 2 header, pitch 2.00mm

Connectors

Label	Function	Note
JCOM1/2/3/4/5	Serial Port 1/2/3/4/5 RS232 Mode connector	5 x 2 header, pitch 2.00mm
JRS485_1/2	Serial Port 1/2 RS485/422 Mode connector	3 x 2 header, pitch 2.00mm
JUSB1	2 x USB 2.0 connector	5 x 2 header, pitch 2.54mm

JUSB2	USB 2.0 connector	5 x 1 header, pitch 2.54mm
JDIO1	General purpose I/O connector	10 x 2 header, pitch 2.00mm
CPU_FAN1	CPU fan connector	4 x 1 wafer, pitch 2.54mm
SYS_FAN1	System fan connector	4 x 1 wafer, pitch 2.54mm
JFP1	Front Panel connector	5 x 2 header, pitch 2.54mm
JBAT1	RTC Battery connector	2 x 1 wafer, pitch 1.25mm
EDP_LVDS1	LVDS/eDP Connector	20 x 2 wafer, pitch 1.25mm Note: Matching connector: Hirose DF13-40DS-1.25C
JBKL1	LVDS backlight connector	5 x 1 wafer, pitch 2.00mm Note: Matching connector: JST PHR-5
JESPI1	eSPI debug connector	6 x 2 header, pitch 2.00mm
JAUDIO1	Front Audio connector	6 x 2 header, pitch 2.00mm
SPK1	Speaker connector	4 x 1 wafer, pitch 2.00mm
JLED1	LAN activity indicator LED connector	5 x 2 header, pitch 2.00mm
M2KE1	M.2 2230 Type E Slot	
M2KB1	M.2 2242/3042/3052 Type B Slot	
M2KM1/2	M.2 2280 TYPE M Slot	
INT_SIM1	SIM card slot	
J_N_SIM1	FPC connector for uSIM card adapter	
PCIE1	PCIe x8 slot	H484 4Xe only
DC_IN1	DC Power-in connector	
HDMI1	HDMI connector	
DP1	DP connector	
USB1	2 x USB3.2 Gen2 connector	
USB2/3	USB3.2 Gen2 + USB typeC	
LAN1/2	RJ-45 Ethernet 1/2	




Note: Please note interferance may occcur if customer may use both Key E & Key B modules together.


It is recommend to use standard 1.5mm thickness for Key E module. Bottom of Key B module height shall not be thicker than 1.1mm.

2.3 Setting Jumpers & Connectors


2.3.1 M.2 Key B power selector (JM2B_PWR1)

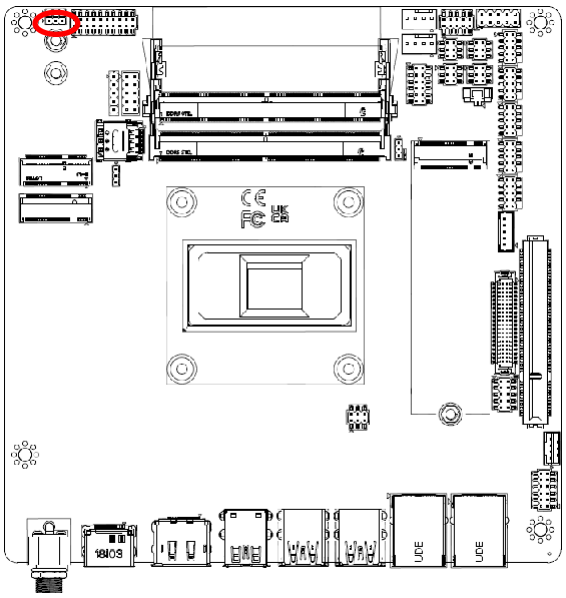

+3.3V*




+3.8V




*** Default**


2.3.2 AT/ATX Power Mode selector (JAT1)

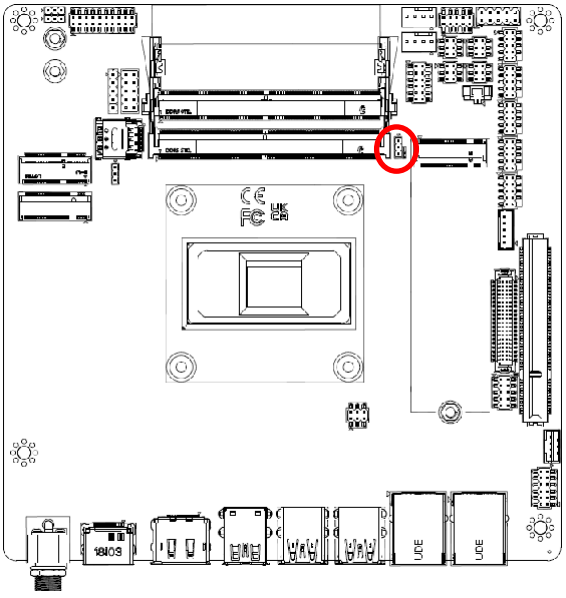

ATX*




AT




*** Default**


2.3.3 Clear CMOS (JRTC1)

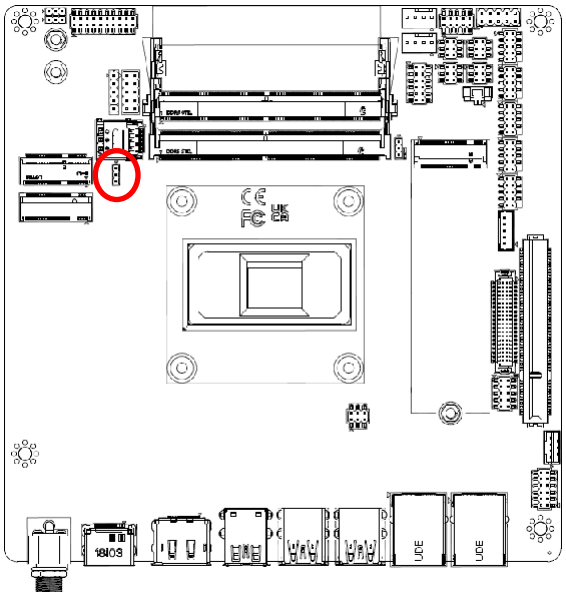

Normal*




Clear CMOS




*** Default**


2.3.4 Serial port 1/2 pin9 signal select (JCOM1_RI1/JCOM2_RI1)

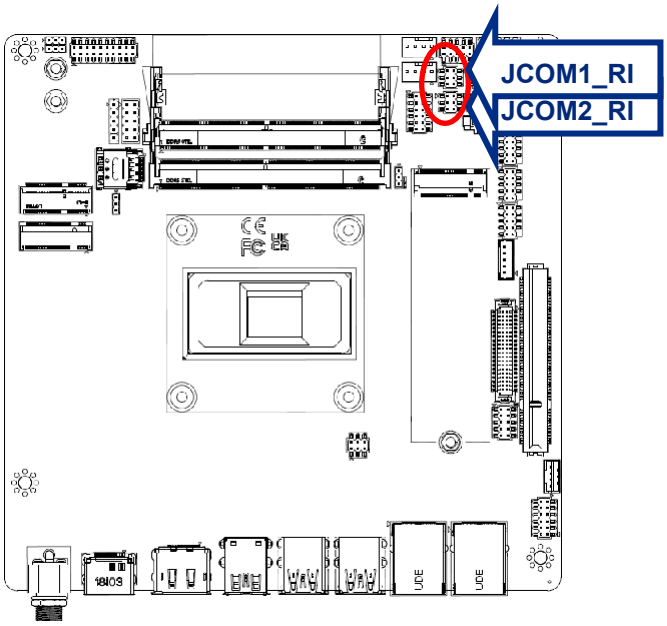


COM_RI#*



+5V





+12V



*** Default**


2.3.5 Serial Port 1 RS232 Mode connector (JCOM1)

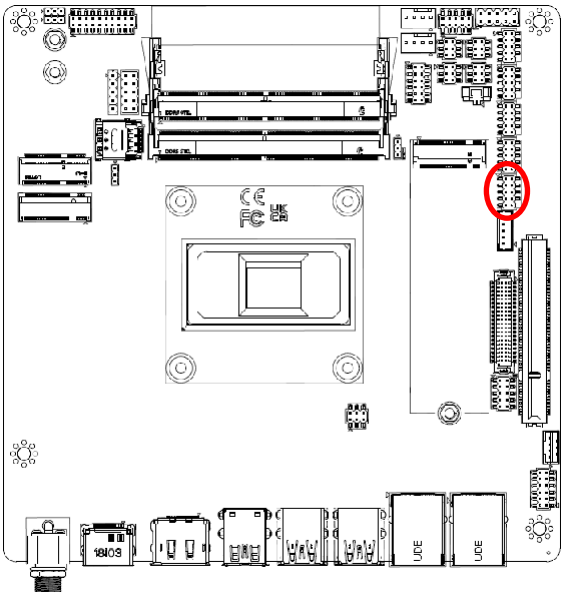




Signal	PIN	PIN	Signal
DCD#	1	2	RXD
TXD	3	4	DTR#
GND	5	6	DSR#
RTS#	7	8	CTS#
RI#	9		


2.3.6 Serial Port 2 RS232 Mode connector (JCOM2)

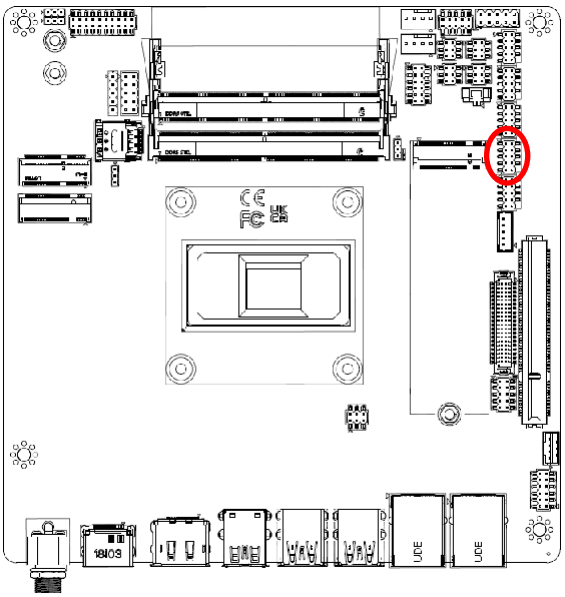




Signal	PIN	PIN	Signal
DCD#	1	2	RXD
TXD	3	4	DTR#
GND	5	6	DSR#
RTS#	7	8	CTS#
RI#	9		


2.3.7 Serial Port 3 RS232 Mode connector (JCOM3)

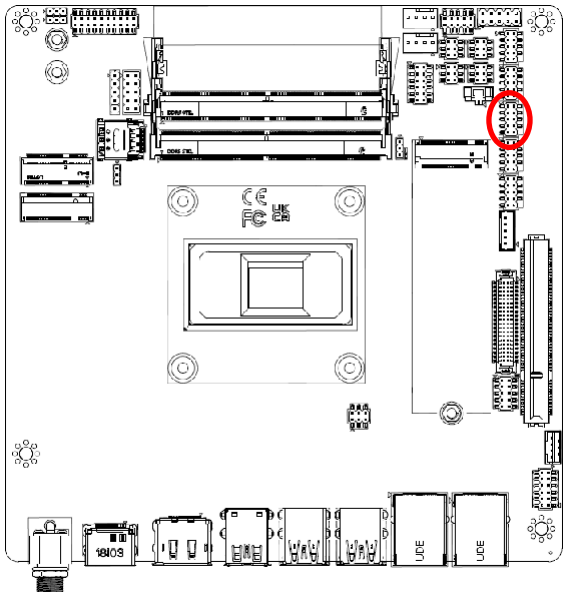




Signal	PIN	PIN	Signal
DCD#	1	2	RXD
TXD	3	4	DTR#
GND	5	6	DSR#
RTS#	7	8	CTS#
RI#	9		


2.3.8 Serial Port 4 RS232 Mode connector (JCOM4)

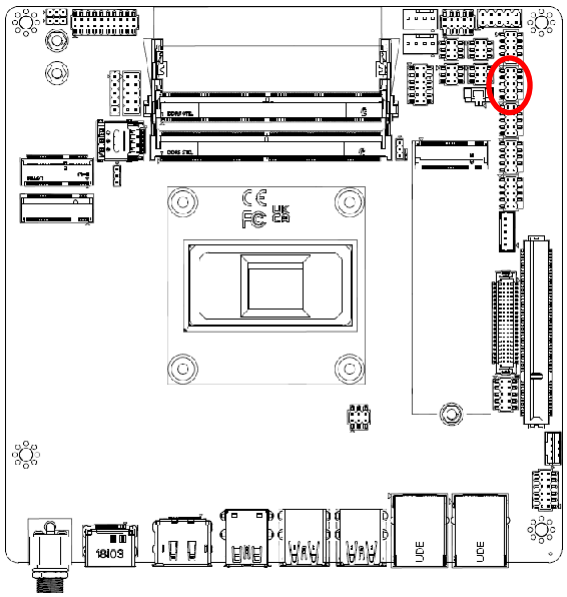




Signal	PIN	PIN	Signal
DCD#	1	2	RXD
TXD	3	4	DTR#
GND	5	6	DSR#
RTS#	7	8	CTS#
RI#	9		


2.3.9 Serial Port 5 RS232 Mode connector (JCOM5)

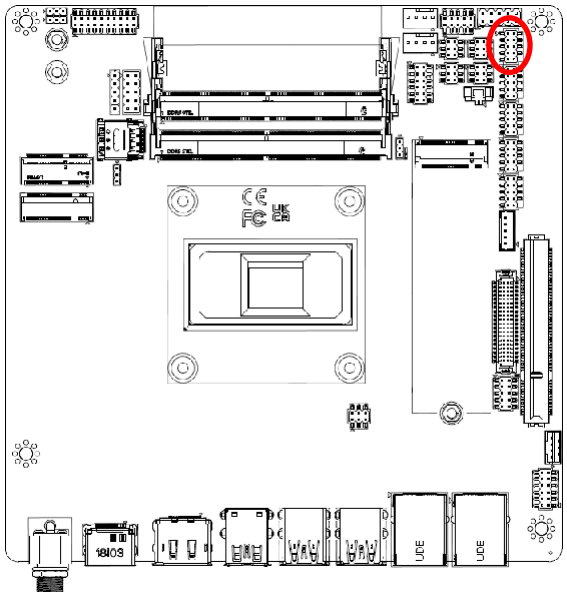




Signal	PIN	PIN	Signal
DCD#	1	2	RXD
TXD	3	4	DTR#
GND	5	6	DSR#
RTS#	7	8	CTS#
RI#	9		


2.3.10 General purpose I/O connector (JDIO1)

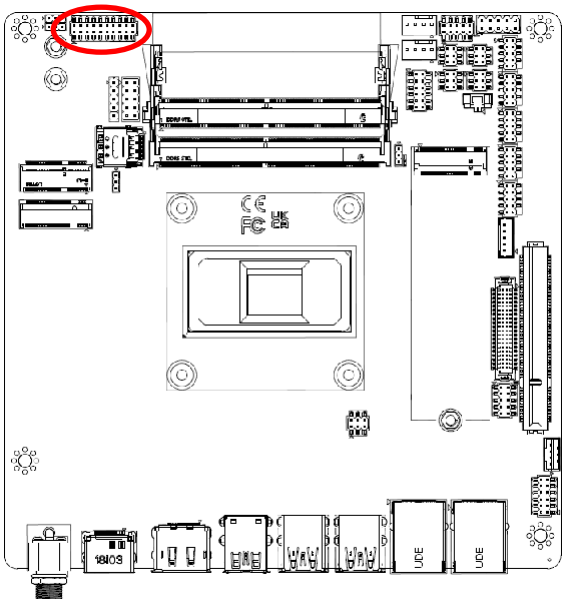

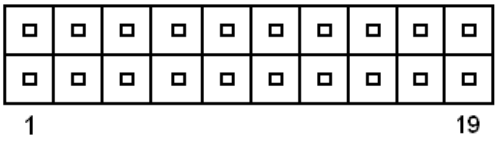

Signal	PIN	PIN	Signal
DO0	2	1	DI0
DO1	4	3	DI1
DO2	6	5	DI2
DO3	8	7	DI3
DO4	10	9	DI4
DO5	12	11	DI5
DO6	14	13	DI6
DO7	16	15	DI7
3.3V_SMB_DATA	18	17	3.3V_SMB_CLK
+5V	20	19	GND


2.3.11 Speaker connector (SPK1)

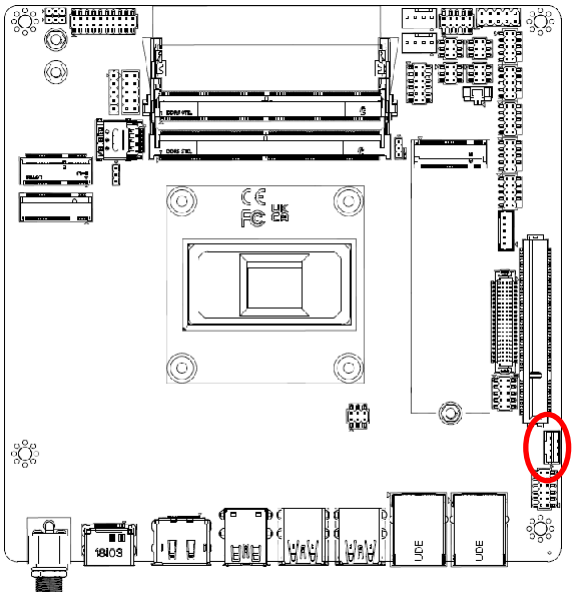




PIN	Signal
4	SPK_R-
3	SPK_R+
2	SPK_L-
1	SPK_L+


2.3.12 Front Panel connector (JFP1)

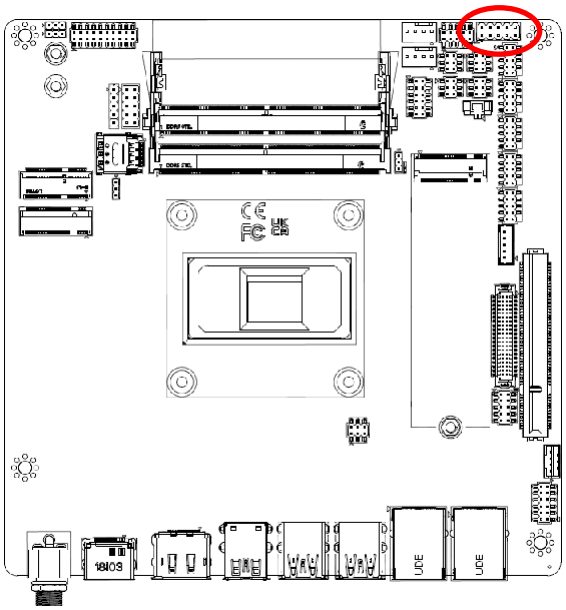




Function	Signal	PIN	PIN	Signal	Function
HDD LED	HDD_LED+	1	2	PWR_LED+	Power LED
	HDD_LED-	3	4	PWE_LED-	
Reset Button	SYS_RST#	5	6	PWRBTN#	Power Button
	GND	7	8	GND	
	NC	9			


2.3.13 LAN activity indicator LED connector (JLED1)

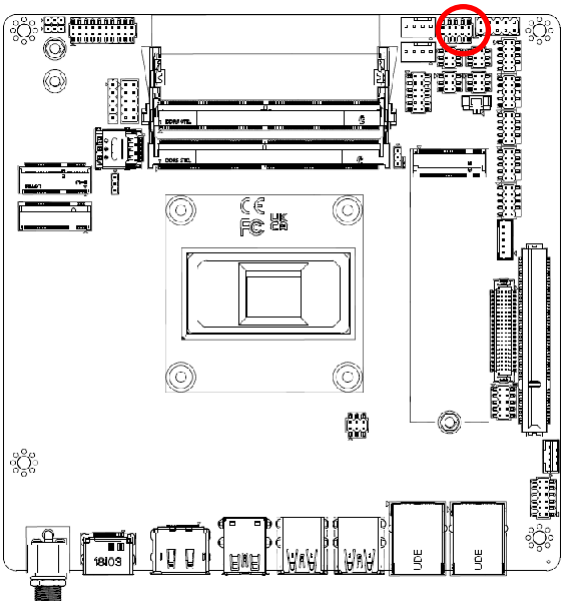




Signal	PIN	PIN	Signal
+3.3V	1	2	RSVD
+3.3V	3	4	LED_WLAN#
+3.3V	5	6	LED_BT#
LAN1_LED_ACT_P	7	8	GND
LAN2_LED_ACT_P	9	10	GND

2.3.14 Serial Port 1 RS485/422 Mode connector (JRS485-1)

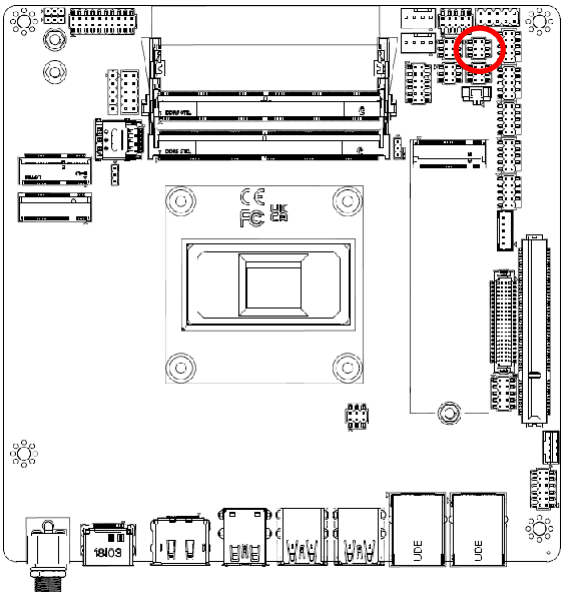



RS422


Signal	PIN	PIN	Signal
TX-	1	2	TX+
RX+	3	4	RX-
+5V	5	6	GND


Note: JRS485-1 can be selected to RS422/485 by BIOS setup

RS485

Signal	PIN	PIN	Signal
DATA-	1	2	DATA+
NC	3	4	NC
+5V	5	6	GND

2.3.15 Serial Port 2 RS485/422 Mode connector (JRS485-2)

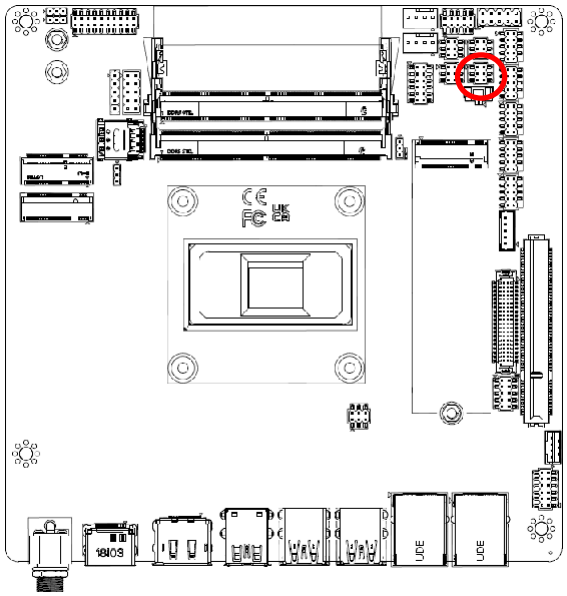



RS422


Signal	PIN	PIN	Signal
TX-	1	2	TX+
RX+	3	4	RX-
+5V	5	6	GND


Note: JRS485-2 can be selected to RS422/485 by BIOS setup

RS485

Signal	PIN	PIN	Signal
DATA-	1	2	DATA+
NC	3	4	NC
+5V	5	6	GND


2.3.16 USB 2.0 connector (JUSB1)

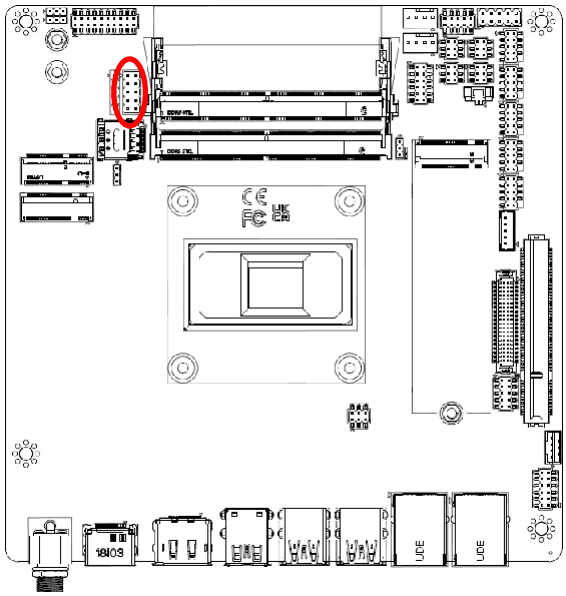



Signal	PIN	PIN	Signal
+5V	1	2	+5V
DATA-	3	4	DATA-
DATA+	5	6	DATA+
GND	7	8	GND
		10	GND


2.3.17 USB 2.0 connector (JUSB2)

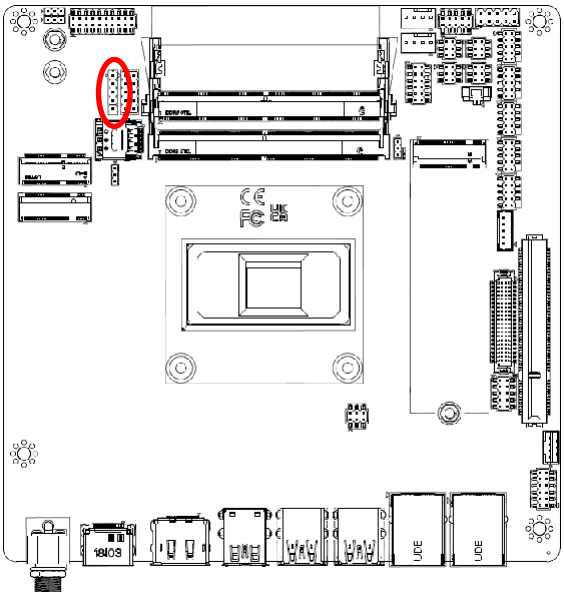




PIN	Signal
1	+5V
2	DATA-
3	DATA+
4	GND
5	GND


2.3.18 RTC Battery connector (JBAT1)

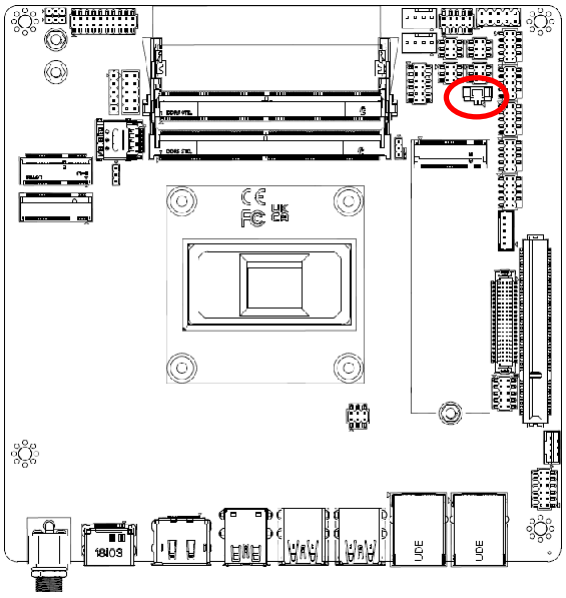




PIN	Signal
1	+VDD_RTC
2	GND


2.3.19 eSPI debug connector (JESPI1)

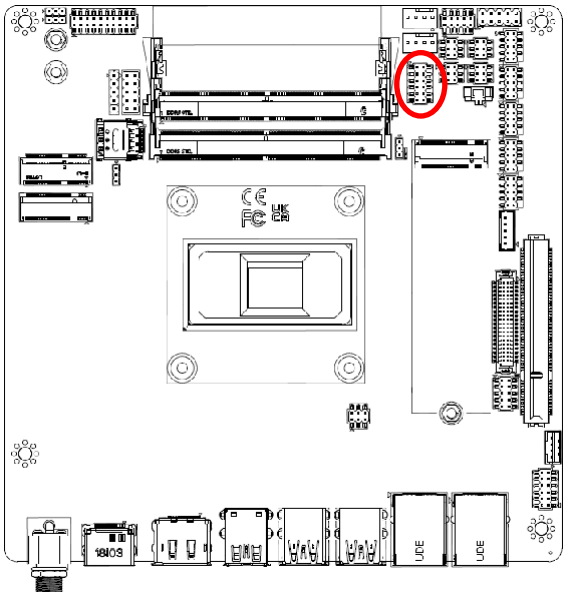




Signal	PIN	PIN	Signal
ESPI_IO0_80P	1	2	+3.3V
ESPI_IO1_80P	3	4	BUF_PLT_RST#_3V3
ESPI_IO2_80P	5	6	ESPI_CS0#_80P
ESPI_IO3_80P	7	8	ESPI_CLK_80P
ESPI_CS1#_80P	9	10	GND
ESPI_RST#	11	12	ESPI_ALERT#_80P


2.3.20 CPU fan connector (CPU_FAN1)

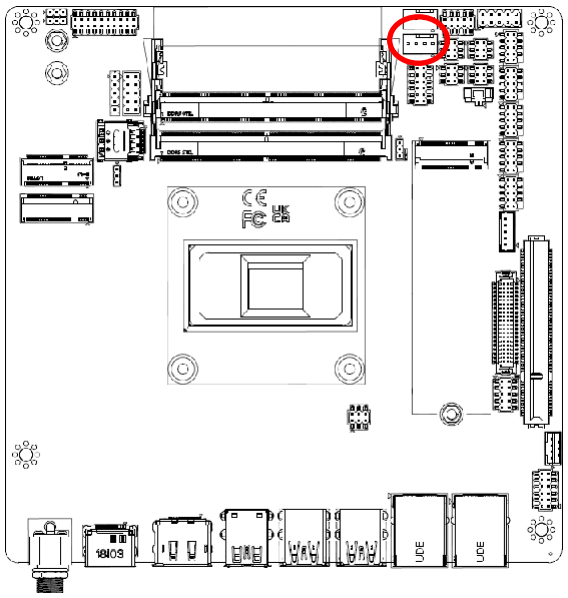




PIN	Signal
1	GND
2	+12V
3	TACH
4	PWM


2.3.21 System fan connector (SYS_FAN1)

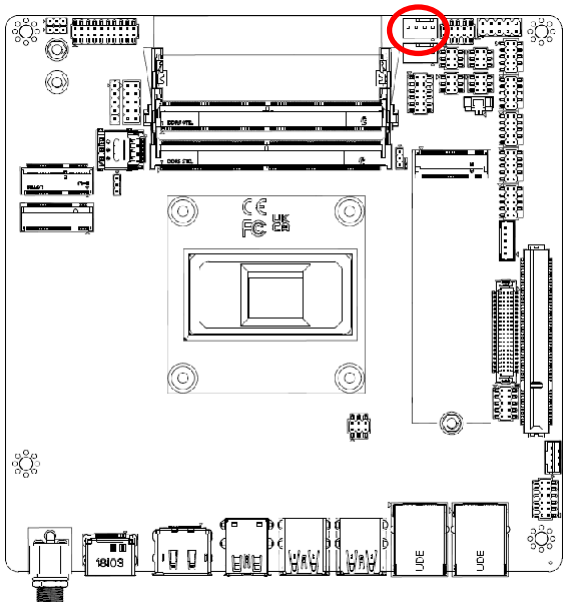




PIN	Signal
1	GND
2	+12V
3	TACH
4	PWM


2.3.22 Front Audio connector (JAUDIO1)

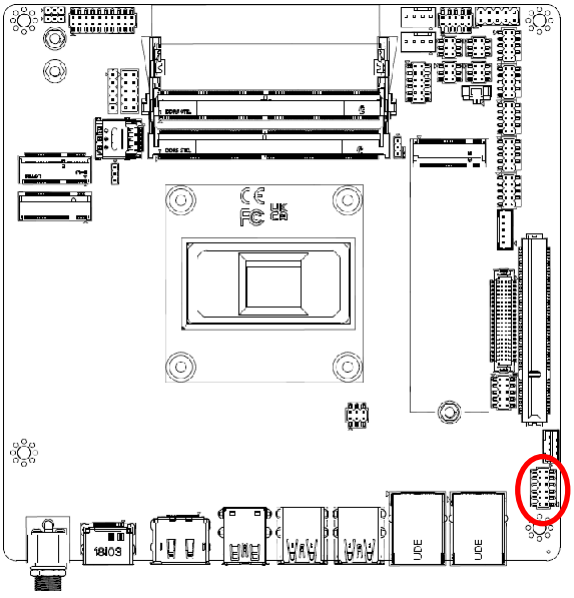




Signal	PIN	PIN	Signal
GND	12	11	MIC1_JD
LINE1_JD	10	9	LINEOUT1_JD
MICIN_L	8	7	MICIN_R
LINEIN_L	6	5	LINEIN_R
GND	4	3	GND
LINEOUT_L	2	1	LINEOUT_R

2.3.23 LVDS/eDP connector (EDP_LVDS1)

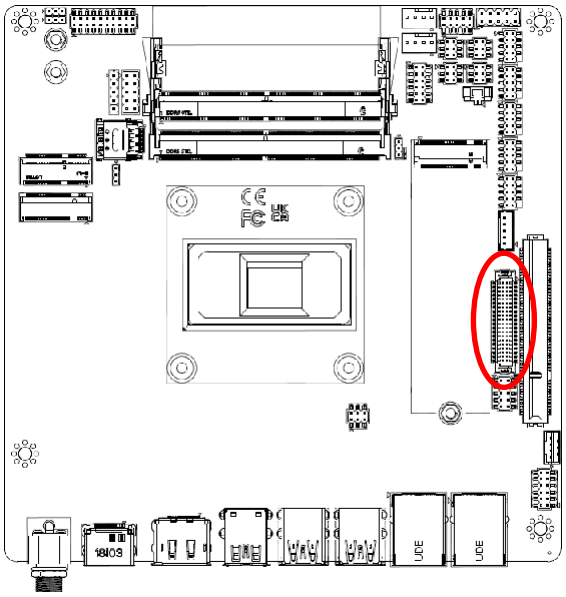




Note: Pin38 Low Enabled LVDS / High disables LVDS (Default High)

Signal	PIN	PIN	Signal
+5V	2	1	+3.3V
+5V	4	3	+3.3V
+5V	6	5	+3.3V
GND	8	7	GND
LVDS_A_DATA_P_0_EDP_HPD	10	9	LVDS_A_DATA_P_1_EDPP1
LVDS_A_DATA_N_0	12	11	LVDS_A_DATA_N_1_EDPN1
GND	14	13	GND
LVDS_A_DATA_P_2_EDPP0	16	15	LVDS_A_DATA_P_3
LVDS_A_DATA_N_2_EDPN0	18	17	LVDS_A_DATA_N_3
GND	20	19	GND
LVDS_B_DATA_P_0	22	21	LVDS_B_DATA_P_1
LVDS_B_DATA_N_0	24	23	LVDS_B_DATA_N_1
GND	26	25	GND
LVDS_B_DATA_P_2	28	27	LVDS_B_DATA_P_3
LVDS_B_DATA_N_2	30	29	LVDS_B_DATA_N_3
GND	32	31	GND
LVDS_A_CLK_P_EDPAUXP	34	33	LVDS_B_CLK_P
LVDS_A_CLK_N_EDPAUXN	36	35	LVDS_B_CLK_N
LVDS Detection	38	37	GND
+12V	40	39	+12V

2.3.24 LVDS backlight connector (JBKL1)

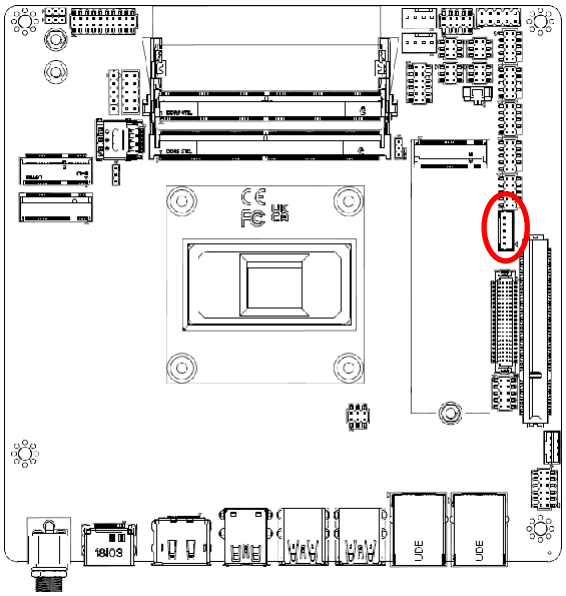




PIN	Signal
5	+5V
4	VBRIGHT
3	BKLEN
2	GND
1	+12V

3. Drivers Installation

All the drivers are available on Avalue Downloads Area (https://www.avaluetech.com/en/support/download). Type the model name and press Enter to find all the relevant software, utilities, and documentation.

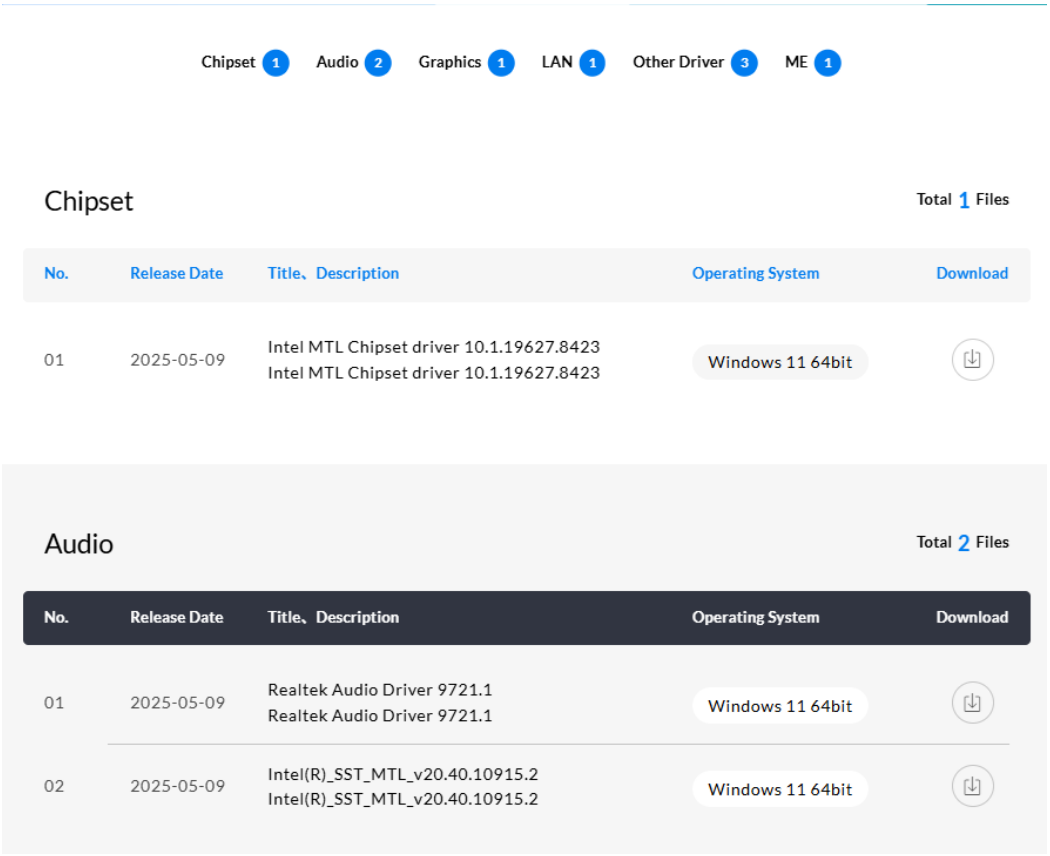


Note: Installation procedures and screen shots in this section are for your reference and may not be exactly the same as shown on your screen.

3.1 Install Chipset Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

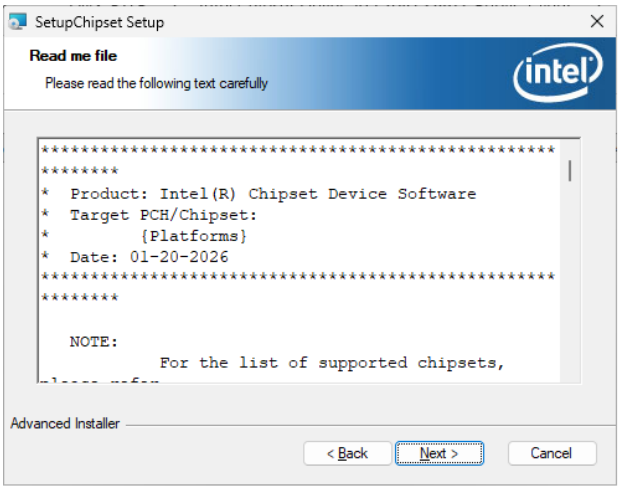


Step 3. Click **Next**.

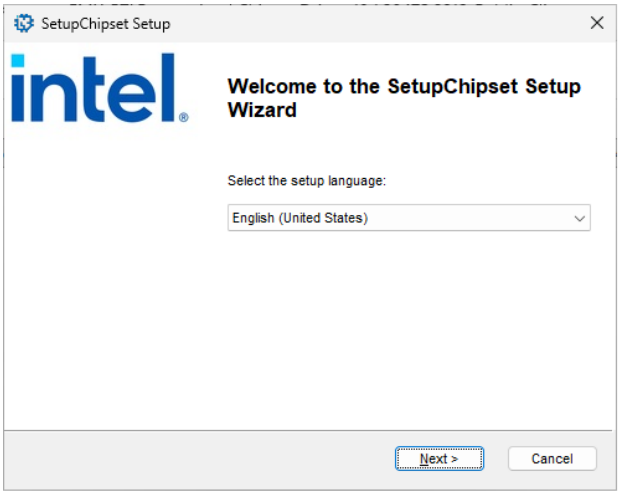


Step 1. Click **Next**.

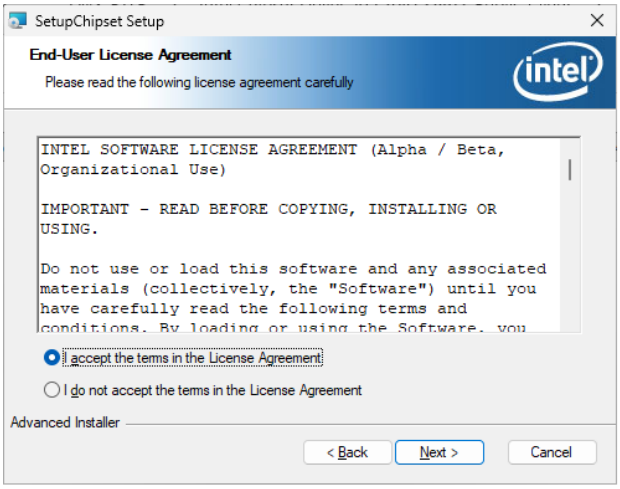


Step 4. Click **Next**.

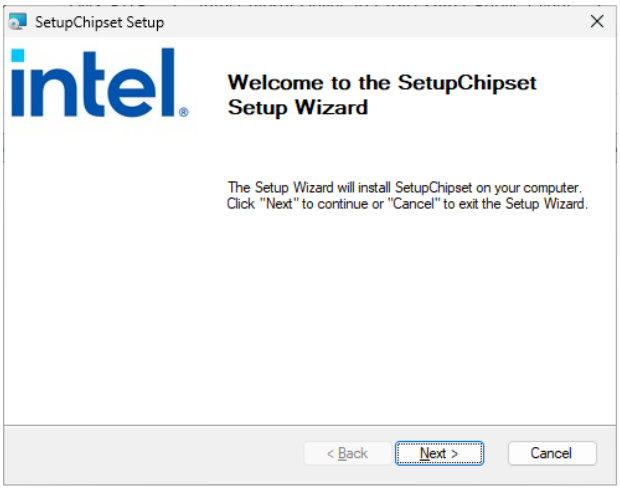


Step 2. Click **Next**.

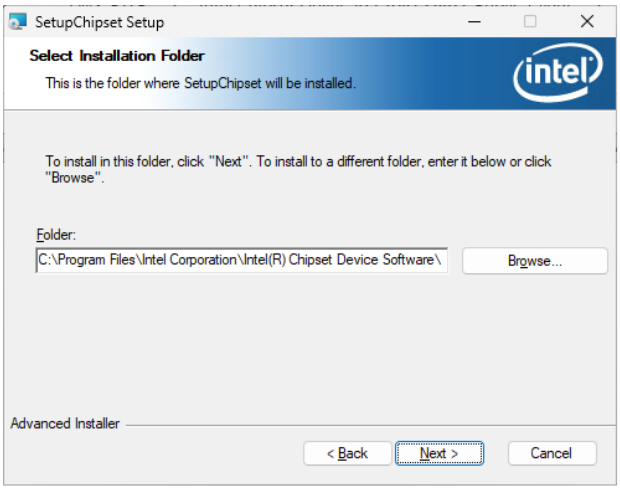

Step 5. Click **Next**.

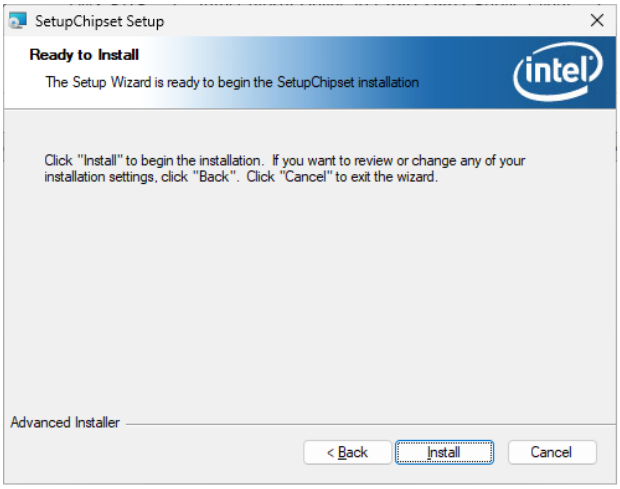

Step 6. Click **Install**.

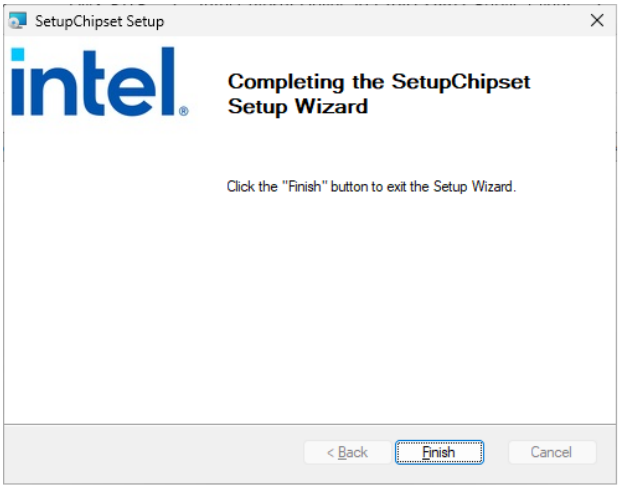


Step 7. Click **Finish** continue setup.

3.2 Install Graphics Driver

All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

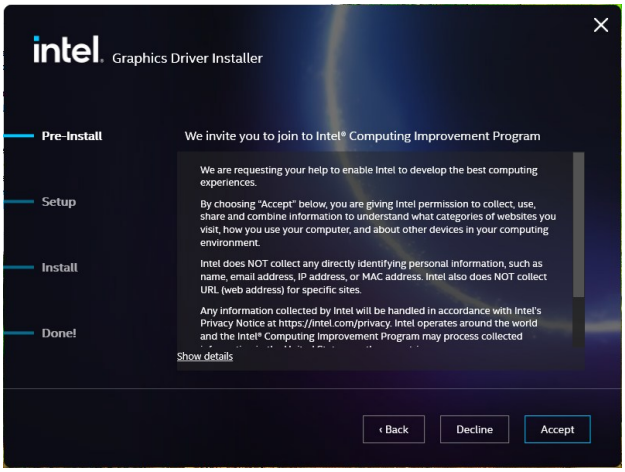


Step 3. Click **Accept**.




Step 1. Click **Begin installation**.

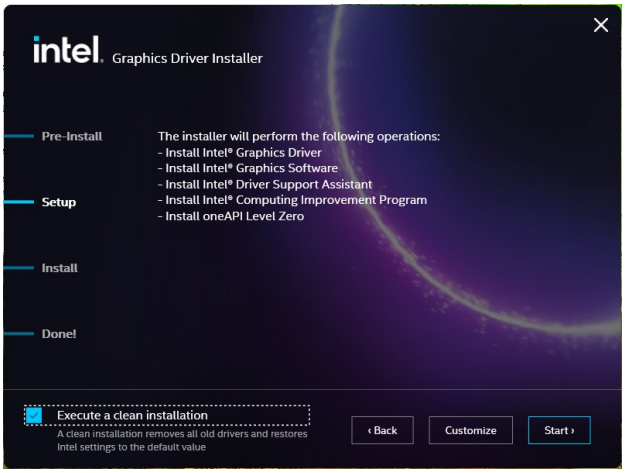

Step 4. Click **Start** to complete the setup.

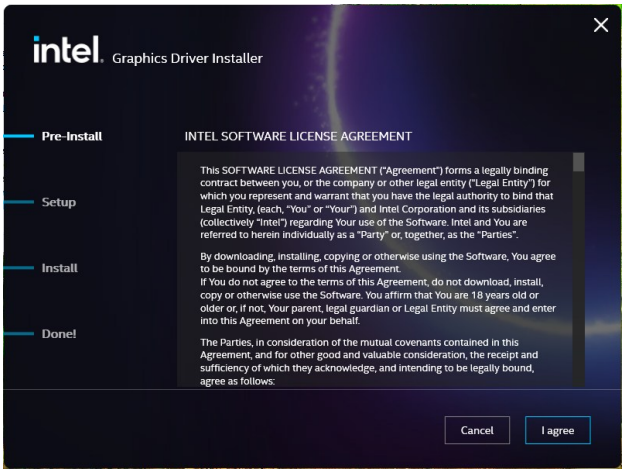

Step 2. Click **I agree**.

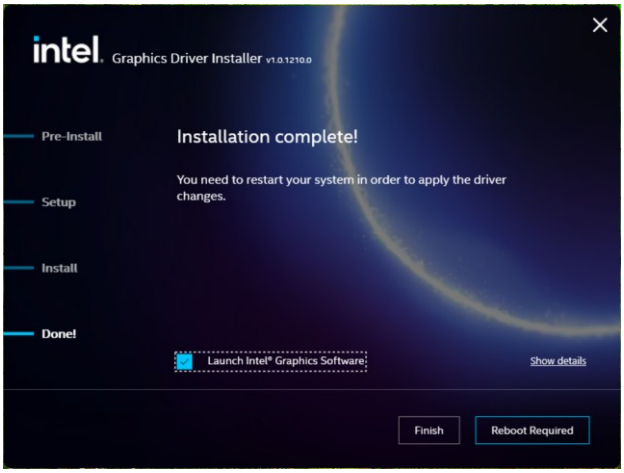


Step 5. Click **Finish** to complete the setup.

3.3 Install LAN Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com

Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

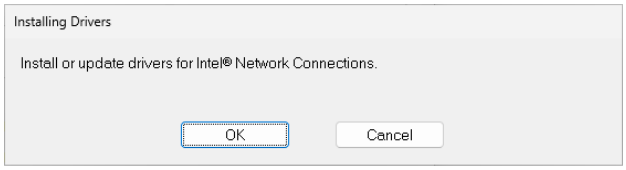

Step 1. Click **OK** to continue setup.

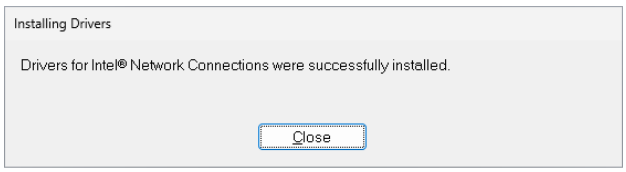


Step 2. Click **Close**.

3.4 Install ME Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

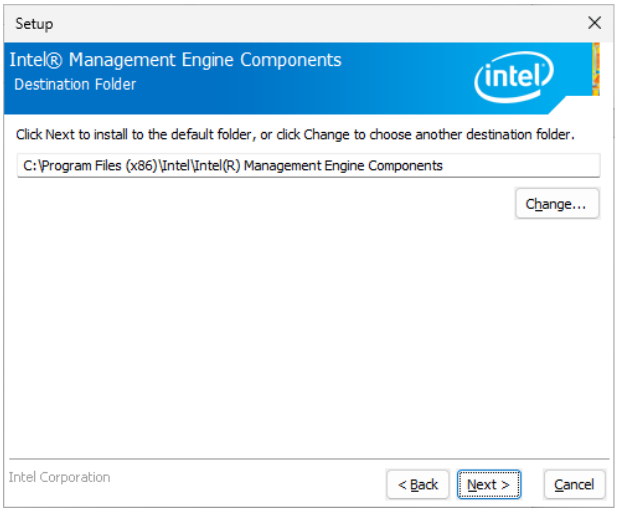


Step 3. Click **Next**.

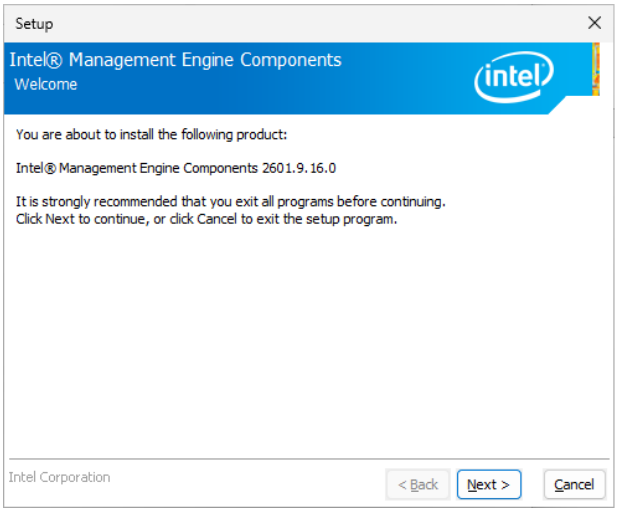

Step 1. Click **Next** to continue setup.

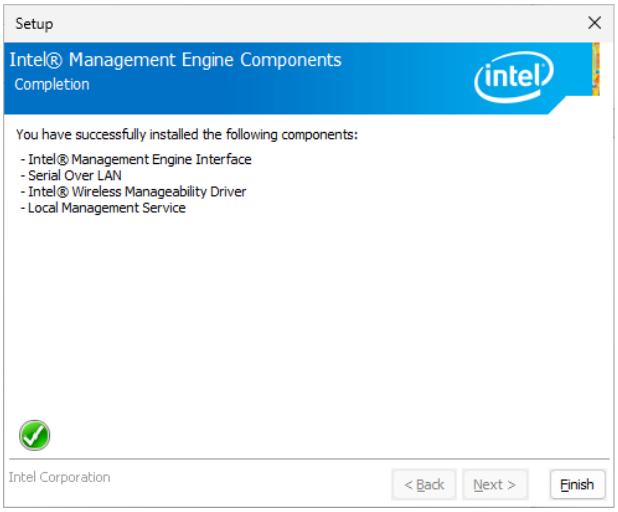

Step 4. Click **Finish** to complete the setup.

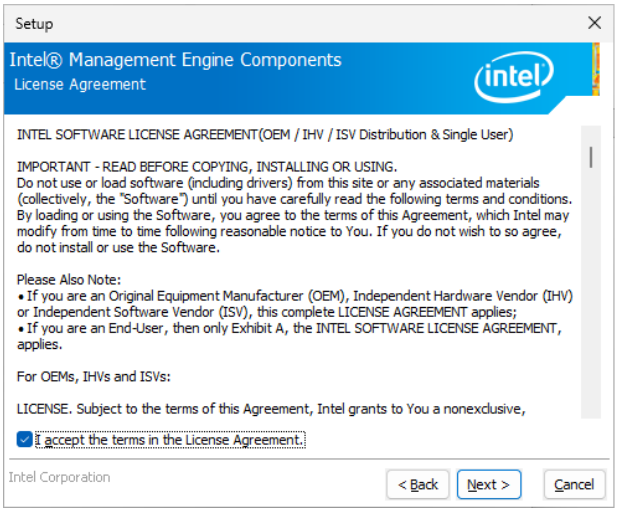


Step 2. Click **Next**.

3.5 Install Serial IO Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

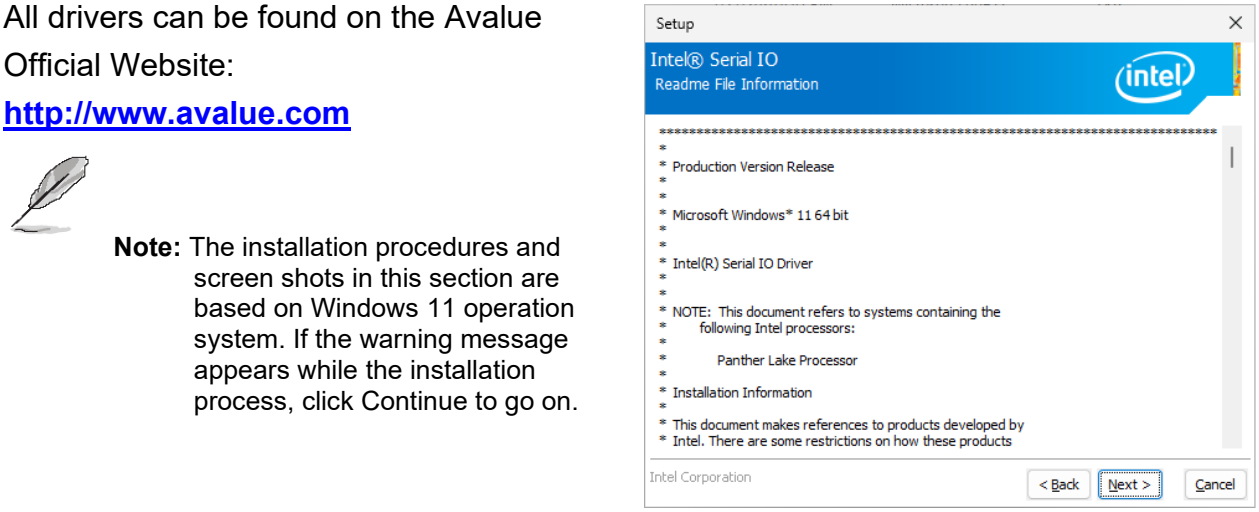


Step 3. Click **Next**.

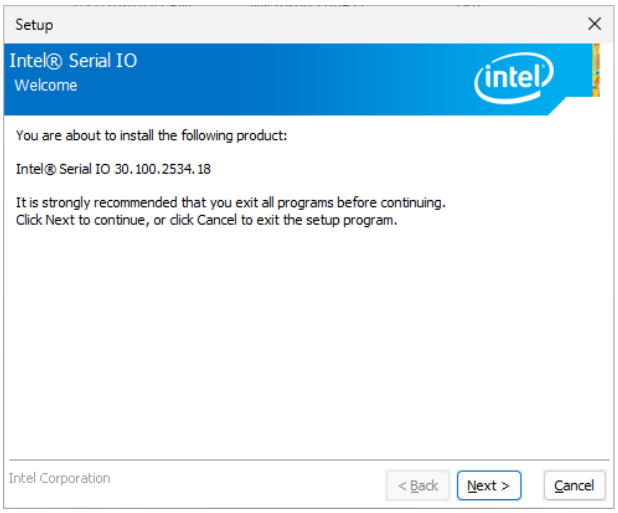


Step 1. Click **Next** to continue setup.

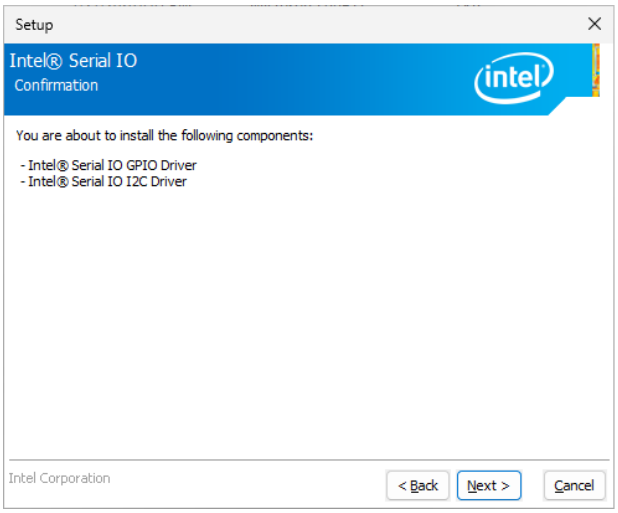

Step 4. Click **Next**.

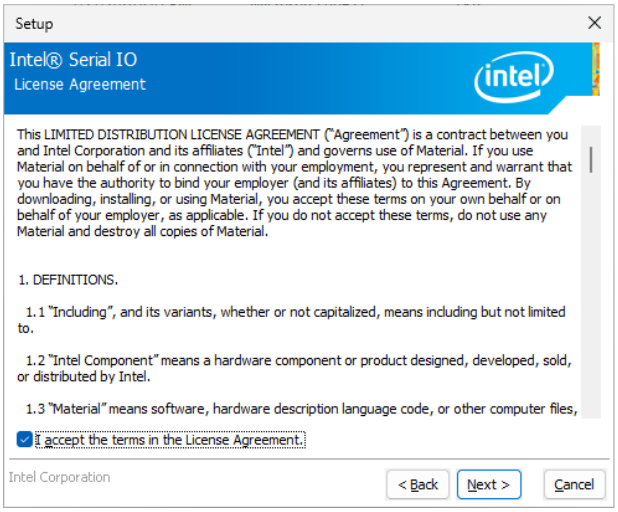

Step 2. Click **Next**.

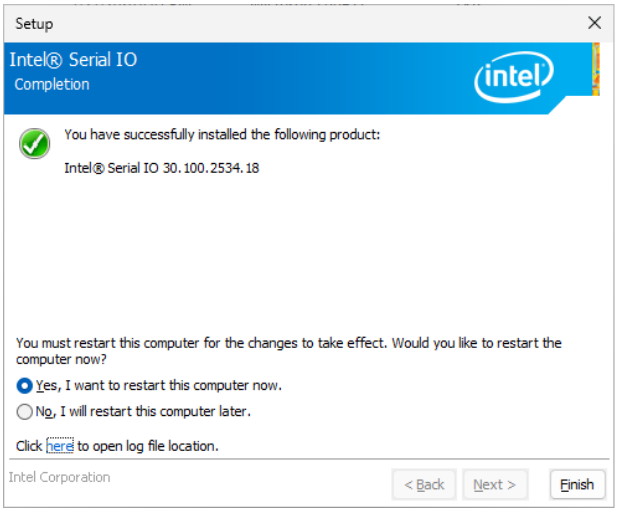


Step 5. Click **Finish** to complete the setup.

3.6 Install ISSEI Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

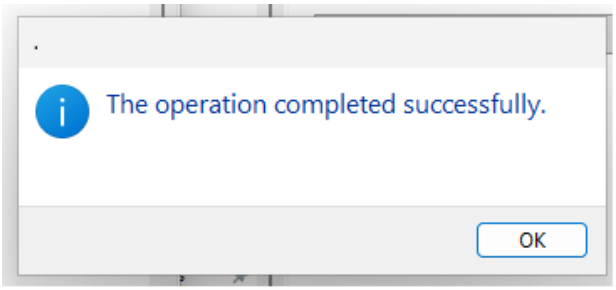


Step 3. Click **OK**.

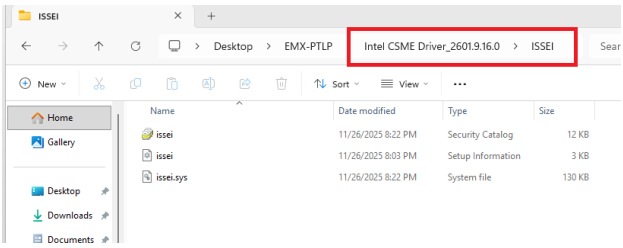

Step 1. Click **issei** to continue setup.

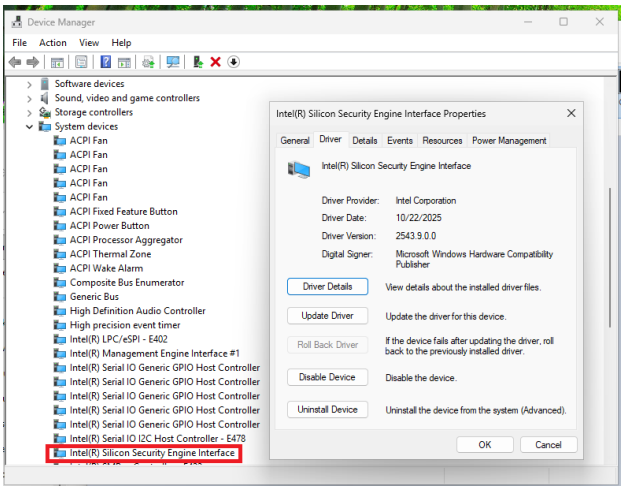

Step 4. Click **OK** to complete the setup.

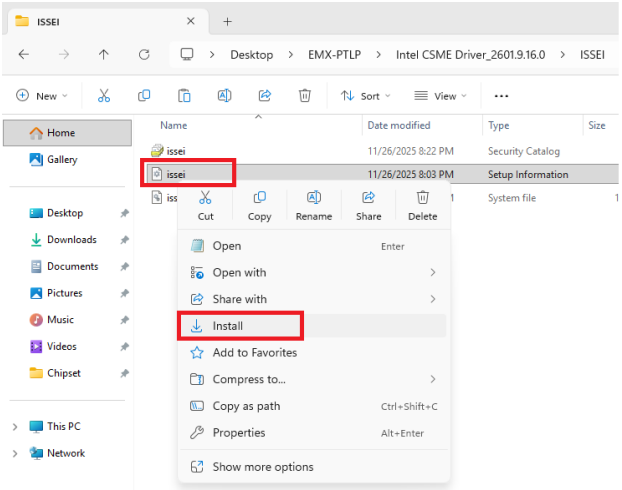


Step 2. Click **Install**.

3.7 Install ISST Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

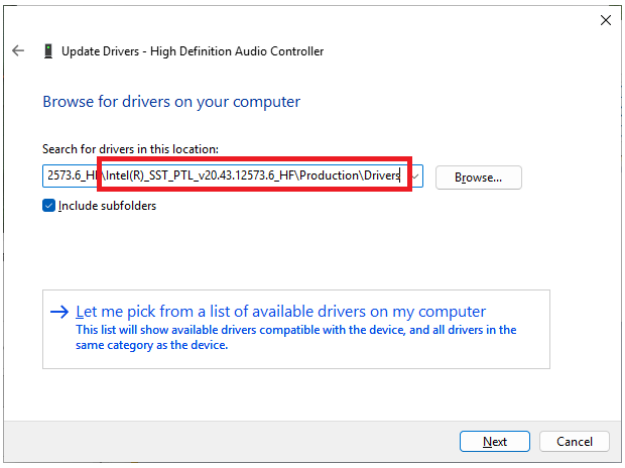


Step 3. Click **Next**.

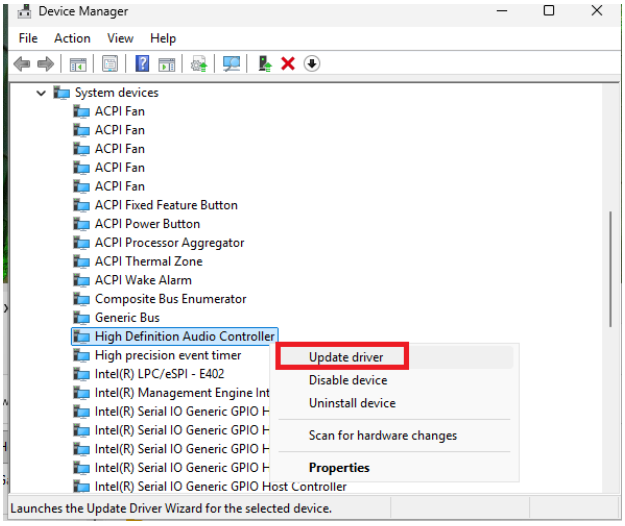

Step 1. Click **Update driver**.

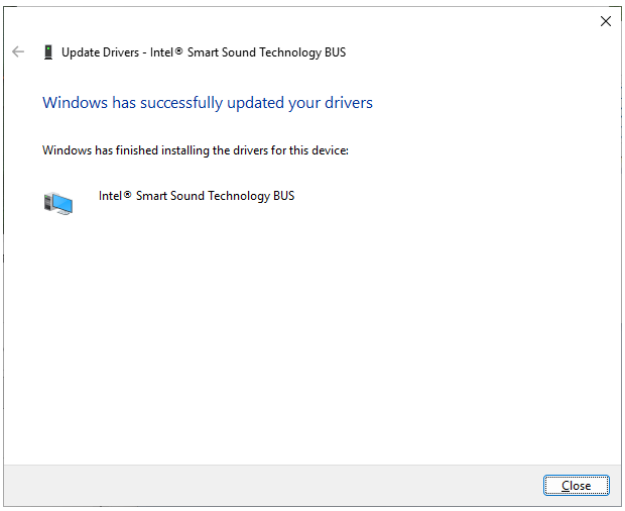

Step 4. Click **Close**.

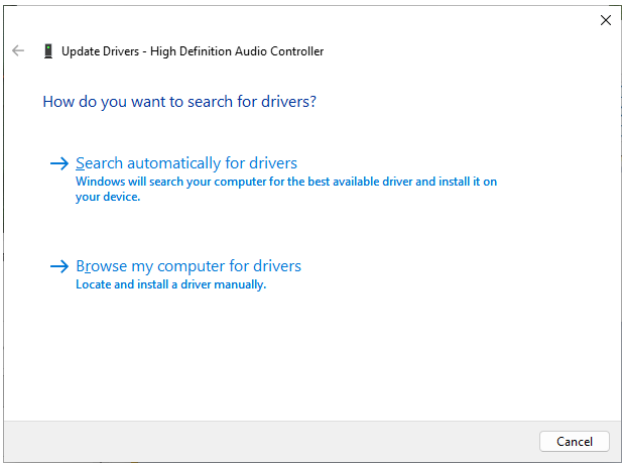


Step 2. Click **Browse my computer for drivers**.

3.8 Install Audio Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com

Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

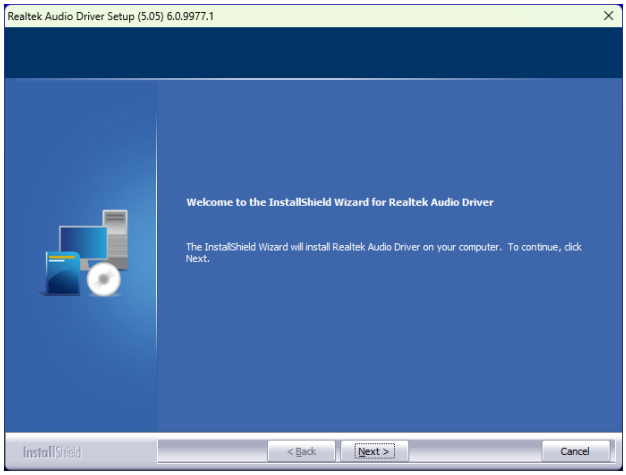

Step 1. Click **Next** to continue setup.

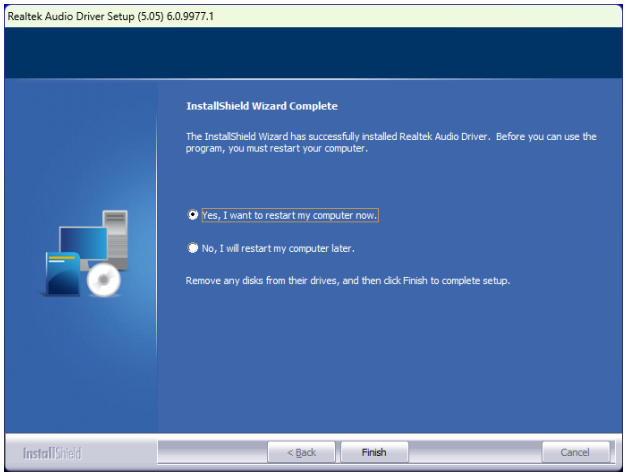


Step 2. Click **Finish** to complete the setup.

3.9 Install NPU Driver


All drivers can be found on the Avalue Official Website:

http://www.avalue.com


Note: The installation procedures and screen shots in this section are based on Windows 11 operation system. If the warning message appears while the installation process, click Continue to go on.

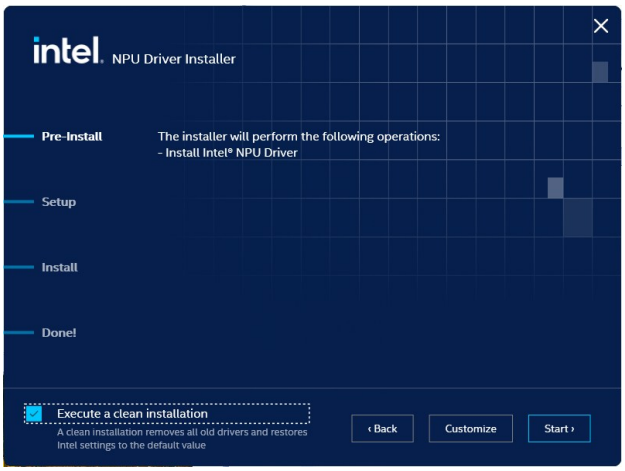


Step 3. Click **Start**.

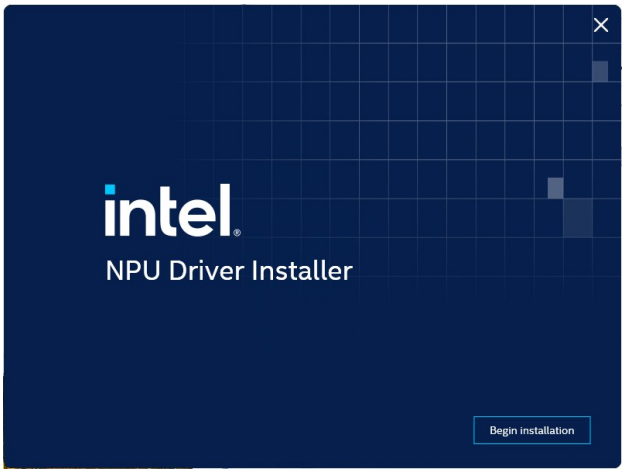

Step 1. Click **Begin installation**.

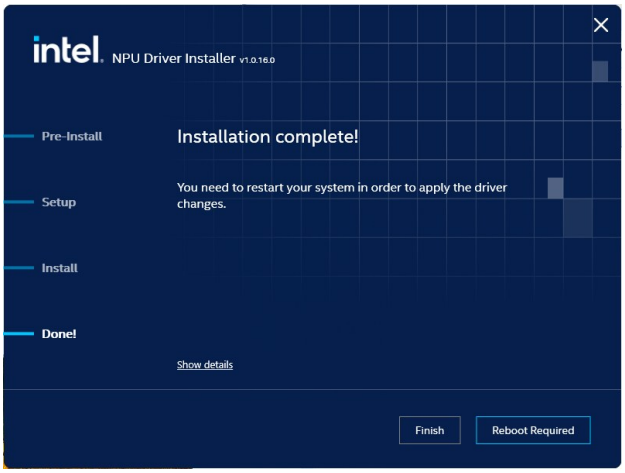

Step 4. Click **Finish** to complete the setup.

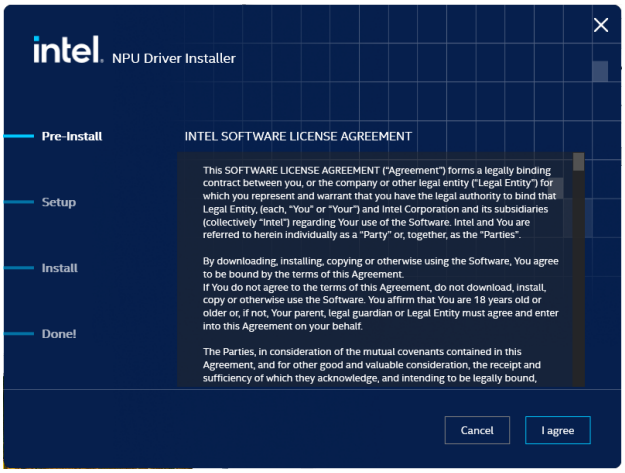

Step 2. Click **I agree**.

4.BIOS Setup

4.1 Introduction

The BIOS setup program allows users to modify the basic system configuration. In this following chapter will describe how to access the BIOS setup program and the configuration options that may be changed.

4.2 Starting Setup

AMI BIOS™ is immediately activated when you first power on the computer. The BIOS reads the system information contained in the NVRAM and begins the process of checking out the system and configuring it. When it finishes, the BIOS will seek an operating system on one of the disks and then launch and turn control over to the operating system.

While the BIOS is in control, the Setup program can be activated in one of two ways:
By pressing <ESC> or <Del> immediately after switching the system on, or
By pressing the < ESC> or <Del> key when the following message appears briefly at the left-top of the screen during the POST (Power On Self Test).

Press <ESC> or <Del> to enter SETUP

If the message disappears before you respond and you still wish to enter Setup, restart the system to try again by turning it OFF then ON or pressing the "RESET" button on the system case. You may also restart by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

4.3 Using Setup

In general, you use the arrow keys to highlight items, press <Enter> to select, use the PageUp and PageDown keys to change entries, press <F1> for help and press <Esc> to quit. The following table provides more detail about how to navigate in the Setup program using the keyboard.

Button	Description
↑	Move to previous item
↓	Move to next item
←	Move to the item in the left hand
→	Move to the item in the right hand
Esc key	Main Menu -- Quit and not save changes into NVRAM Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
+ key	Increase the numeric value or make changes
- key	Decrease the numeric value or make changes
F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2 key	Previous Values
F3 key	Optimized defaults
F4 key	Save & Exit Setup

- **Navigating Through The Menu Bar**

  Use the left and right arrow keys to choose the menu you want to be in.



Note: Some of the navigation keys differ from one screen to another.

- **To Display a Sub Menu**

  Use the arrow keys to move the cursor to the sub menu you want. Then press <Enter>. A "➢" pointer marks all sub menus.

4.4 Getting Help

Press F1 to pop up a small help window that describes the appropriate keys to use and the possible selections for the highlighted item. To exit the Help Window press <Esc> or the <Enter> key again.

4.5 In Case of Problems

If, after making and saving system changes with Setup, you discover that your computer no longer is able to boot, the AMI BIOS supports an override to the NVRAM settings which resets your system to its defaults.


The best advice is to only alter settings which you thoroughly understand. To this end, we strongly recommend that you avoid making any changes to the chipset defaults. These defaults have been carefully chosen by both BIOS Vendor and your systems manufacturer to provide the absolute maximum performance and reliability. Even a seemingly small change to the chipset setup has the potential for causing you to use the override.

4.6 BIOS setup

Once you enter the Aptio Setup Utility, the Main Menu will appear on the screen. The Main Menu allows you to select from several setup functions and exit choices. Use the arrow keys to select among the items and press <Enter> to accept and enter the sub-menu.

4.6.1 Main Menu

This section allows you to record some basic hardware configurations in your computer and set the system clock.

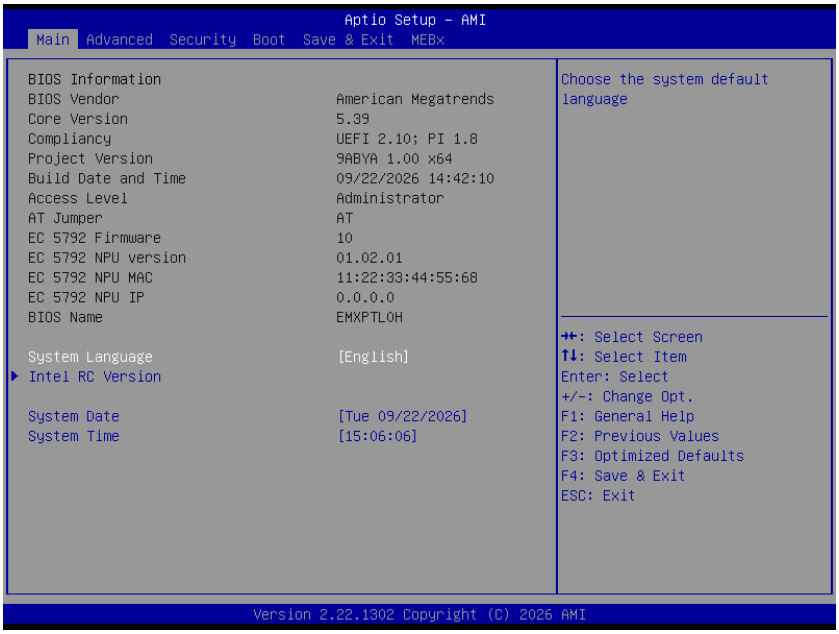



4.6.1.1 System Language

This option allows choosing the system default language.

4.6.1.2 System Date

Use the system date option to set the system date. Manually enter the month, day and Year.


4.6.1.3 System Time

Use the system time option to set the system time. Manually enter the hours, minutes and seconds.


Note: The BIOS setup screens shown in this chapter are for reference purposes only, and may not exactly match what you see on your screen.
Visit the Avalue website (www.avalue.com) to download the latest product and BIOS information.

4.6.2 Advanced Menu

This section allows you to configure your CPU and other system devices for basic operation through the following sub-menus.

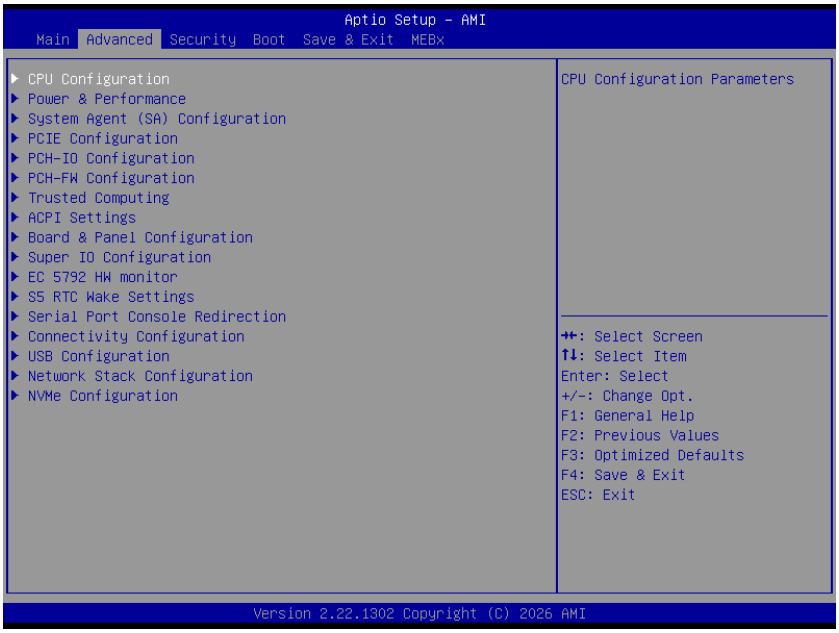


4.6.2.1 CPU Configuration

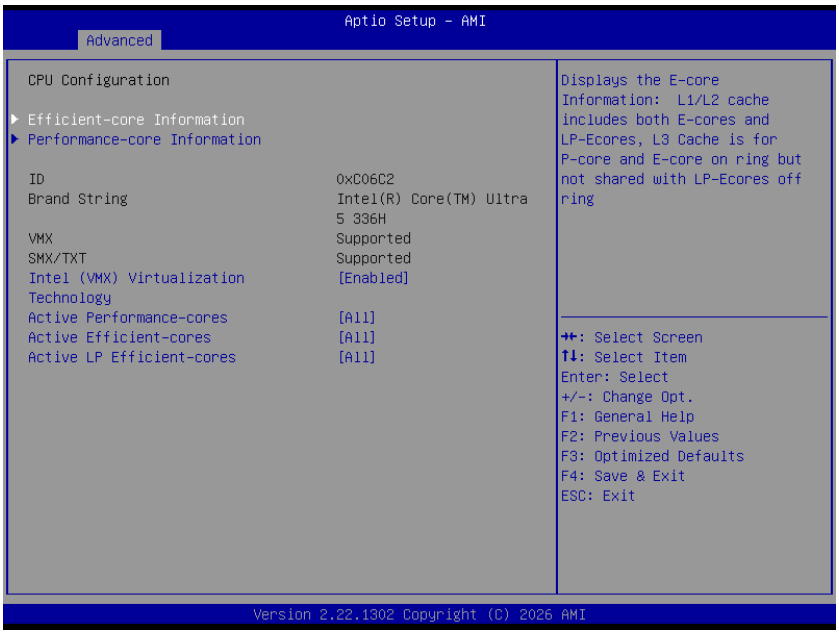


Item	Options	Description
Intel (VMX) Virtualization Technology	Disabled, Enabled**[Default]**	When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.
Active Performance-cores	All	Number of P-cores to enable in each processor package. Note: P-Cores must be greater than zero as per Reset HAS.
Active Efficient-cores	All	Number of E-cores to enable in each processor package. Note: Number of P-cores, E-cores and LP E-cores are looked at together. When all are {0,0,0}, Pcode will enable all cores.
Active LP Efficient-cores	All	Number of LP E-cores off ring. Note: Number of P-cores, E-cores and LP E-cores are looked at together. When all are {0,0,0}, Pcode will enable all cores.

4.6.2.1.1 Efficient-core Information

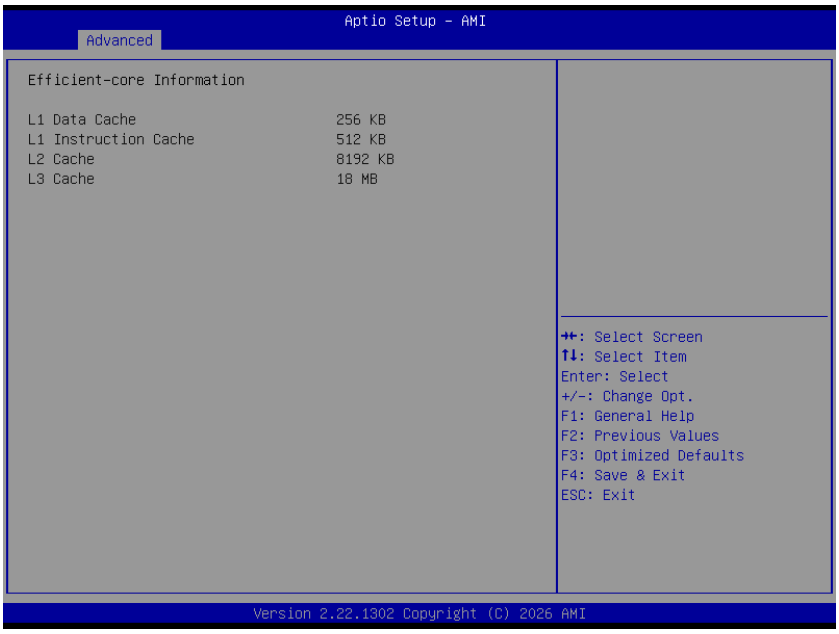


4.6.2.1.2 Efficient-core Information

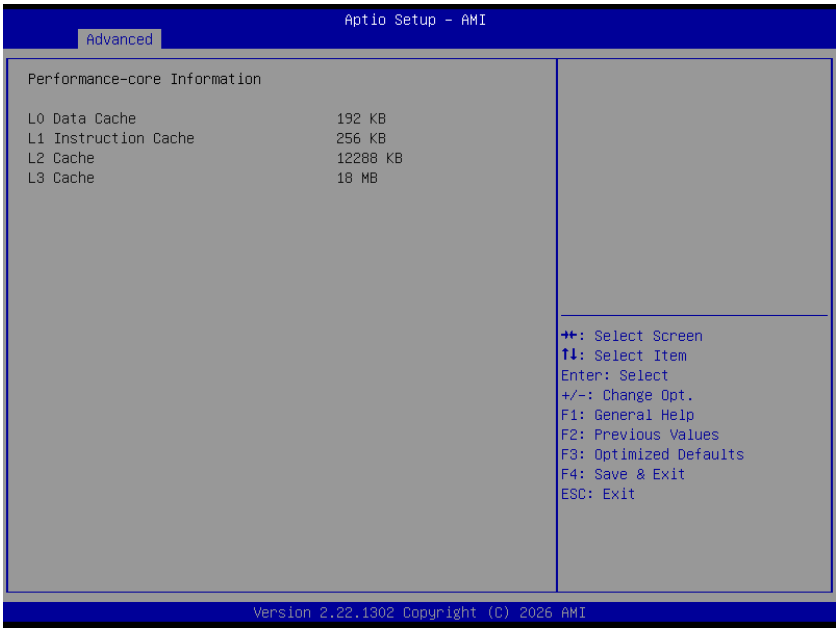

4.6.2.2 Power & Performance




4.6.2.2.1 CPU - Power Management Control

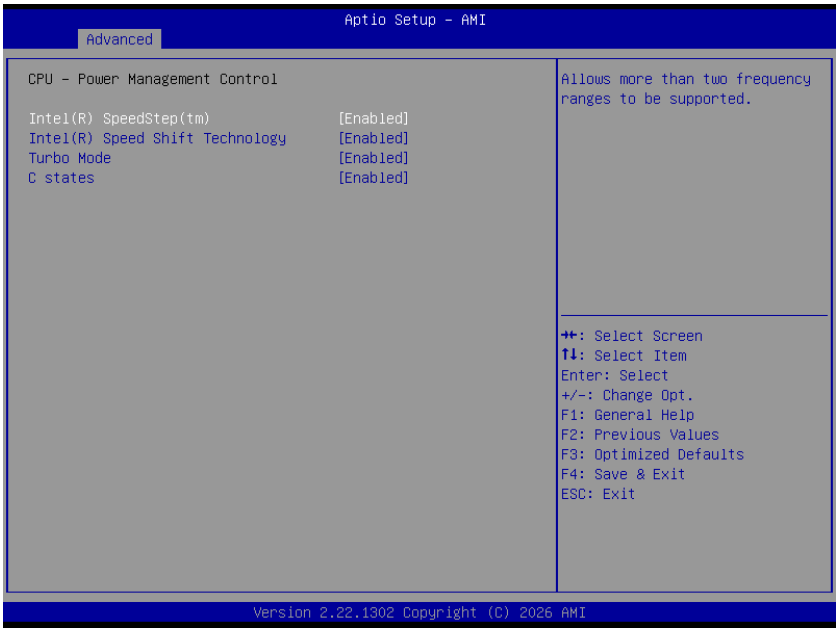

Item	Options	Description
Intel(R) SpeedStep(tm)	Disabled, Enabled**[Default]**	Allows more than two frequency ranges to be supported.
Intel(R) Speed Shift Technology	Disabled, Enabled**[Default]**	Enable/Disable Intel® Speed Shift Technology support. Enabling will expose the CPPC v2 interface to allow for hardware controlled P-states.
Turbo Mode	Disabled, Enabled**[Default]**	Enable/Disable processor Turbo Mode.


C states	Disabled, Enabled**[Default]**	Enable/Disable CPU Power Management. Allows CPU to go to C states when it's not 100% utilized.

4.6.2.3 System Agent (SA) Configuration

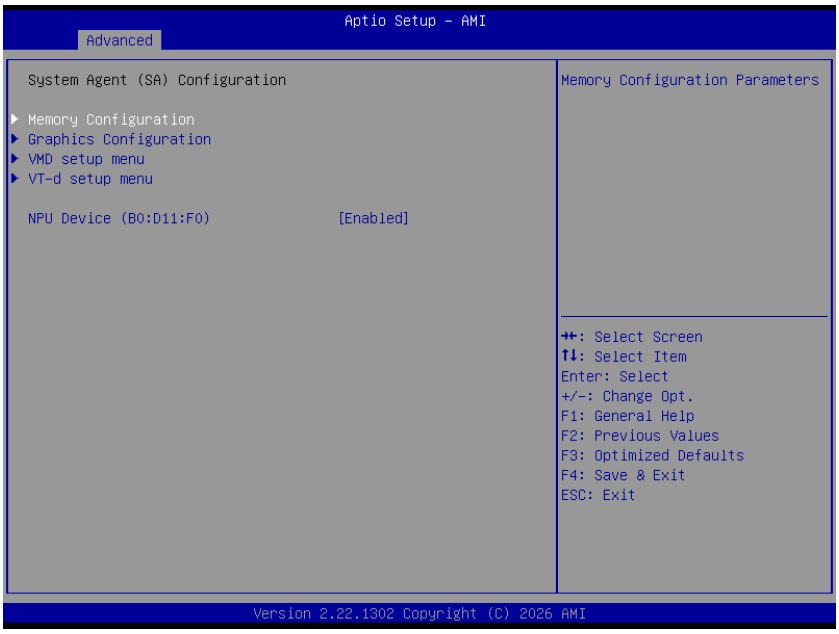


Item	Options	Description
NPU Device (B0:D11:F0)	Enabled**[Default]** Disabled,	Enable/Disable NPU Device.

4.6.2.3.1 Memory Configuration

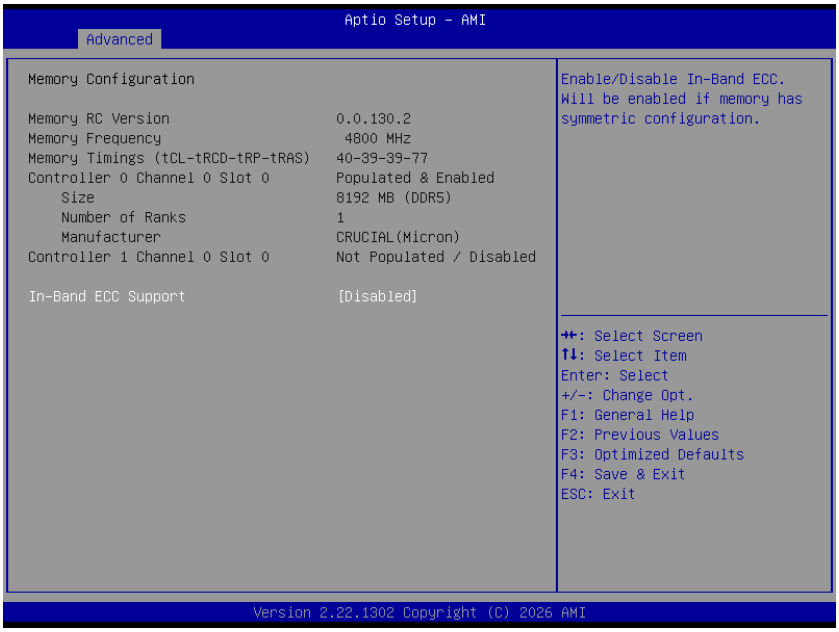


4.6.2.3.2 Graphics Configuration

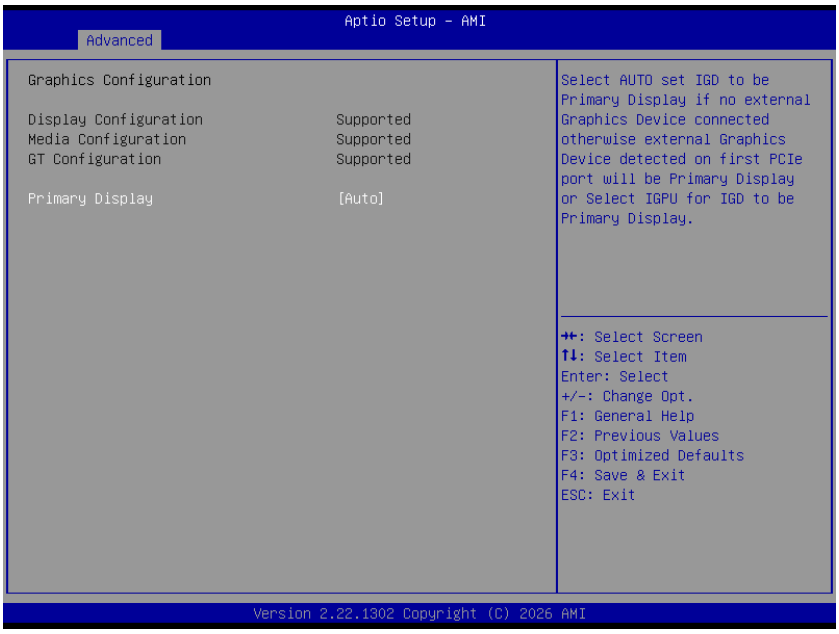


Item	Options	Description
Primary Display	Auto**[Default]** IGPU	Select AUTO set IGD to be Primary Display if no external Graphics Device connected otherwise external Graphics Device detected on first PCIe port will be Primary Display or Select IGPU for IGD to be Primary Display.

4.6.2.3.3 VMD setup menu

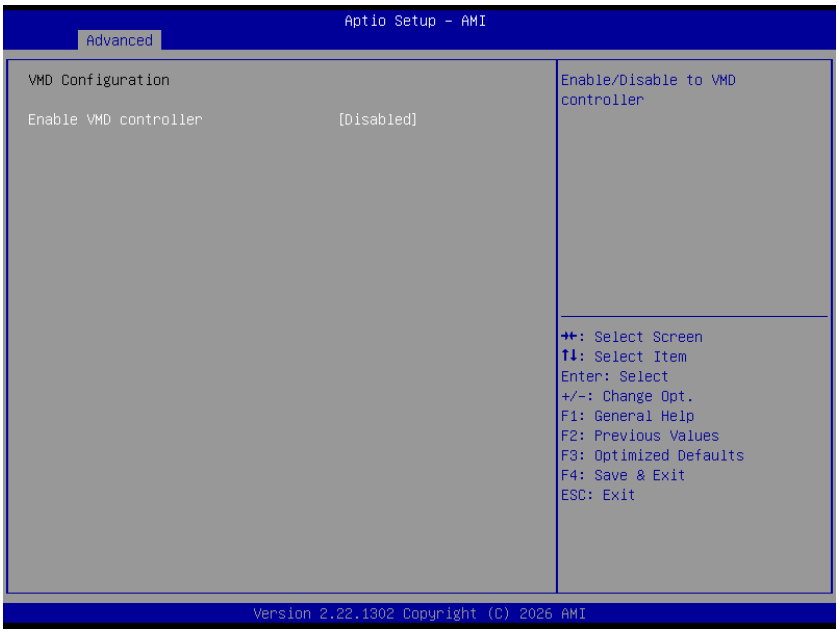


Item	Options	Description
Enable VMD controller	Disabled**[Default]**, Enabled	Enable/Disable to VMD controller


4.6.2.3.4 VT-d setup menu

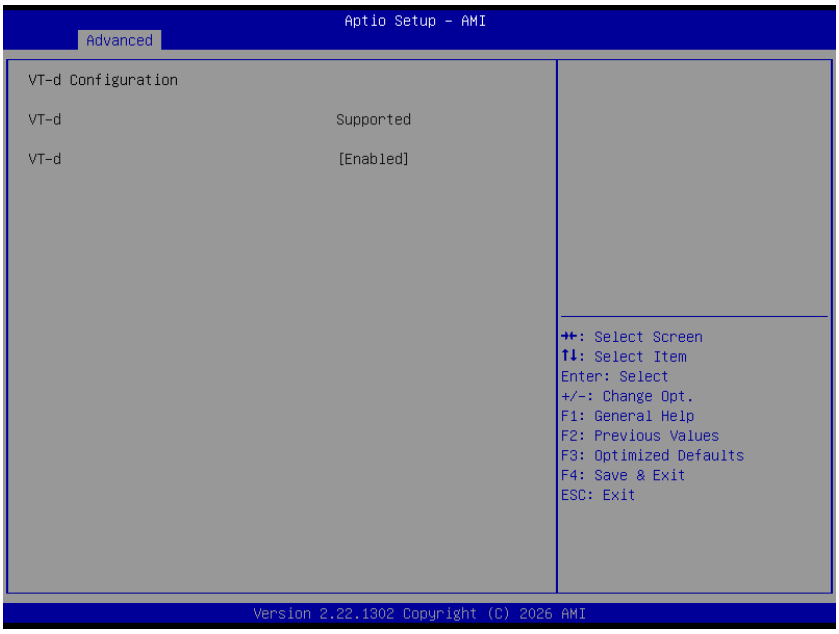


4.6.2.4 PCIE Configuration

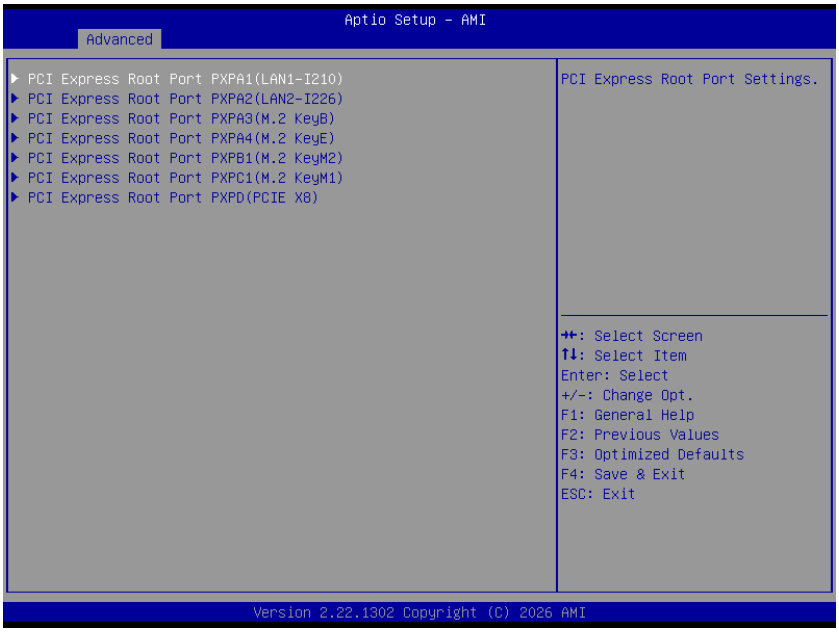

4.6.2.4.1 PCIE Configuration

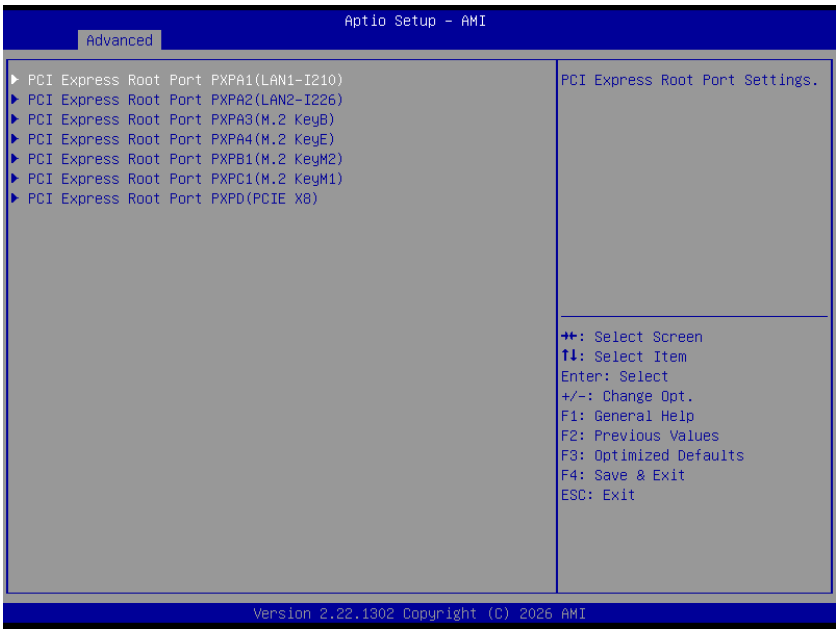


4.6.2.4.1.1 PCI Express Root Port PXPA1(LAN1-I210)

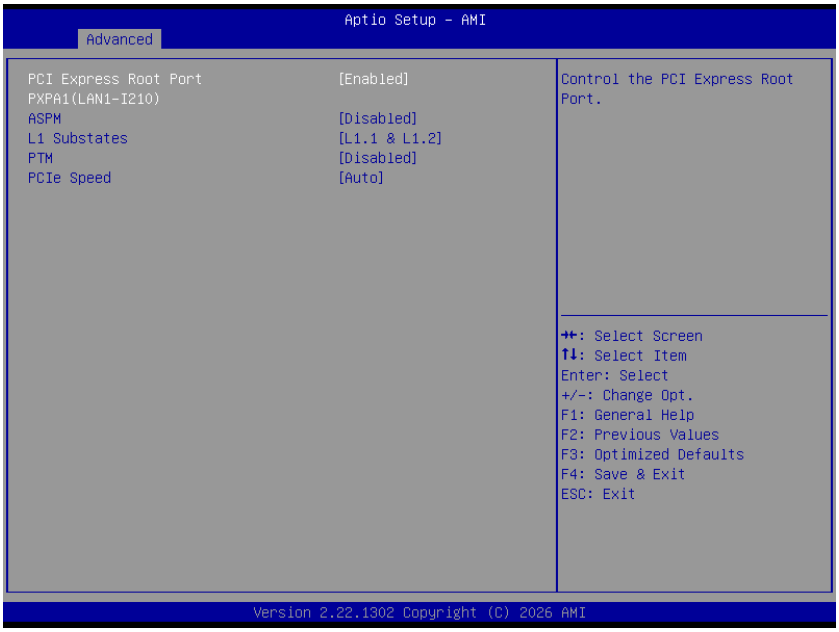

Item	Option	Description
PCI Express Root Port PXPA1(LAN1-I210)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM

L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PTM	Disabled Enabled**[Default]**	Enable/Disable Precision Time Measurement
PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.


4.6.2.4.1.2 PCI Express Root Port PXPA2 (LAN2-I226)

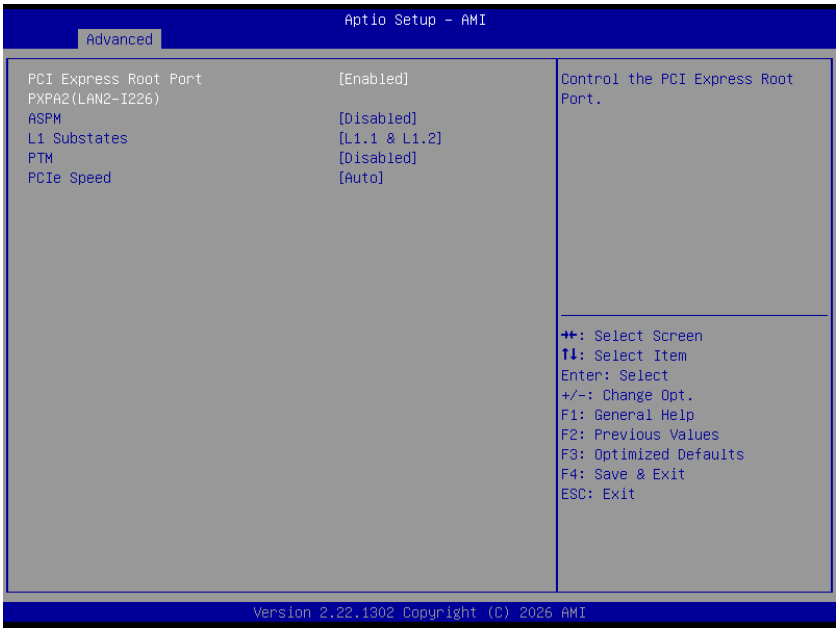

Item	Option	Description
PCI Express Root Port PXPA2 (LAN2-I226)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM
L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PTM	Disabled Enabled**[Default]**	Enable/Disable Precision Time Measurement


PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.

4.6.2.4.1.3 PCI Express Root Port PXPA3 (M.2 KeyB)

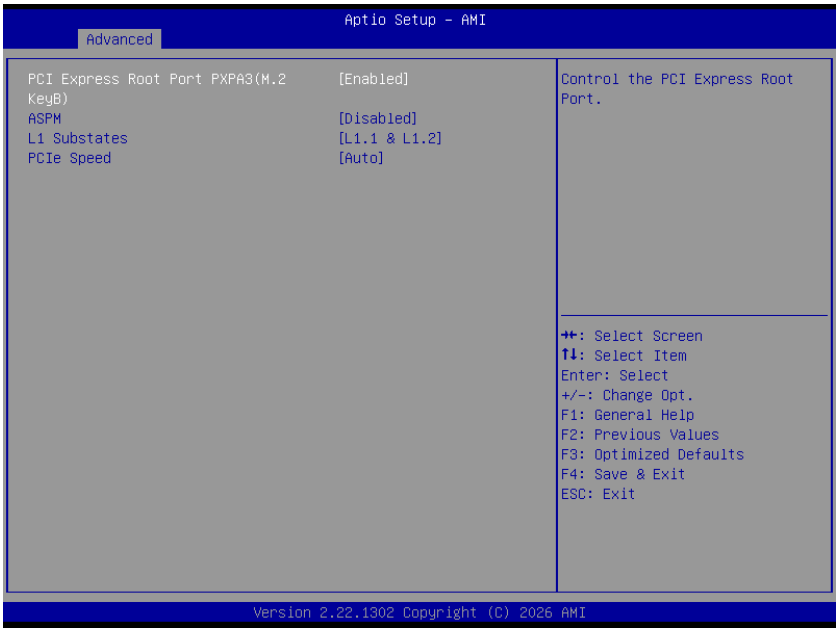


Item	Option	Description
PCI Express Root Port PXPA3 (M.2 KeyB)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM
L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.

4.6.2.4.1.4 PCI Express Root Port PXPA4 (M.2 KeyE)

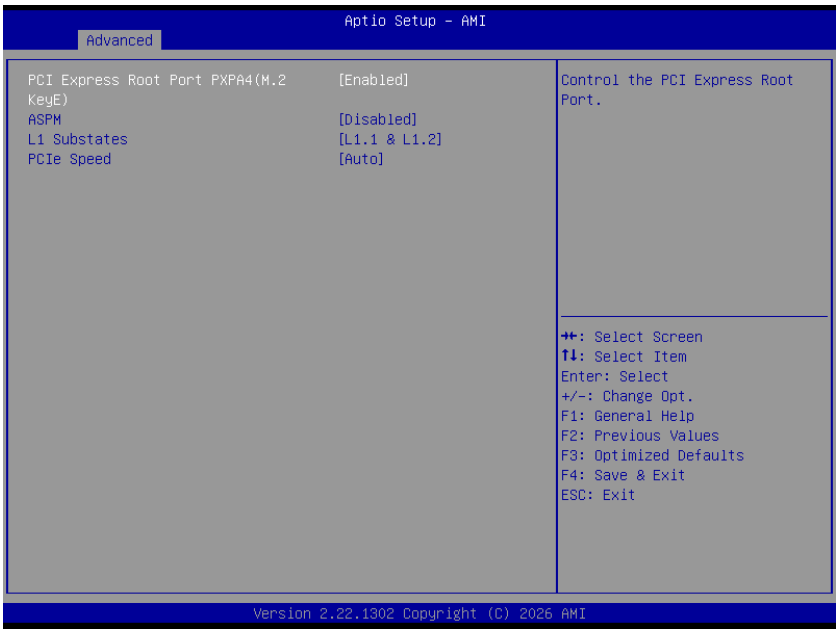


Item	Option	Description
PCI Express Root Port PXPA4 (M.2 KeyE)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM
L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.

4.6.2.4.1.5 PCI Express Root Port PXPB1 (M.2 KeyM2)

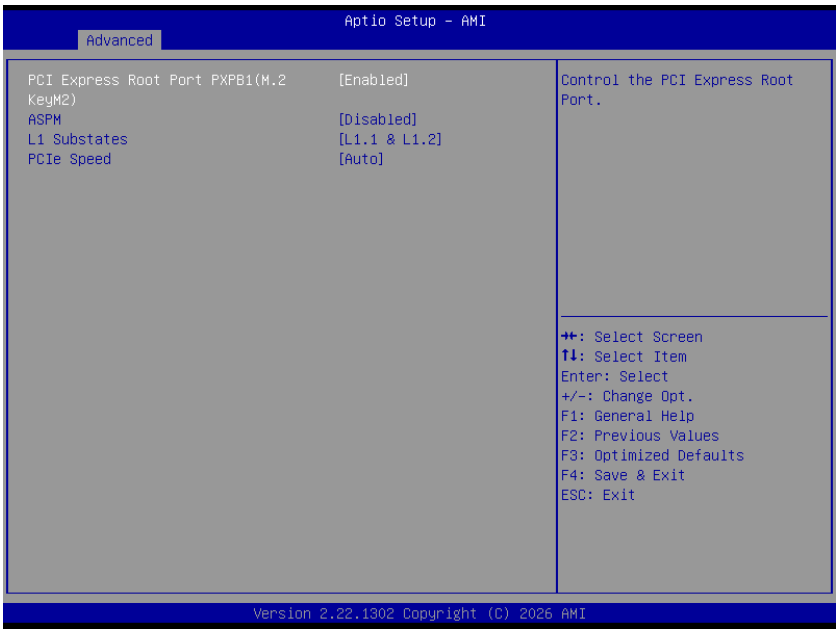


Item	Option	Description
PCI Express Root Port PXPB1 (M.2 KeyM2)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM
L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.

4.6.2.4.1.6 PCI Express Root Port PXPC1 (M.2 KeyM1)

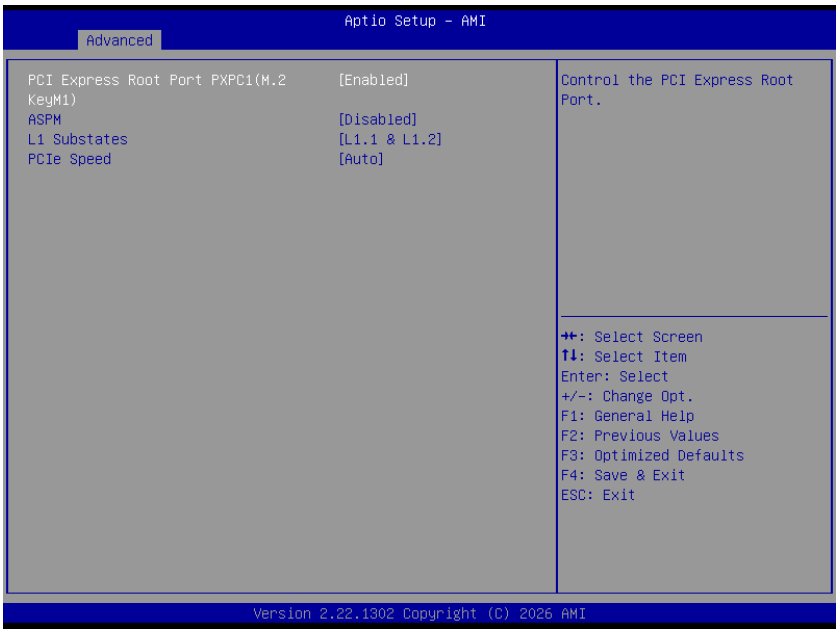


Item	Option	Description
PCI Express Root Port PXPC1 (M.2 KeyM1)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM
L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.

4.6.2.4.1.7 PCI Express Root Port PXPD (PCIE X8)

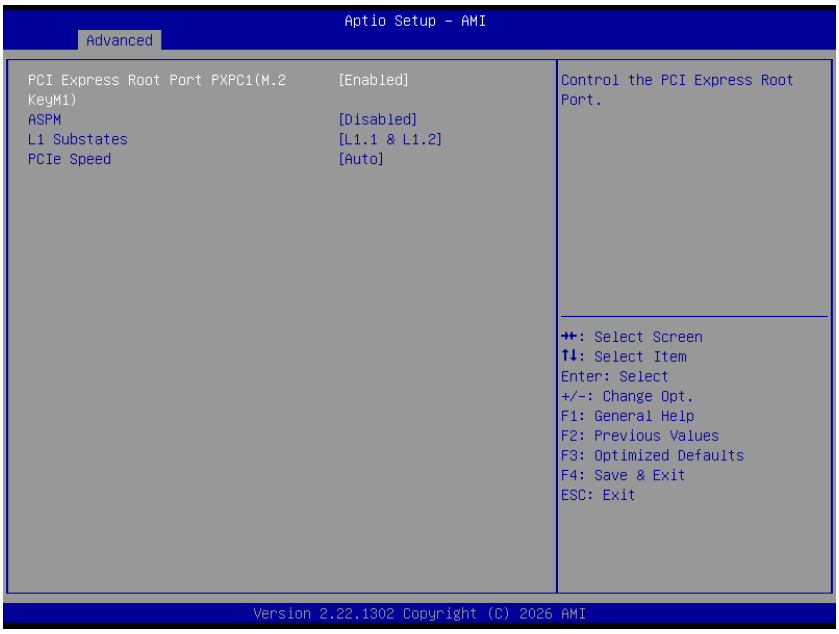


Item	Option	Description
PCI Express Root Port PXPD (PCIE X8)	Disabled Enabled**[Default]**	Control the PCI Express Root Port.
ASPM	Disabled**[Default]** L0s L1 L0sL1 Auto	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM
L1 Substates	Disabled L1.1 L1.1 & L1.2**[Default]**	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2 Gen 3 Gen 4 Gen 5	Configure PCIe Speed.

4.6.2.5 PCH-IO Configuration

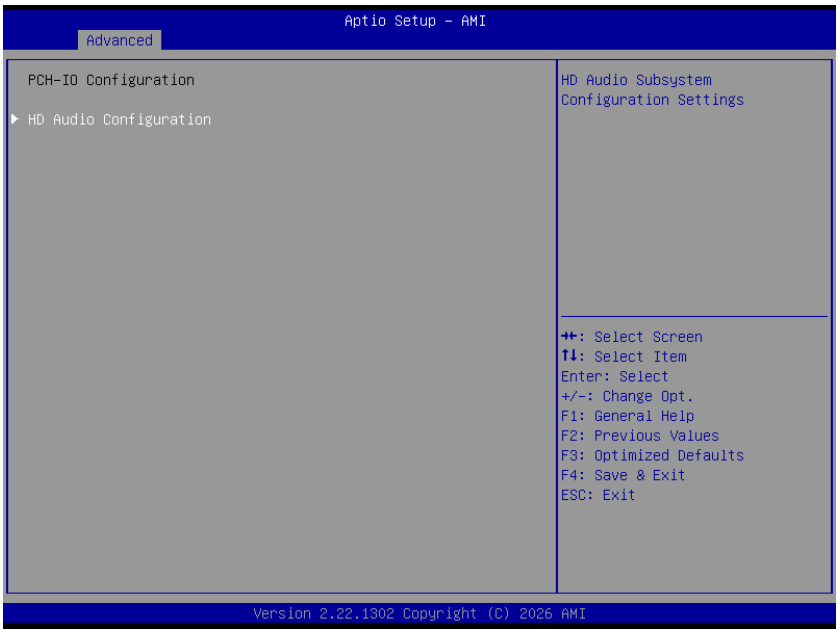


4.6.2.5.1 HD Audio Configuration

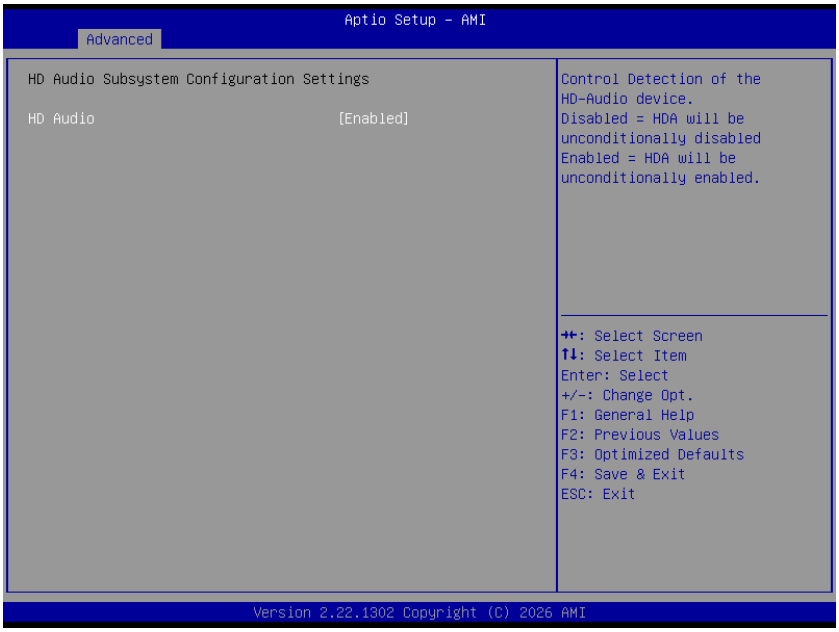


Item	Option	Description
HD Audio	Disabled Enabled**[Default]**	Control Detection of the HD-Audio device. Disabled = HDA will be unconditionally disabled Enabled = HDA will be unconditionally enabled.

4.6.2.6 PCH-FW Configuration

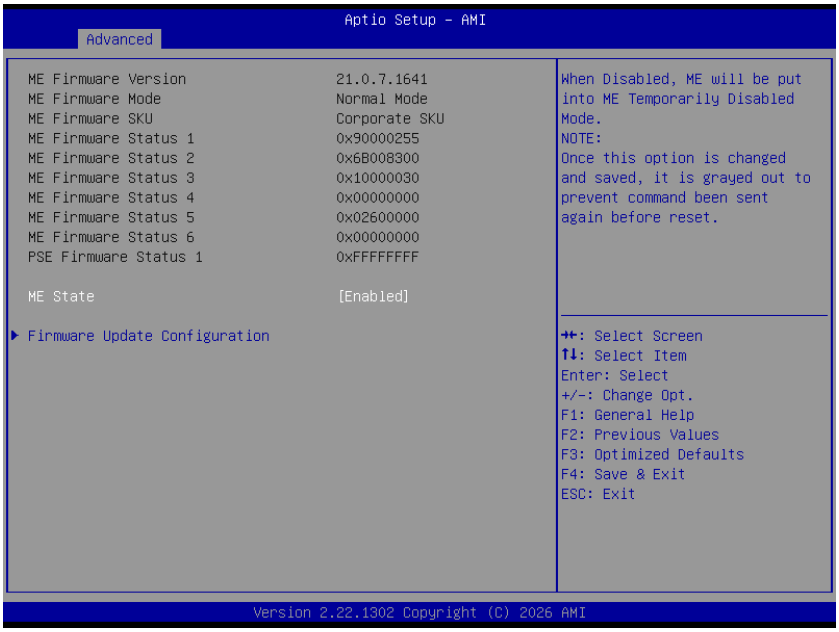

Item	Option	Description
ME State	Disabled Enabled**[Default]**	When Disabled, ME will be put into ME Temporarily Disabled Mode. NOTE: Once this option is changed and saved, it is grayed out to prevent command been sent again before reset.

4.6.2.6.1 Me FW Image Re-Flash

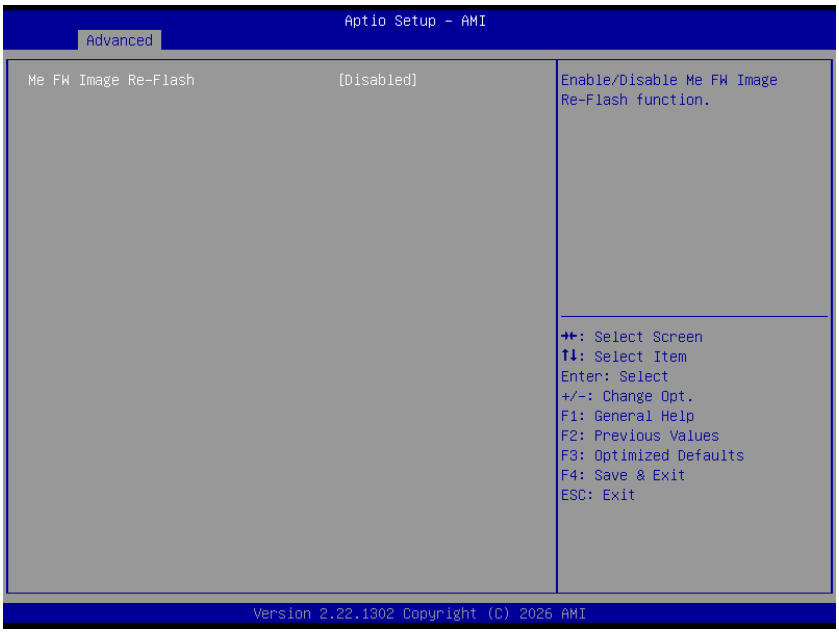


Item	Option	Description
Me FW Image Re-Flash	Disabled**[Default]** Enabled	Enable/Disable Me FW Image Re-Flash function.

4.6.2.7 Trusted Computing




Item	Option	Description
Security Device Support	Disabled Enabled**[Default]**	Enables or Disables BIOS support for security device. When its disabled, O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.

4.6.2.8 ACPI Settings

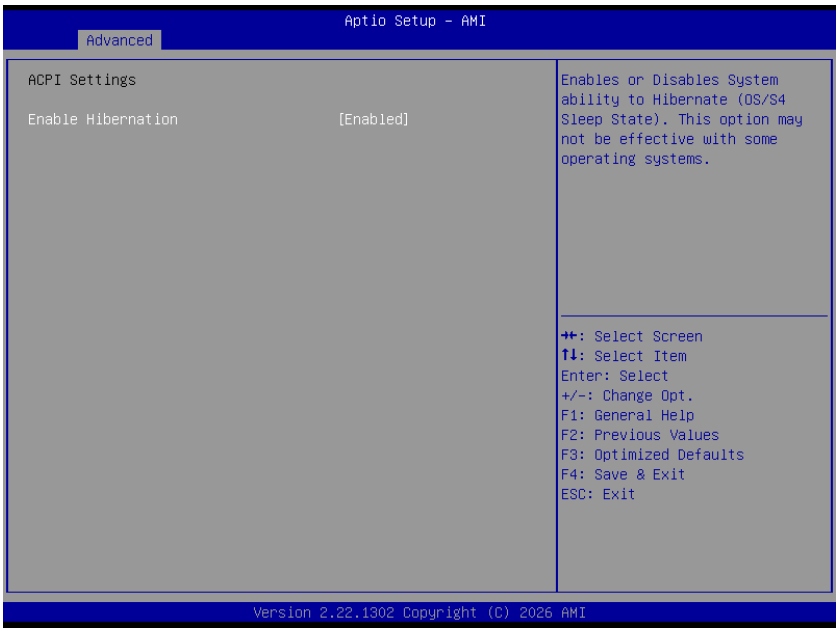

Item	Options	Description
Enable Hibernation	Disabled Enabled**[Default]**,	Enables or Disables System ability to Hibernate (OS/S4 Sleep State). This option may not be effective with some Operating System.


4.6.2.9 Board & Panel Configuration

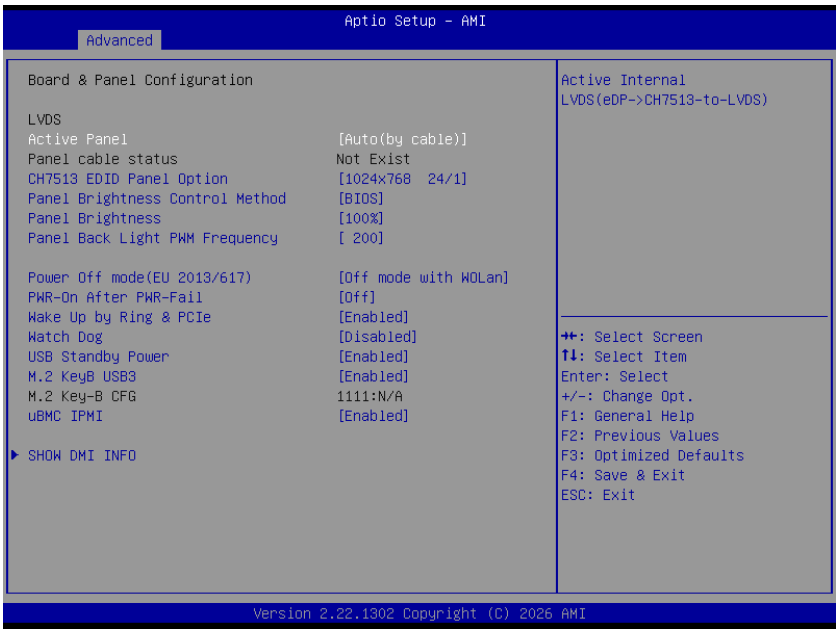

Item	Options	Description
Active Panel	Enabled Disabled Auto (by cable) **[Default]**,	Active Internal LVDS(eDP->CH7513-to-LVDS)
CH7513 EDID Panel Option	1024x768 24/1**[Default]**, 800x600 18/1 1024x768 18/1 1366x768 18/1 1024x600 18/1 1280x800 18/1 1920x1200 24/2 1920x1080 18/2 1280x1024 24/2 1440x900 18/2 1600x1200 24/2 1366x768 24/1 1920x1080 24/2 7513-eDP	Port1-EDP to LVDS (Chrotel 7513) Panel EDID Option
Panel Brightness Control Method	BIOS**[Default]**, OS driver	Panel Brightness Control Method. 1.BIOS 2.OS Driver
Panel Brightness	00% 25% 50% 75% 100%**[Default]**,	Select Panel back light PWM duty.


Panel Back Light PWM Frequency	200**[Default]**, 1k 10k 20k	Select Panel back light PWM Frequency.
Power Off mode (EU 2013/617)	Traditional S5 Off mode w/o WOL(ErP) Off mode with WOLan**[Default]**,	Off mode with WOLan: Wakeup from Lan1/PWR button Off mode w/o WOL(ErP) Wakeup from PWR button. When the default setting is off mode with WOLane1, the system cannot be woken up via USB port after entering S4 from OS. Wake up is only possible through LAN1 port. If wake up via USB port is required, please change the setting to Traditional S5.
PWR-On After PWR-Fail	Off**[Default]**, On Last state	AC loss resume.
Wake Up by Ring & PCIe	Disabled Enabled**[Default]**,	Controls the system wake-up behavior from Ring and shared PCIe devices (SYS_WAKE#). Note: Disabling this option will also disable Wi-Fi WOL and related S3/S4 wake functions due to shared hardware routing.
Watch Dog	Disabled**[Default]**, 30 Sec 40 Sec 50 Sec 1 Min 2 Min 10 Min 30 Min	Select Watch Dog.
USB Standby Power	Disabled Enabled**[Default]**,	Enable/Disable USB Standby Power during S3/S4/S5
M.2 KeyB USB3	Auto Disabled Enabled**[Default]**,	M.2 KeyB USB3 Auto/Enable/Disable
uBMC IPMI	Disabled Enabled**[Default]**,	Enabled/Disabled uBMC IPMI Function.

4.6.2.10 SHOW DMI INFO

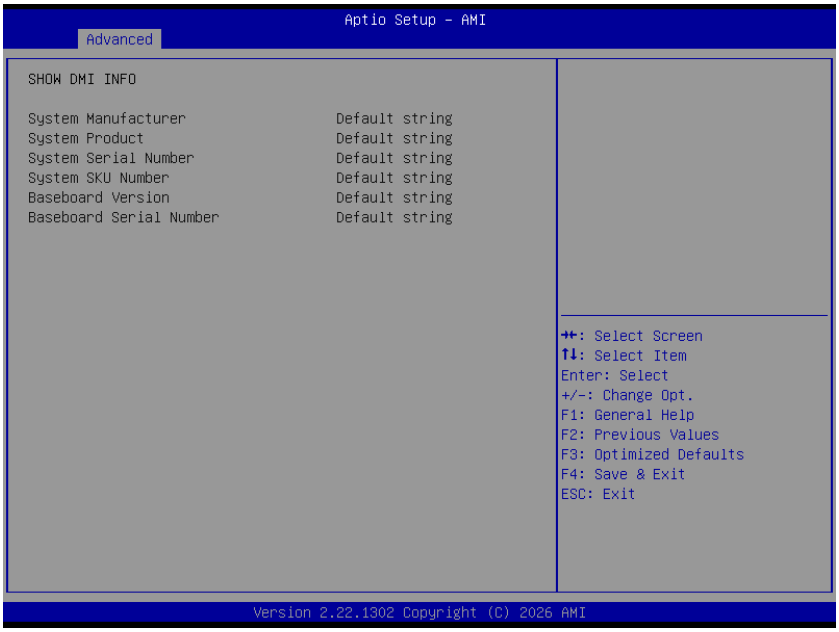

4.6.2.11 Super IO Configuration


You can use this item to set up or change the IT5792 Super IO configuration for serial ports. Please refer to 4.6.2.11.1~ 4.6.2.11.6 for more information.

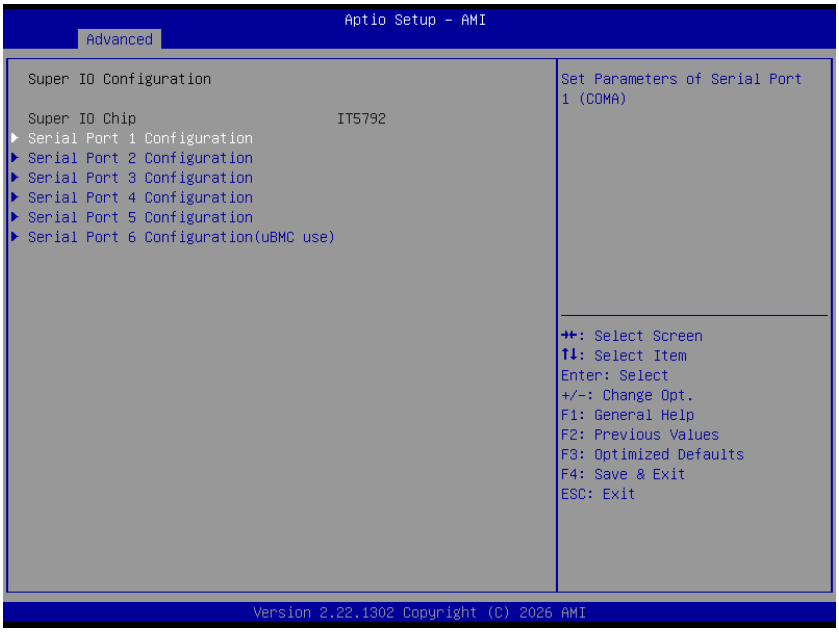

Item	Description
Serial Port 1 Configuration	Set Parameters of Serial Port 1 (COMA).
Serial Port 2 Configuration	Set Parameters of Serial Port 2 (COMB).
Serial Port 3 Configuration	Set Parameters of Serial Port 3 (COMC).
Serial Port 4 Configuration	Set Parameters of Serial Port 4 (COMD).
Serial Port 5 Configuration	Set Parameters of Serial Port 5 (COME).


Serial Port 6 Configuration(uBMC use)	Set Parameters of Serial Port 6 (COMF).

4.6.2.11.1 Serial Port 1 Configuration

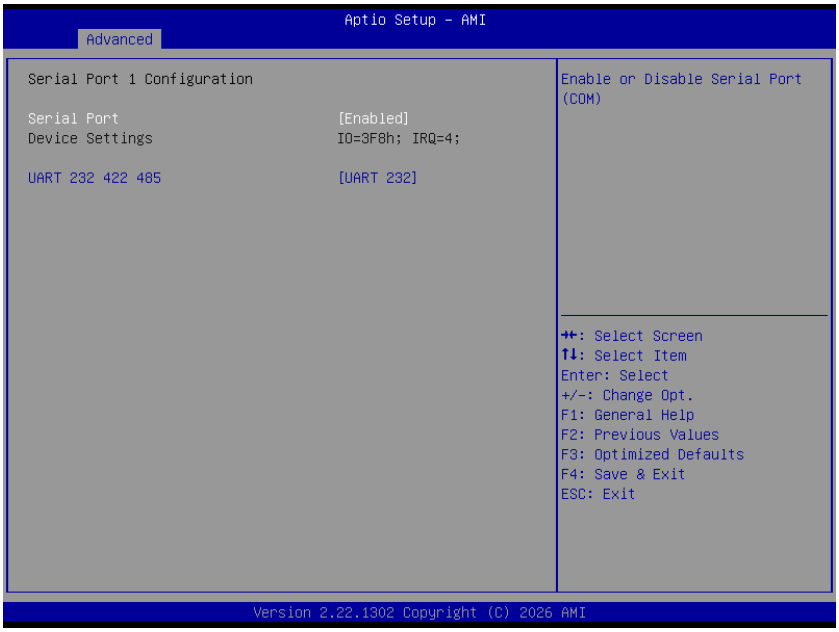


Item	Option	Description
Serial Port	Disabled Enabled**[Default]**,	Enable or Disable Serial Port (COM).
UART 232 422 485	UART 232**[Default]**, UART 422 UART 485	Change the Serial Port as RS232/422/485

4.6.2.11.2 Serial Port 2 Configuration

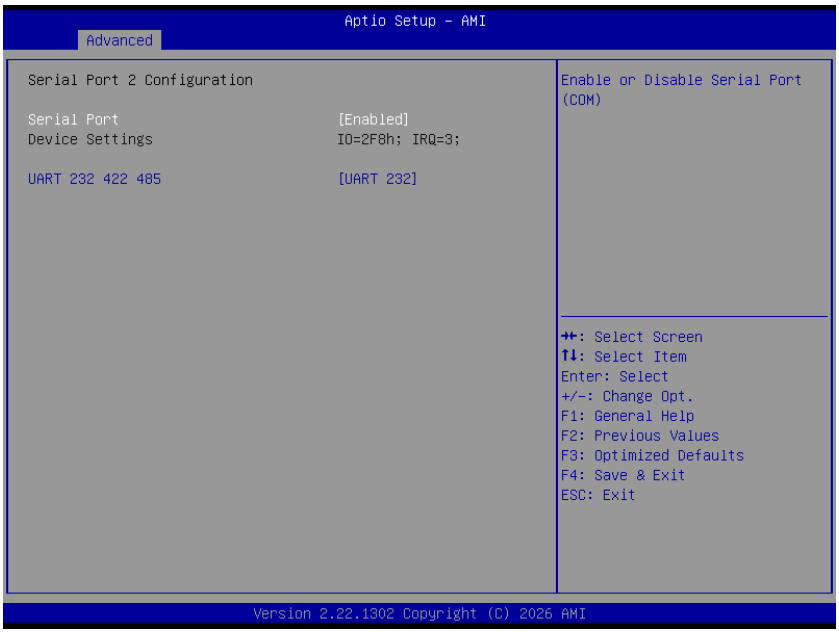


Item	Option	Description
Serial Port	Disabled Enabled**[Default]**,	Enable or Disable Serial Port (COM).
UART 232 422 485	UART 232**[Default]**, UART 422 UART 485	Change the Serial Port as RS232/422/485

4.6.2.11.3 Serial Port 3 Configuration

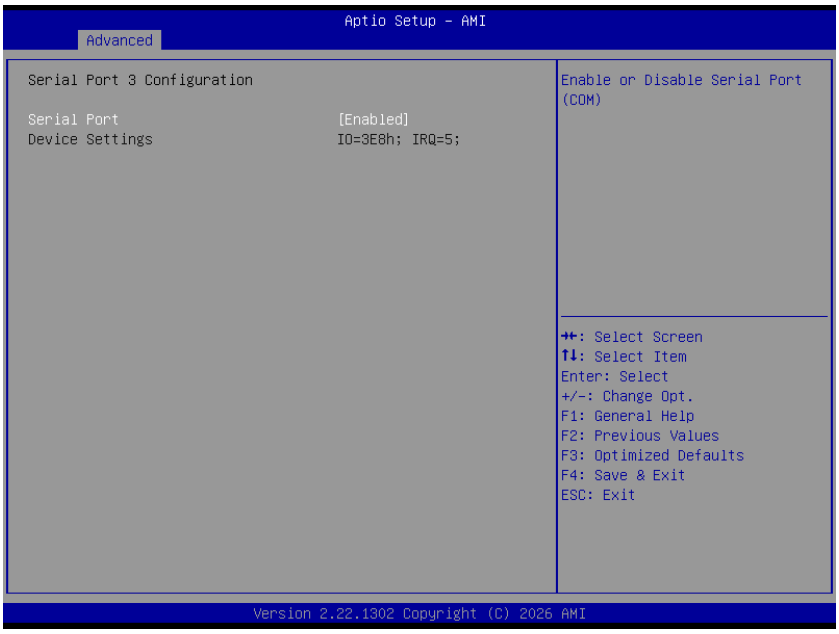


Item	Option	Description
Serial Port	Disabled Enabled**[Default]**,	Enable or Disable Serial Port (COM).

4.6.2.11.4 Serial Port 4 Configuration

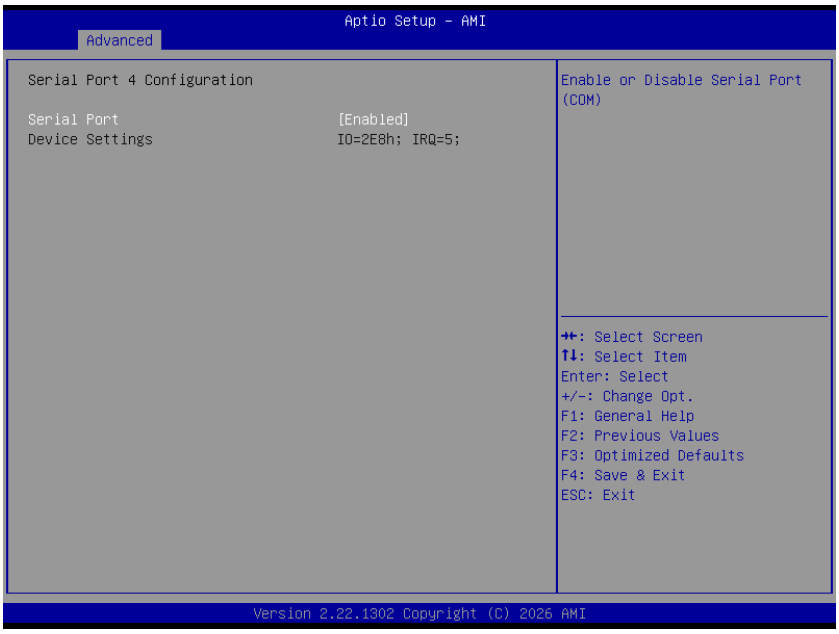


Item	Option	Description
Serial Port	Disabled Enabled**[Default]**,	Enable or Disable Serial Port (COM).

4.6.2.11.5 Serial Port 5 Configuration

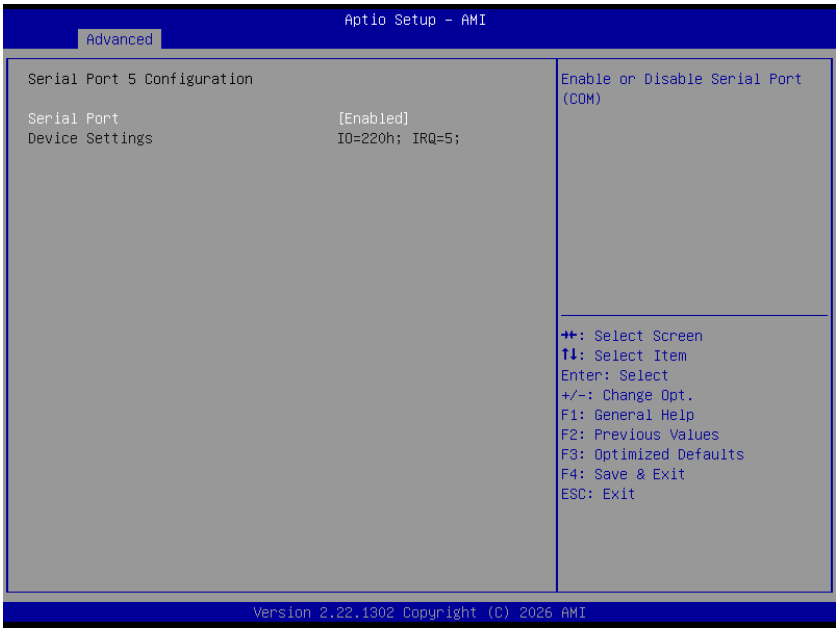


Item	Option	Description
Serial Port	Disabled Enabled**[Default]**,	Enable or Disable Serial Port (COM).

4.6.2.11.6 Serial Port 6 Configuration

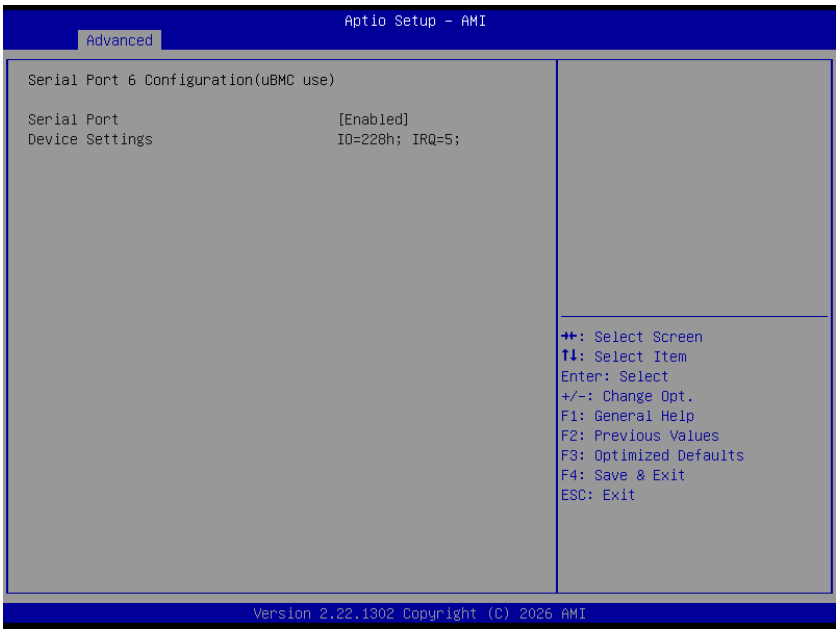


4.6.2.12 EC 5792 HW monitor

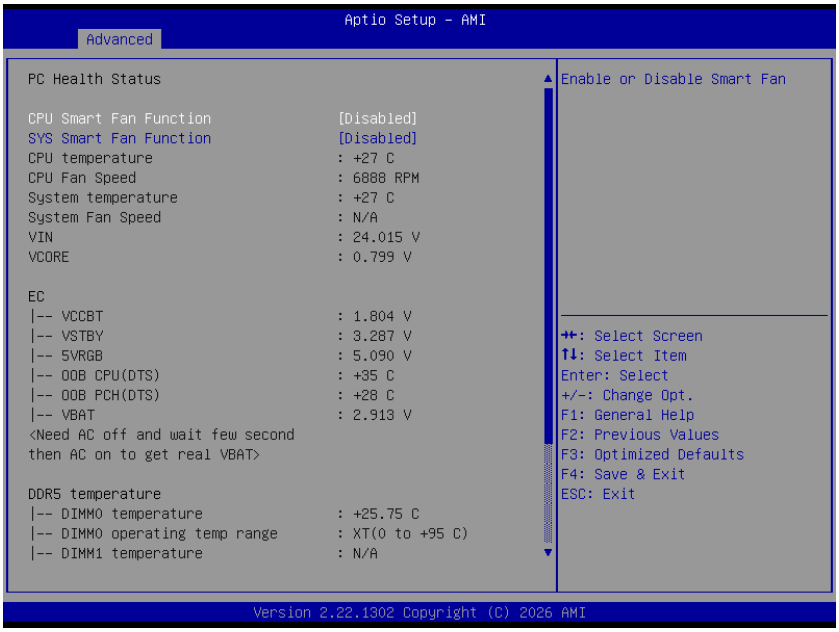


Item	Options	Description
CPU Smart Fan Function	Disabled**[Default]** Enabled,	Enable or Disable Smart Fan.
SYS Smart Fan Function	Disabled**[Default]** Enabled,	Smart Fan Mode select

4.6.2.13 S5 RTC Wake Settings

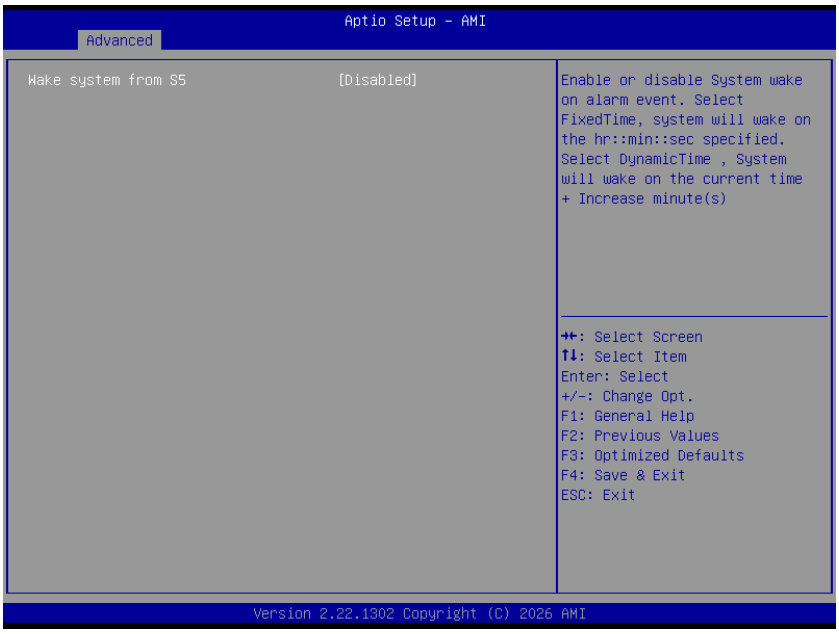

Item	Options	Description
Wake system from S5	Disabled**[Default]** Fixed Time Dynamic Time	Enable or disable System wake on alarm event. Select FixedTime, system will wake on the hr::min::sec specified. Select DynamicTime, System will wake on the current time + Increase minute(s)


4.6.2.14 Serial Port Console Redirection

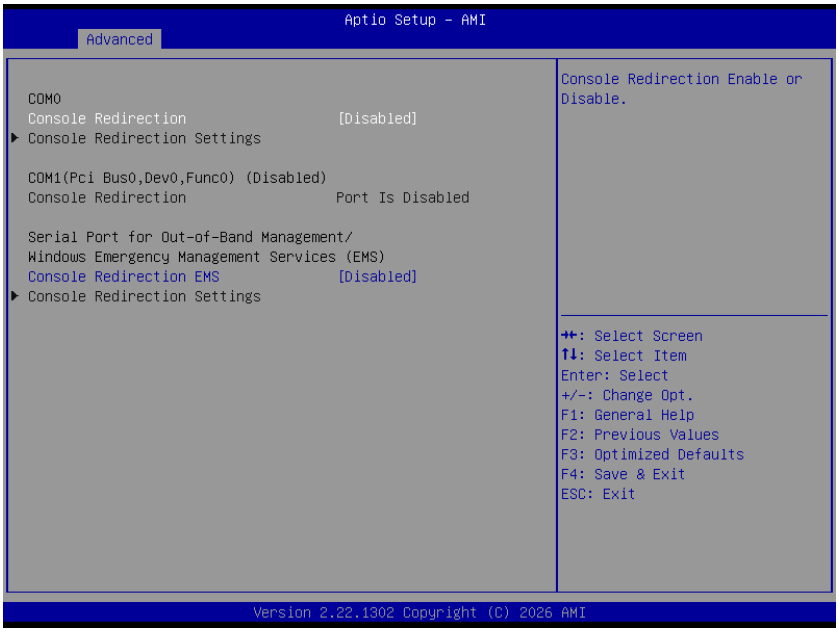

Item	Options	Description
Console Redirection	Disabled**[Default]** Enabled,	Console Redirection Enable or Disable.

Console Redirection EMS	Disabled**[Default]** Enabled,	Console Redirection Enable or Disable.


4.6.2.15 Connectivity Configuration

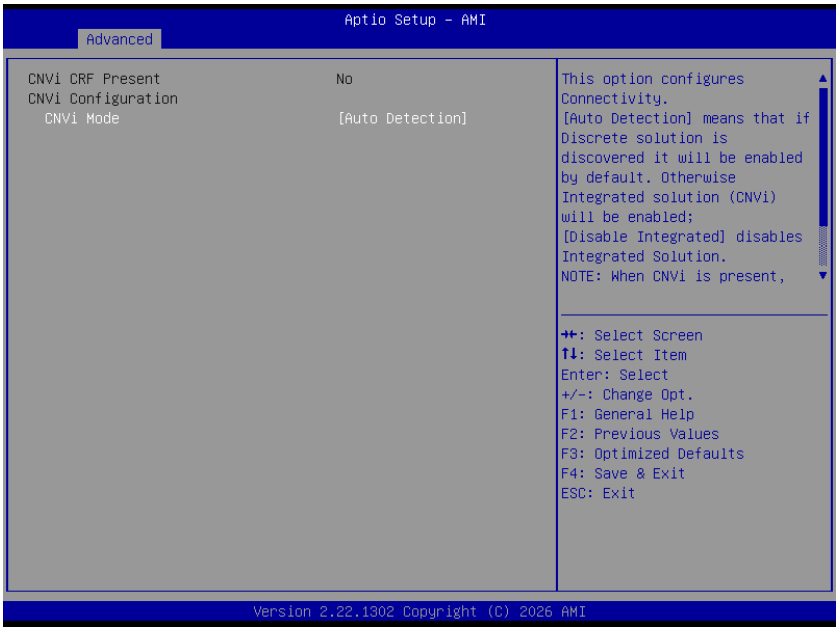

Item	Options	Description
CNVi Mode	Disable Integrated Auto Detection**[Default]**	This option configures Connectivity. [Auto Detection] means that if Discrete solution is discovered it will be enabled by default. Otherwise Integrated solution (CNVi) will be enabled; [Disable Integrated] disables Integrated Solution. NOTE: When CNVi is present, the GPIO pins that are used for radio interface cannot be assigned to the other native function.


4.6.2.16 USB Configuration

The USB Configuration menu helps read USB information and configures USB settings.

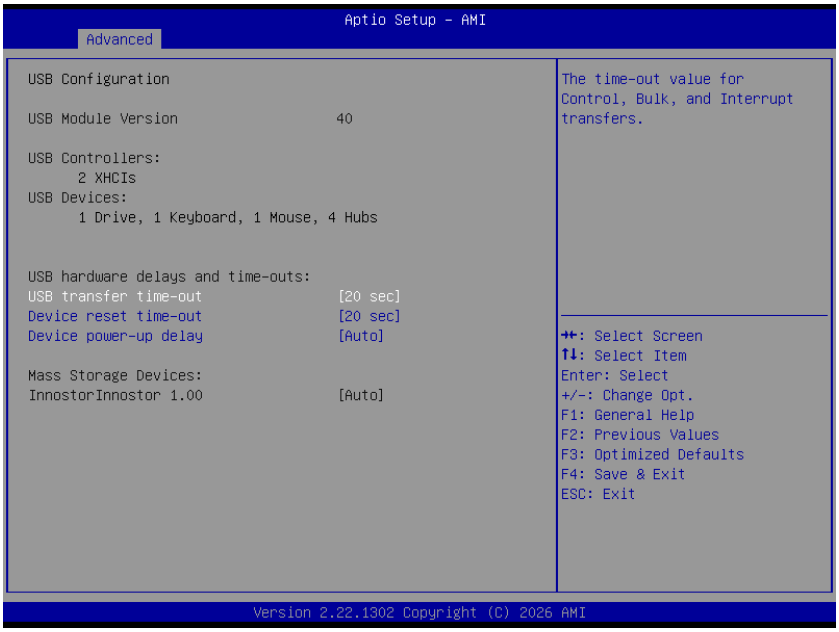


Item	Options	Description
USB transfer time-out	1 sec 5 sec 10 sec 20 sec**[Default]**	The time-out value for Control, Bulk, and Interrupt transfers.
Device reset time-out	10 sec 20 sec**[Default]** 30 sec 40 sec	USB mass storage device Start Unit command time-out.
Device power-up delay	Auto**[Default]** Manual	Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100 ms, for a Hub port the delay is taken form Hub descriptor.

4.6.2.17 Network Stack Configuration

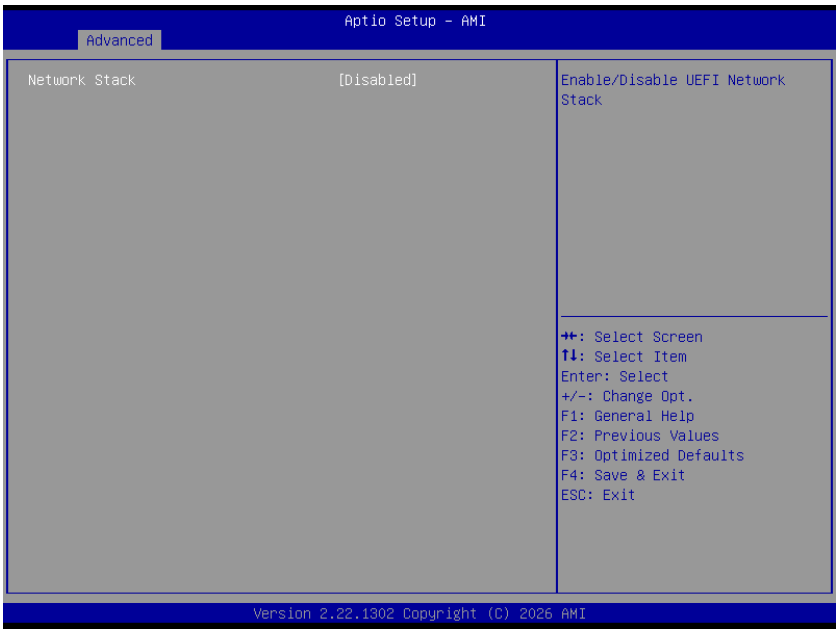

Item	Options	Description
Network Stack	Disabled**[Default]** Enabled,	Enable/Disable UEFI Network Stack

4.6.2.18 NVMe Configuration

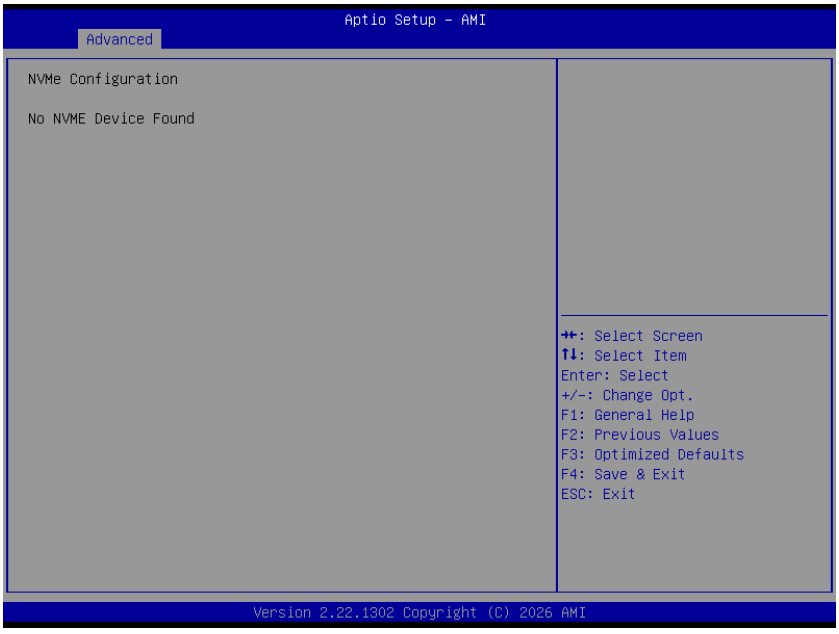

4.6.3 Security




- **Setup Administrator Password**

Set setup Administrator Password

- **User Password**


Set User Password

4.6.3.1 Security Boot

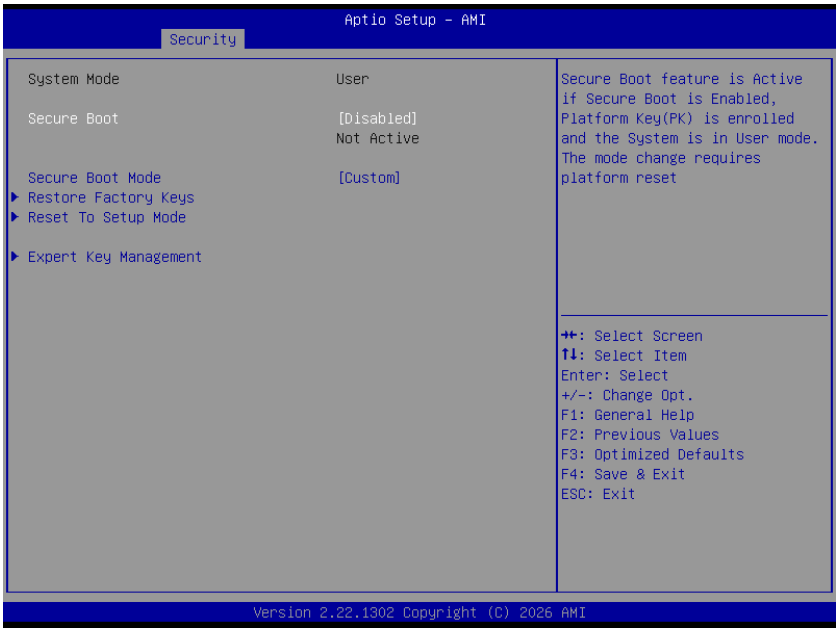


Item	Option	Description
Secure Boot	Disabled**[Default]** Enabled	Secure Boot feature is Active if Secure Boot is Enabled, Platform Key(PK) is enrolled and the System is in User mode. The mode change requires platform reset
Secure Boot Mode	Standard Custom**[Default]**	Secure Boot mode options: Standard or Custom. In Custom mode, Secure Boot Policy variables can be configured by a physically present user without full authentication

4.6.3.1.1 Expert Key Management

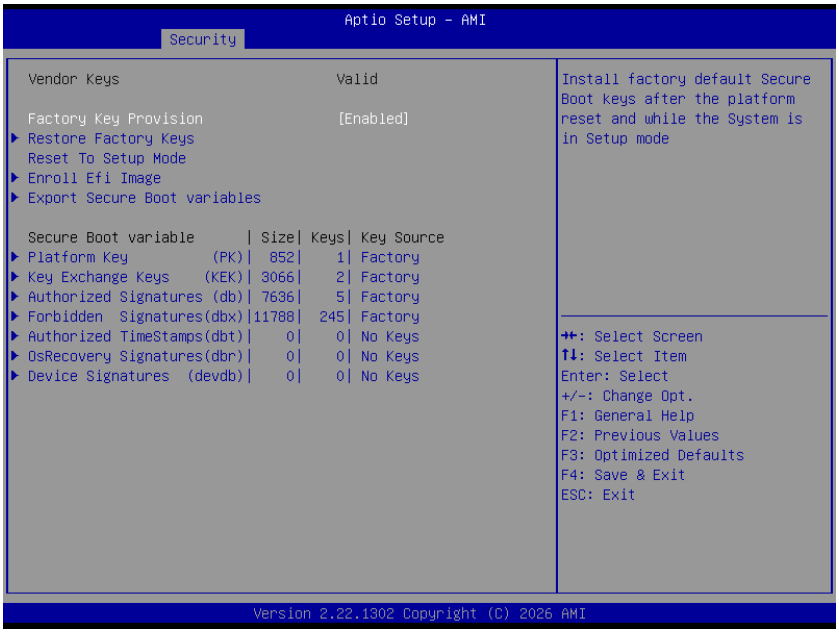

Item	Option	Description
Factory Key Provision	Disabled**[Default]** Enabled	Install factory default Secure Boot keys after the platform reset and while the System is in Setup mode

4.6.4 Boot

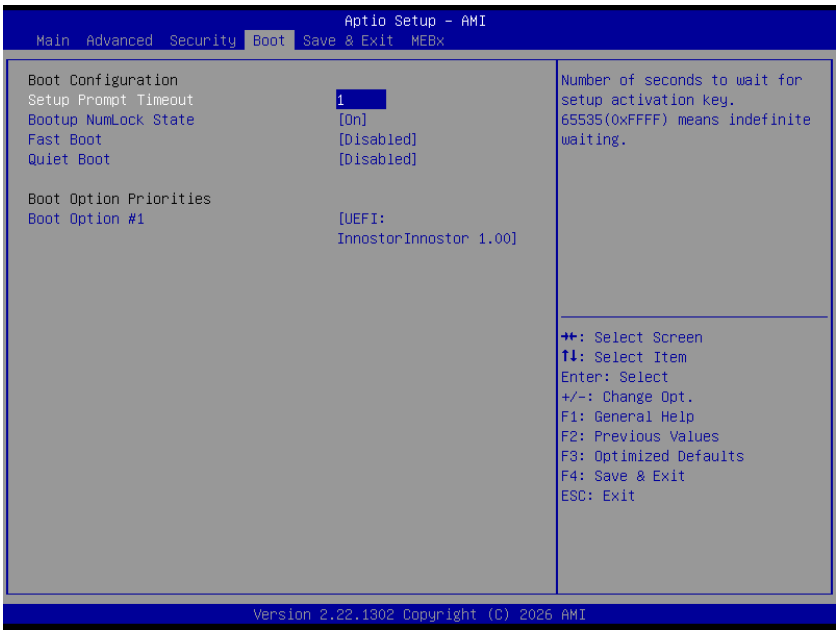

4.6.5 Save and Exit



4.6.5.1 *Save Changes and Reset*

Reset the system after saving the changes.

4.6.5.2 *Discard Changes and Reset*

Any changes made to BIOS settings during this session of the BIOS setup program are discarded. The setup program then exits and reboots the controller.


4.6.5.3 *Restore Defaults*

This option restores all BIOS settings to the factory default. This option is useful if the controller exhibits unpredictable behavior due to an incorrect or inappropriate BIOS setting.

4.6.5.4 *Launch EFI Shell from filesystem device*


Attempts to Launch EFI Shell application (Shellx64.efi) from one of the available filesystem devices.


4.6.6 MEBx

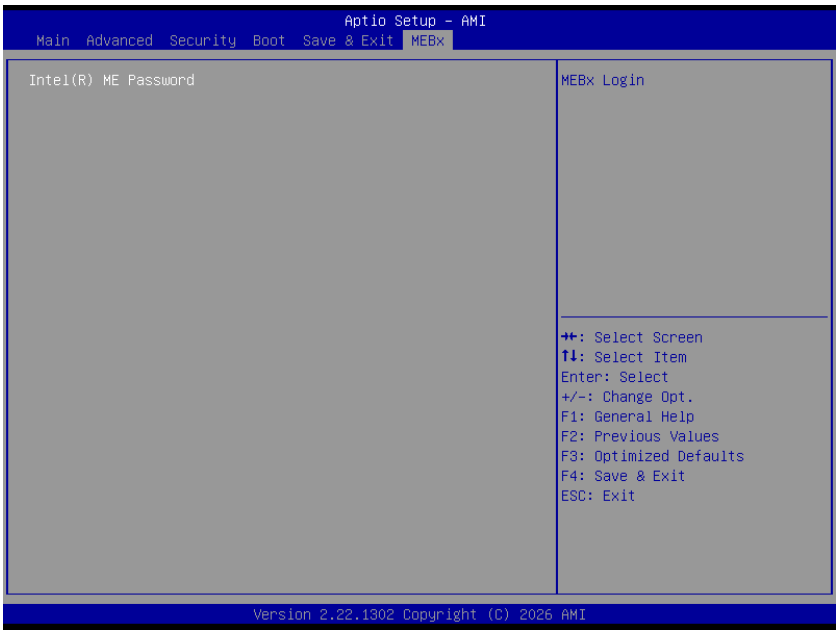


Item	Description
Intel(R) ME Password	MEBx Login

5. Mechanical Drawing

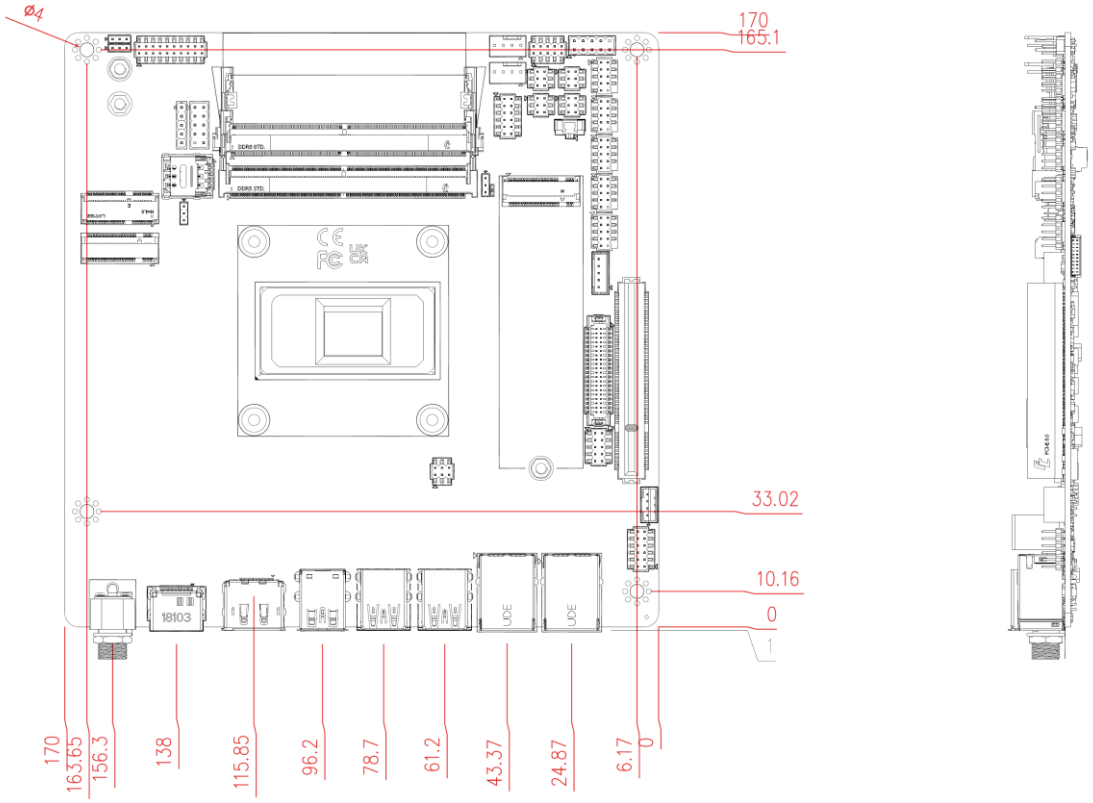

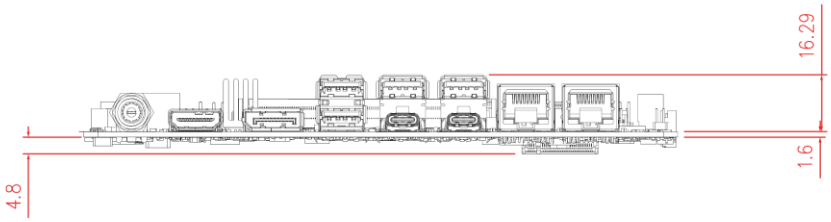

Unit: mm

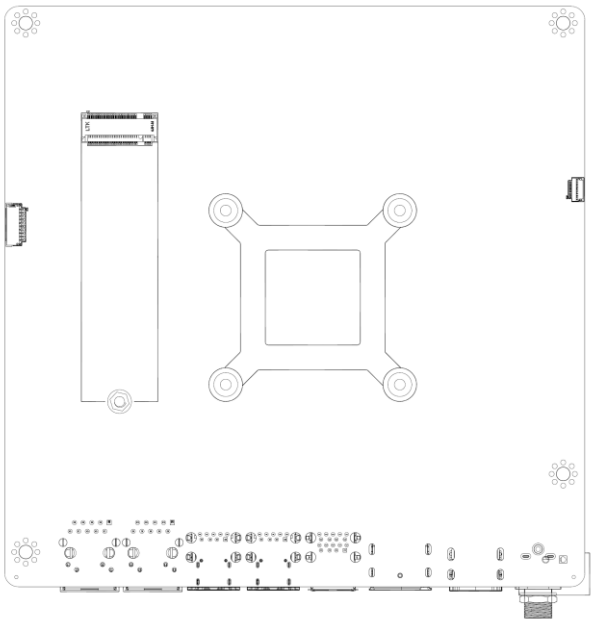

Unit: mm